

Industrial Heat Tracing Products & Services

IEC / ATEX





BUILDING A MORE SUSTAINABLE AND ELECTRIFIED WORLD

We provide freeze protection and heat management solutions to a wide range of industrial markets: oil & gas, (petro) chemical, pharmaceutical, manufacturing, power, mining...

Our solutions also support the energy transition, with applications in LNG, Clean Fuels, Hydrogen, Carbon Capture & Storage.



Energy Efficiency

Our solutions improve energy efficiency for our customers.



Customer Productivity

Our solutions reduce labor cost in design and installation, improve utilization and reduce total cost of ownership.



Safety

Our solutions improve end-user safety and help our customers enhance the safety of their operations.



Resiliency and Protection

Our solutions add resiliency to critical systems by helping keep them safe from natural and manmade disruptions.



Lifespan and Serviceability

Our solutions extend the lifespan of our customers' systems, reducing waste and lowering cost.



Eco-Friendly

We support customers sustainability goals by developing environmentally friendly products and solutions.



TIME-TESTED QUALITY

QUALITY

We are the **inventor** of self-regulating heating technology. Our cables are designed & manufactured in the USA since 1972.

We offer complete systems

20+ year design life

10-year product warranty

High Power Retention (HPR) technology

Highest **QUALITY**Products



200+ EXPERT DESIGNERS 6000+ INSTALLERS

EXPERTISE

We offer turnkey project solutions, delivering seamless project management, efficient system designs, on-time delivery, schedule compression & power distribution savings

200+ expert designers

300+ trained field personnel

600,000+ optimized EHT circuits

Engineering automation

EXPERTISE Optimal System Design & Installation



600,000KM INSTALLED = 15X AROUND THE GLOBE

RELIABLE

Our systems provide maximum performance with 600,000 km of cable installed in 100+ countries since 1972.

Proven to perform in the world's most remote and harshest environments

Advanced control & monitoring

Wide temperature ranges from -200°C to +1000°C

RELIABLE Performance & Lower Cost of Ownership



Contents

| HEATING CABLES | | | 6 |
|--|-------------------|-----------------------------|----------|
| Self-regulating heating cables | | | |
| Up to 85°C | | BSA | 6 |
| Up to 85°C | | | |
| Up to 110°C | (Ex∕ | OTVR | 12 |
| Up to 250°C (Discontinued product) | €x> | XTV | 15 |
| Up to 250°C | Œx∕ | XTVR | 18 |
| Up to 250°C (Discontinued product) | Œx> | KTV | 21 |
| Up to 260°C | ⟨Ex⟩ | HTV | 24 |
| Power limiting heating cables | | | |
| Up to 260°C | Œx∕ | VPL | 28 |
| • | ······· | VI = | 20 |
| Constant wattage parallel circuit heating cables | €\ | | |
| Up to 200°C | (<u>CX</u>) | FMT | 31 |
| Up to 260°C | (cx/ | FH1 | 31 |
| Polymer insulated (PI) series heating cables | | | |
| PI-series heating cable PE outer jacket | | XPI-F | 34 |
| PI-series heating cable PTFE outer jacket (4J) | <u>⟨£x</u> ⟩ | XPI | 36 |
| PI-series heating cable PTFE outer jacket (7J) | ⟨£x⟩ | XPI-S | 39 |
| Mineral insulated (MI) series heating cables | | | |
| MI copper sheathed heating cable | ⟨Ex⟩ | HCH/HCC | 42 |
| MI cupro-nickel sheathed heating cable | ⟨£x⟩ | HDF/HDC | 42 |
| MI stainless steel sheathed heating cable | √E _x > | HSU | 40 10 |
| MI inconel sheathed heating cable | √E _x > | HIO | 51 |
| MI Alloy 825 sheathed heating cable | √€x⟩ | Н ۸ v | 51 |
| MI heating systems nomenclature | (€x) | Munite construction | 54 |
| | | IVII UTIILS COTISTI UCTIOTI | 00 |
| Self-regulating heating systems | 6 | | |
| Arctic Step heating panel for winterization of walkways | ⟨Ex⟩ | RAS-xxx | 62 |
| COMPONENTS | | | 65 |
| Component overview of self-regulating and | | | |
| power-limiting heating cable system | | | 65 |
| Power connections | | | 00 |
| Single-entry power connection with junction box | (F _Y) | IDC 100 | 6.6 |
| Multiple entry power/tee connection with junction box | (E) | JBS-100 | |
| Multiple entry power/tee connection with junction box | <u>w</u> | JBIVI-100 | /U |
| Junction box for modular system | | | |
| Junction box for modular system | | | |
| Junction box for modular system | <i>[</i> | JB-NH4 | 79 |
| Multi purpose junction box | (<u>CX</u>) | JB-EX-20 and JB-EX-20-EP | 81 |
| Multi purpose junction box | (EX) | JB-EX-21 | 84 |
| Multi purpose junction box | (EX) | JB-EX-21/35MM2 | 87 |
| Small Integrated junction box for direct connection of PI heating cables \dots | (<u>CX</u>) | JBS-PI-EP | 90 |
| Large Integrated junction box for direct connection of PI heating cables | (<u>CX</u>) | JBM-PI-EP | |
| Multi purpose junction box | (EX) | JB-EX-40-EP | |
| Multi purpose junction box | (EX) | JB-EX-41-EP | 99 |
| Multi purpose junction box | | | |
| Junction box | | | |
| Marshalling box | (<u>Ex</u>) | JB-MB-25/16MM2 | 107 |
| Marshalling box | | | |
| Cold applied connection kit | (Ex) | C25-100 | 110 |
| Heat shrink connection kit | | | |
| Cold lead/splice connection and end seal kit | <i>E</i> | CSE05DR | 113 |
| Heat shrink connection kit | | | |
| Metal connection kit, cold applied | (£X) | C25-100-METAL | 117 |
| Metal connection kit, cold applied | (Ex) | C3/4-100-METAL | 117 |
| Cold applied conduit connection kit | (£x) | CCON25-100 | 119 |
| Low profile power connection, cold applied | (£x) | C-150-E | 121 |
| Cold applied low profile power connection for PI heating cables | (£x) | CS-150-UNI-PI | 124 |
| Cold applied connection and splice kit for PI heating cables | <u>⟨£x</u> ⟩ | CS-150-xx-PI | 127 |
| Heat-shrink connection or splice kit for PI heating cables | | CS20-2.5-PI-NH | 129 |
| Cold applied conduit connection kit for PI heating cables | ⟨£x⟩ | CCON20-100-PI | 131 |
| | | | |

Contents

Splices and tees

| Splices and tees | _ | | |
|---|----------------------|---|-----|
| Under insulation low profile splice, cold applied | Œχ | S-150 | 133 |
| Under insulation in-line splice kit, heat-shrink | ⟨ Εχ⟩ | S-20 / S-40 | 135 |
| Above insulation splice or tee connection kit, cold applied | ⟨£x⟩ | T-100 | 137 |
| Integrated splice box for direct splicing of PI heating cables | (Ex) | JB-SPLICE-PI-E | 140 |
| End seals and insulation entry kits | | | |
| Above insulation end seal, cold applied | Œx | F-100-F / F-100-L-F | 143 |
| Under insulation low profile end seal, cold applied | ⟨€x⟩ | F-150 | 146 |
| Cold applied end seal kit | ······ | F-02-ΔI | 148 |
| Under insulation end seal kits, heat-shrink | ⟨€x⟩ | F-20 / F-40 | 140 |
| Conduit for protection of heating cables | | | |
| Insulation entry kit for parallel heating cables | | | |
| Insulation entry kit for PI heating cables | | | |
| | | | |
| CONTROL & MONITORING | | | 156 |
| Thermostats | _ | | |
| Surface sensing, mechanical | (Ex) | RAYSTAT-EX-02 | 156 |
| Ambient and surface sensing, electronic | ⟨Ex⟩ | ETS-05 | 159 |
| Surface sensing, electronic | | | |
| Ambient and surface sensing, electronic | | | |
| Surface sensing, mechanical | | | |
| Surface sensing, mechanical with limiter | | | |
| Surface sensing, mechanical controller & limiter | ⟨Ex⟩ | T-M-20-S/+X+Y/FX | 177 |
| Field mounted single-circuit electronic controllers | | | |
| Field mounted single-circuit electronic controllers Field mounted electronic controller for Zone 1 | (E) | Flores + F010: Flores + F010: IM | 101 |
| Field mounted electronic controller for Zone 1 | (E) | Elexant 50 IUI and Elexant 50 IUI-LIIVI . | 181 |
| | | Elexant 40 ful | 185 |
| Panel mounted electronic controllers | | | |
| Panel mounted electronic controller | (Ex) | Elexant 4020i | 191 |
| Multi-circuit panel mounted control and monitoring system | ⟨Ex⟩ | NGC-30 | 197 |
| Advanced multi-circuit panel mounted control and monitoring system | | | |
| Single-circuit electronic temperature controller | | TCONTROL-05 | 209 |
| Surface sensing, electronic controller | | Elexant 450C | 212 |
| Electronic controller components | | | |
| Remote monitoring module for digital inputs | ⟨Ex⟩ | RMM2-DI | 216 |
| Remote monitoring module for temperature inputs | ⟨€x⟩ | RMM3 | 210 |
| Remote modules for control (RMC) | | | |
| Configuration and Monitoring Assistant | ⟨€x⟩ | TAR-FY 03 | 227 |
| Heat-tracing controller, configuration and monitoring software | | | |
| | | Supervisor | 229 |
| Sensors | | | |
| Temperature sensor for non-hazardous area | | | |
| Temperature sensor for hazardous areas | (<u>Ex</u>) | MONI-PT100-EXE | 235 |
| Temperature sensor without enclosure | (Ex) | MONI-PT100-EXE-SENSOR | 237 |
| Ambient sensing temperature sensor for hazardous area (PT100) | (<u>Ex</u>) | MONI-PT100-EXE-AMB | 239 |
| Temperature sensor with transmitter 4/20 mA | ⟨Ex⟩ | MONI-PT100-4/20MA | 240 |
| Temperature sensor with M16 gland | | MONI-PT100-260/2 | 242 |
| PANELS & COMMUNICATION | | | 244 |
| | | | |
| Control, Monitoring and Power Distribution panelsZone 2 panels hazardous areas | Œχ | ATEX/IECEx Zone 2 Panels | 251 |
| Elexant 9200i wireless communication interface | (ξx) | Flevant 9200i | 260 |
| RS485 Communication cables | | | |
| | | | |
| ACCESSORIES | | | 207 |
| Support brackets, labels, pipe straps, spacer, fixing tapes, glands, adaptors and more | | Accessories | 267 |
| Handheld cable fault locator | | | |
| Self-regulating heating cable stripping tool | | | |
| Toolbox for electrical connection system for PI heating cables | | | |
| Toolbox for electrical conflection system for Prineating cables | | FITTUULGETTXX | 2/9 |

Product/Technology - Selection table

| lax c | ontinu | ous exp | osure, | or max | contir | iuous o | perating | g tempe | erature | (°C) | | | |
|-------|--------|---------|--------|--------|--------|---------|----------|---------|---------|------|-----|---------------------|--|
| O | 100 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 550 | 600 | Product | Technology |
| 6 | 5 | | | | | | | | | | | BTV | Parallel self-regulating Field-terminated |
| | 110 | | | | | | | | | | | QTVR | Parallel self-regulating Field-terminated |
| | | 150 | | | | | | | | | | XTVR | Parallel self-regulating Field-terminated |
| | | | 20 | 5 | | | | | | | | HTV | Parallel self-regulating Field-terminated |
| | | | | 260 | 0 | | | | | | | VPL | Parallel power-limiting Field-terminated |
| | | | 200 | | | | | | | | | FMT | Parallel Constant Wattage Zone Field-terminated |
| | | | | 260 | 0 | | | | | | | FHT | Parallel Constant Wattage Zone Field-terminated |
| | 90 | | | | | | | | | | | XPI-F | Polymer Insulated (PI) Series Constant Wattage, Field-terminated |
| | | | | 260 | 0 | | | | | | | XPI | Polymer Insulated (PI) Series Constant Wattage, Field-terminated |
| | | | | 260 | 0 | | | | | | | XPI-S | Polymer Insulated (PI) Series Constant Wattage, Field-terminated |
| | 80 | | | | | | | | | | | HCHR/HCCR (LSZH) | Mineral Insulated (MI) Series Constant Wattage, Factory-terminated |
| | | | 200 | | | | | | | | | HCH/HCC | Mineral Insulated (MI) Series Constant Wattage, Factory-terminated |
| | | | | | | | 400 | | | | | HDF/HDC | Mineral Insulated (MI) Series Constant Wattage, Factory-terminated |
| | | | | | | | | | | | 600 | HSQ | Mineral Insulated (MI) Series Constant Wattage, Factory-terminated |
| | | | | | | | | | | 550 | | НАх | Mineral Insulated (MI) Series Constant Wattage, Factory-terminated |
| | | | | | | | | | | | 600 | HIQ | Mineral Insulated (MI) Series Constant Wattage, Factory-terminated |
| | | | | 250 | | | | | | | | STS/STS-HV | Skin effect Tracing System (STS) Engineered Product |

For exact data per cable type, go to datasheet.

| | Temperature classification | | Preferred co | ntrol method | | | |
|--|---|--|--------------|-----------------|--------------------------------------|---------------------------------------|-------------------------------------|
| Max. intermittent exposure temperature (°C) ♦Continuous power off | T-class unconditional (product approach) | T-class per design (system approach) | No control | Ambient sensing | Broad temperature range (+/-10°C) | Tight temperature control (+/-3°C) | Typical pipe length range (m) |
| 85 | Т6 | _ | | | | | 0 - 400 |
| 110 | T4 | T5-T6 | | | | | 0 - 400 |
| 250 | Т3 | T4-T6 | | | | | 0 - 400 |
| 260 | T2/T3 | T3-T6 | | | | | 0 - 400 |
| 260♦ | - | T1-T6 | | | | | 0 - 600 |
| 200♦ | - | T2-T6 | | | | | 0 - 400 |
| 260♦ | - | T2-T6 | | | | | 0 - 600 |
| 100♦ | - | T2-T6 | | | | | Up to 3000 |
| 300♦ | - | T2-T6 | | | | | Up to 5000 |
| 300♦ | - | T2-T6 | | | | | Up to 5000 |
| 80♦ | - | T2-T6 | | | | | Up to 5000 |
| 200♦ | - | T2-T6 | | | | | Up to 5000 |
| 400♦ | - | T1-T6 | | | | | Up to 2500 |
| 700♦ | - | T1-T6 | | | | | Up to 500 |
| 700♦ | - | T1-T6 | | | | | Up to 5000 |
| 1000♦ | - | T1-T6 | | | | | Up to 500 |
| 250♦ | _ | T2-T6 | | | | | Up to 50,000 |

RAYCHEM-SB-EU1459-IHSCatalogTOC-EN-2401 nVent.com/RAYCHEM | 5










Self-Regulating Heating Cable

PRODUCT OVERVIEW

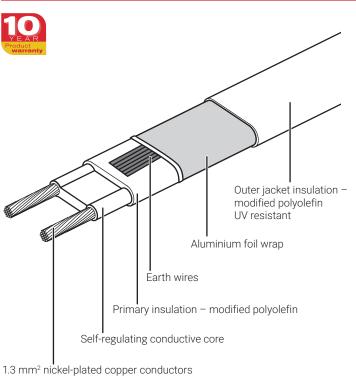

The nVent RAYCHEM BSA self-regulating heating cable is designed for industrial pipe freeze protection without steam cleaning and moderate process temperature requirements. It can be used for indoor and outdoor installation in ordinary (non-hazardous) area applications.

The foil wrap/drain-wire construction provides a highly flexible cable, that is easy to install around complex or small pipe networks.

Application

Traced surface type

Carbon steel
Stainless steel
Painted or unpainted metal
Plastic

Chemical resistance

Mild inorganic solutions

Supply voltage

230 Vac

PRODUCT SPECIFICATIONS

Product dimensions (nominal) and weight

| | 3BSA2-DR | 7BSA2-DR | |
|----------------|----------|----------|--|
| Thickness (mm) | 5.7 | 5.7 | |
| Width (mm) | 13.0 | 13.0 | |
| Weight (g/m) | 100 | 100 | |

Heating Cables

Technical details

Maximum maintain or continuous exposure 65°C temperature (power on/off)

Maximum intermittent exposure 85°C

temperature (power on/off) Maximum cumulative exposure 1000 hours


Minimum installation temperature -60°C

Minimum bend radius at 20°C: 10 mm at -60°C: 35 mm

Thermal output rating

Nominal power output at 230 Vac on insulated steel pipes

7BSA2-DR 3BSA2-DR

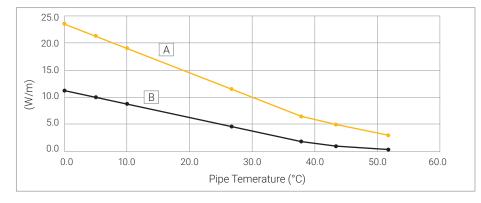

| | 3BSA2-DR | 7BSA2-DR |
|------------------------------------|----------|----------|
| Nominal power output (W/m at 10°C) | 9W/m | 19W/m |

Maximum circuit length based on Type 'C' circuit breakers according to EN 60898

| Electrical protection sizing | Start-up temperature | Maximum heating cable length per circuit (m) | | | |
|------------------------------|-------------------------|--|-----|--|--|
| 16 A | -20°C | 126 | 70 | | |
| | +10°C | 150 | 120 | | |
| 20 A | -20°C | 150 | 87 | | |
| | +10°C | 150 | 120 | | |
| 25 A | -20°C | 150 | 109 | | |
| | +10°C | 150 | 120 | | |

The above numbers are for circuit length estimation only. For more detailed information please use nVent RAYCHEM TraceCalc software or contact your local nVent representative. nVent requires the use of a 30 mA residual current device to provide maximum safety and protection from fire. Where design results in higher leakage current, the preferred trip level for adjustable devices is 30 mA above any inherent capacitive leakage characteristic of the heater as specified by the trace heater supplier or alternatively, the next common available trip level for non adjustable devices, with a maximum of 300 mA. All safety aspects need to be proven.

APPROVALS

For use in ordinary area.

Product certification







More details about product certification, approvals and conditions of safe use are available in the installation manual for Self-regulating and Power limiting heating cable systems at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

| Part description | 3BSA2-DR | 7BSA2-DR |
|------------------|------------|------------|
| Part No. | P000002271 | P000002272 |









Components

nVent offers a full range of components for power connections, splices and end seals. As a minimum a connection kit and end seal must be used from the below list to ensure proper functioning of the product and compliance with electrical requirements.

| Name | Part number | Description |
|-------------|-------------|--|
| JB-82 | 535679-000 | Junction box , polycarbonate, 4 entries, non-hazardous |
| JB-NH2 | 1244-020910 | Junction box , engineered polymer, 2 entries, non-hazardous |
| JB-NH4 | 1244-020911 | Junction box , engineered polymer, 4 entries, non-hazardous |
| SB-110 | 707366-000 | Support bracket (other brackets possible SB-100, SB-101, SB-130) |
| C25-01 | 1244-020909 | Hot applied connection kit to the Junction Box, non hazardous |
| IEK-25-04 | 332523-000 | Insulation entry kit |
| IEK-25-pipe | 1244-001050 | Insulation entry kit for pipe mounting |
| E-02-AL | 1244-020913 | Cold applied end seal kit, non hazardous |
| CSE-05-DR | 1244-021440 | Cold lead/splice connection and end seal kit, non hazardous |



Self-regulating Heating Cable ⟨€x⟩

PRODUCT OVERVIEW



Electrical heat-tracing for frost protection without steam cleaning.

The nVent RAYCHEM BTV-family of self-regulating, parallel circuit heating cables is used for frost protection of pipes and vessels. It can also be used for process temperature maintenance up to 65°C.



Heating Cables







Application

| Traced surface type | Carbon steel Stainless steel Plastic Painted or unpainted metal |
|---------------------|--|
| Chemical resistance | For organic corrosives: use -CT (fluoropolymer outer jacket) For mild inorganic solutions: use -CR (modified polyolefin outer jacket) For aggressive organics and corrosives consult your local nVent representative |

Supply voltage

230 Vac (Contact your local nVent representative for data on other voltages)

PRODUCT SPECIFICATIONS

Product dimensions and weight

| | 3BTV2-CR 3BTV2-CT | | 8BTV-2-CR 8BTV-2-CT | 10BTV2-CR 10BTV2-CT |
|--------------------------------|----------------------|--|------------------------|------------------------|
| Width x Thickness (nominal) mm | 10.5 x 5.5 | | 13.2 x 5.5 | |
| Weight (g/m) | 110 | | 150 | |







65°C

Maximum intermittent exposure temperature (power on/off)

Maximum maintain or continuous

85°C

Maximum cumulative exposure 1000 hours

Minimum installation temperature

-60°C

Minimum bend radius


 $-60^{\circ}\text{C} \le \text{T} < -20^{\circ}\text{C}$: 35 mm $-20^{\circ}\text{C} \le \text{T} < -10^{\circ}\text{C}$: 30 mm

-20°C ≤ I<-10°C: 30 mm -10°C ≤ T< 0°C: 25 mm 0°C ≤ T<+10°C: 20 mm T≥+10°C: 12 mm

Thermal output rating

Nominal power output at 230 Vac on insulated steel pipes

A 10BTV2-CT 10BTV2-CR B 8BTV-2-CT 8BTV-2-CR C 5BTV2-CT 5BTV2-CR D 3BTV2-CT 3BTV2-CR



| | 3BTV2-CR | 5BTV2-CR | 8BTV-2-CR | 10BTV2-CR |
|------------------------------------|----------|----------|-----------|-----------|
| | 3BTV2-CT | 5BTV2-CT | 8BTV-2-CT | 10BTV2-CT |
| Nominal power output (W/m at 10°C) | 9 | 16 | 25 | 29 |

Maximum circuit length based on type 'C' circuit breakers according to EN 60898

| Electrical protection sizing | Start-up temperature | Maximum heating cable length per circuit (m) | | | | | |
|------------------------------|----------------------|--|-----|-----|-----|--|--|
| 16 A | -20°C | 155 | 110 | 70 | 45 | | |
| | +10°C | 200 | 160 | 110 | 65 | | |
| 20 A | -20°C | 195 | 140 | 90 | 55 | | |
| | +10°C | 200 | 160 | 125 | 85 | | |
| 25 A | -20°C | 200 | 160 | 110 | 70 | | |
| | +10°C | 200 | 160 | 125 | 105 | | |
| 32 A | -20°C | 200 | 160 | 125 | 90 | | |
| | +10°C | 200 | 160 | 125 | 110 | | |

The above numbers are for circuit length estimation only. For more detailed information please use the nVent RAYCHEM TraceCalc software or Contact your local nVent representative. nVent requires the use of a 30 mA residual current device to provide maximum safety and protection from fire. Where design results in higher leakage current, the preferred trip level for adjustable devices is 30 mA above any inherent capacitive leakage characteristic of the heater as specified by the trace heater supplier or alternatively, the next common available trip level for non adjustable devices, with a maximum of 300 mA. All safety aspects need to be proven.

APPROVALS

For use ordinary area and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust).

Temperature classification

T6

Product certification















More details about product certification, approvals and conditions of safe use are available in the installation manual for Self-regulating and Power limiting heating cable systems at www.nVent.com/RAYCHEM

ORDERING INFORMATION

| Part description | 3BTV2-CR | 5BTV2-CR | 8BTV-2-CR | 10BTV2-CR |
|------------------|------------|------------|------------|------------|
| Part No. (*) | 914279-000 | 414809-000 | 479821-000 | 677245-000 |
| Part description | 3BTV2-CT | 5BTV2-CT | 8BTV-2-CT | 10BTV2-CT |
| Part No. (*) | 469145-000 | 487509-000 | 008633-000 | 567513-000 |

Components

nVent offers a full range of components for power connections, splices and end seals. These components must be used to ensure proper functioning of the product and compliance with electrical requirements.

(*) Localized versions may exist with limited approvals and different part numbers. Contact your local sales representative














Self-regulating heating cable (Ex)

PRODUCT OVERVIEW

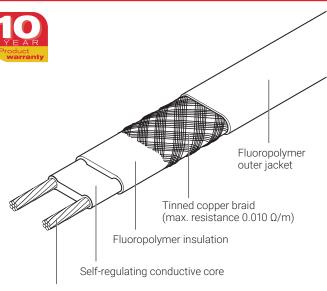

Electrical heat-tracing for process temperature maintenance applications up to 110°C which are not subject to steam cleaning.

The nVent RAYCHEM QTVR family of self-regulating, parallel circuit heating cables is used for process temperature maintenance of pipes and vessels.

It can also be used for frost protection of large pipes and for applications requiring medium temperature exposure capability.

1.4 mm² nickel plated copper conductors (10 and 15QTVR2-CT) 2.3 mm² nickel plated copper conductors (20QTVR2-CT)

Application

| Traced surface type | Carbon steel Stainless steel Painted or unpainted metal |
|---------------------|--|
| Chemical resistance | Organics and corrosives For aggressive organics and corrosives consult your local nVent representative |

Supply voltage

230 Vac (Contact your local nVent representative for data on other voltages)







Product dimensions and weight

| | 10QTVR2-CT | 15QTVR2-CT | 20QTVR2-CT |
|--------------------------------|------------|------------|------------|
| Width x Thickness (nominal) mm | 11.8 x 4.5 | | 14.0 x 5.1 |
| Weight (g/m) | 126 | | 180 |


Technical details

Maximum maintain or continuous 110°C exposure temperature (power on/off) 110°C Maximum intermittent exposure temperature (power on/off) Minimum installation temperature -60°C Minimum bend radius $-60^{\circ}\text{C} \le T < -20^{\circ}\text{C}: 35 \text{ mm}$ -20°C ≤ T<-10°C: 30 mm -10°C ≤ T< 0°C: 25 mm 0°C ≤ T <+10°C: 20 mm T≥ +10°C: 12 mm

Thermal output rating

Nominal power output at 230 Vac on insulated steel pipes

A 20QTVR2-CT B 15QTVR2-CT C 10QTVR2-CT



| | 10QTVR2-CT | 15QTVR2-CT | 20QTVR2-CT |
|------------------------------------|------------|------------|------------|
| Nominal power output (W/m at 10°C) | 38 | 51 | 64 |

Maximum circuit length based on type 'C' circuit breakers according to EN 60898

| Electrical protection sizing | Start-up temperature | Maximum heating cable length per circuit (m) | | | | |
|------------------------------|-------------------------|--|-----|-----|--|--|
| 16 A | -20°C | 65 | 63 | 47 | | |
| | +10°C | 80 | 63 | 47 | | |
| 25 A | -20°C | 95 | 75 | 60 | | |
| | +10°C | 115 | 95 | 75 | | |
| 32 A | -20°C | 115 | 100 | 75 | | |
| | +10°C | 115 | 100 | 95 | | |
| 40 A | -20°C | 115 | 100 | 95 | | |
| | +10°C | 115 | 100 | 115 | | |

The above numbers are for circuit length estimation only. For more detailed information please use the nVent RAYCHEM TraceCalc software or contact your local nVent representative.

nVent requires the use of a 30 mA residual current device to provide maximum safety and protection from fire.

Where design results in higher leakage current, the preferred trip level for adjustable devices is 30 mA above any inherent capacitive leakage characteristic of the heater as specified by the trace heater supplier or alternatively, the next common available trip level for non adjustable devices, with a maximum of 300 mA. All safety aspects need to be proven.

Heating Cables













Temperature classification T4 (unconditional)

T6...T5 Possible using stabilized design

Product certification















More details about product certification, approvals and conditions of safe use are available in the installation manual for Self-regulating and Power limiting heating cable systems at www.nVent.com/RAYCHEM

ORDERING INFORMATION

| Part description | 10QTVR2-CT | 15QTVR2-CT | 20QTVR2-CT |
|------------------|------------|------------|------------|
| Part No. | 391991-000 | 040615-000 | 988967-000 |

Components

nVent offers a full range of components for power connections, splices and end seals.

These components must be used to ensure proper functioning of the product and compliance with electrical requirements.










Self-regulating heating cable ⟨€x⟩

PRODUCT OVERVIEW

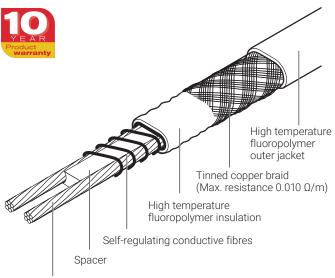

Electrical heat-tracing for process temperature maintenance applications up to 121°C which may be subject to steam cleaning.

The nVent RAYCHEM XTV family of self-regulating, parallel circuit heating cables is used for process temperature maintenance of pipes and vessels.

It can also be used for frost protection of large pipes and for applications requiring high temperature exposure capability.

Heating Cables







2.3 mm² nickel plated copper conductors

Application

| Traced surface type | Carbon steel Stainless steel Painted or unpainted metal |
|---------------------|--|
| Chemical resistance | Organics and corrosives For aggressive organics and corrosives consult your local nVent representative |







| ` , | |
|--|--|
| Width x Thickness (nominal) mm | 10.8 x 7.2 |
| Technical details | |
| Maximum maintain or continuous exposure temperature (power on) | 121°C |
| Maximum intermittent exposure temperature (power on/off) | 250°C (*) Maximum cumulative exposure 1000 hours |

Minimum installation temperature −60°C

Minimum bend radius −60°C ≤ T<-20°C: 51 mm


-20°C ≤ T<-10°C: 35 mm -10°C ≤ T< 0°C: 25 mm 0°C ≤ T <+10°C: 20 mm T≥ +10°C: 12 mm

Thermal output rating

Nominal power output at 230 Vac on insulated steel pipes

B 15XTV2-CT-T3 C 12XTV2-CT-T3 D 8XTV2-CT-T3 E 4XTV2-CT-T3

A 20XTV2-CT-T2

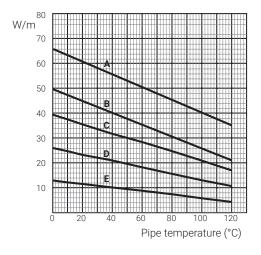

(*) The 250°C rating applies to all products printed "MAX INTERMITTENT EXPOSURE 250°C

| | 4XTV2-CT-T3 | 8XTV2-CT-T3 | 12XTV2-CT-T3 | 15XTV2-CT-T3 | 20XTV2-CT-T2 |
|------------------------------------|-------------|-------------|--------------|--------------|--------------|
| Nominal power output (W/m at 10°C) | 12 | 25 | 38 | 47 | 63 |

Maximum circuit length based on type 'C' circuit breakers according to EN 60898

| Electrical protection sizing | Start-up temperature | Maximum heating cable length per circuit (m) | | | | | |
|------------------------------|-------------------------|--|-----|-----|-----|-----|--|
| 16 A | -20°C | 145 | 90 | 65 | 55 | 40 | |
| | +10°C | 170 | 105 | 75 | 60 | 45 | |
| 25 A | -20°C | 225 | 145 | 105 | 85 | 65 | |
| | +10°C | 245 | 165 | 120 | 95 | 70 | |
| 32 A | -20°C | 245 | 175 | 135 | 105 | 80 | |
| | +10°C | 245 | 175 | 140 | 125 | 90 | |
| 40 A | -20°C | 245 | 175 | 140 | 135 | 110 | |
| | +10°C | 245 | 175 | 140 | 135 | 110 | |

The above numbers are for circuit length estimation only. For more detailed information please use the nVent TraceCalc software or Contact your local nVent representative. nVent requires the use of a 30 mA residual current device to provide maximum safety and protection from fire. Where design results in higher leakage current, the preferred trip level for adjustable devices is 30 mA above any inherent capacitive leakage characteristic of the heater as specified by the trace heater supplier or alternatively, the next common available trip level for non adjustable devices, with a maximum of 300 mA. All safety aspects need to be proven.

Heating Cables

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification:

T3: unconditional (except 20XTV2-CT: T2)

T6 ...T4 using stabilized design (except 20-XTV2-CT: T6 ... T3 using stabilized design)

nVent RAYCHEM heat-tracing products are approved for the listed temperature classifications by using the principles of stabilized design (as per system classification approach). Use TraceCalc design software or contact nVent.

Product certification















More details about product certification, approvals and conditions of safe use are available in the installation manual for Self-regulating and Power limiting heating cable systems at www.nVent.com/RAYCHEM

ORDERING INFORMATION

| Part description | 4XTV2-CT-T3 | 8XTV2-CT-T3 | 12XTV2-CT-T3 | 15XTV2-CT-T3 | 20XTV2-CT-T2 |
|------------------|-------------|-------------|--------------|--------------|--------------|
| Part No. (**) | P000001667 | P000001670 | P000001673 | P000001675 | P000001677 |
| Weight (g/m) | 170 | 170 | 170 | 170 | 170 |

Components

nVent offers a full range of components for power connections, splices and end seals.

These components must be used to ensure proper functioning of the product and compliance with electrical requirements.

(**) Localized versions may exist with limited approvals and different part numbers. Contact your local sales representative.












Self-regulating heating cable (Ex)

PRODUCT OVERVIEW

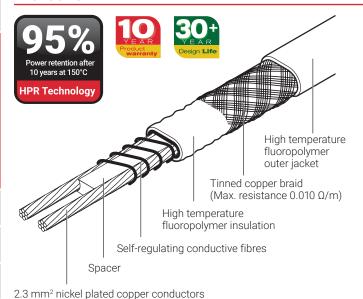

The nVent RAYCHEM XTVR self-regulating heating cable is designed for freeze protection or process temperature maintenance of pipes and vessels requiring high power output and exposure temperatures.

The XTVR heating cables can withstand temperatures up to 250°C and provide process temperature maintenance to 150°C (which may be subject to steam cleaning). The XTVR heating cable incorporates a high power retention (HPR) heating core. This innovative heating core technology and product design results in:

- · Highly reliable power output for long operational life
- Ease of stripping, flexible and installation
- Seven wattage levels (at 230 Vac) for efficient heat trace designs and lower installation costs

Power retention: Minimum 95% after 10 years at maximum operating temperature of 150°C.

Certified for use in hazardous and ordinary areas and comes with a 10 year product warranty.

Design life: 30+ years of design life, depending on application.

Application

| Traced surface type | Carbon steel Stainless steel |
|---------------------|--|
| | Painted or unpainted metal |
| Chemical resistance | Organics and corrosives For aggressive organics and corrosives consult your local nVent representative |

Supply Voltage

230 Vac (contact nVent for data on the other voltages 190 - 277 Vac)

PRODUCT SPECIFICATIONS

| Product | dimension | ns (mm) |
|----------------|--------------|-------------|
| riouuci | ullilelisioi | 15 (111111) |

| Width x Thickness (nominal) mm | 10.8 x 7.2 |
|--------------------------------|------------|
| Weight (nominal) | 164 g/m |

Heating Cables








Technical details

| Maximum continuous operating temperature (energized) | 150°C |
|--|--|
| Maximum intermittent exposure temperature (energized/de-energized) | 250°C Maximum cumulative exposure 2000 hours |
| Minimum installation temperature | -60°C |
| Minimum bend radius | $-60^{\circ}\text{C} \le \text{T} < -20^{\circ}\text{C}$: 51 mm $-20^{\circ}\text{C} \le \text{T} < -10^{\circ}\text{C}$: 35 mm $-10^{\circ}\text{C} \le \text{T} < 0^{\circ}\text{C}$: 25 mm $0^{\circ}\text{C} \le \text{T} < +10^{\circ}\text{C}$: 20 mm $\text{T} \ge +10^{\circ}\text{C}$: 12 mm |
| Design life | 30 years or more depending on appliation (contact nVent for more details) |
| Power retention | Minimum 95% after 10 years of maximum operating temperature of 150°C |

Thermal output rating

Nominal power output at 230 Vac on insulated steel pipes

| Part Description | "Nominal power output (W/m at 10°C)" | See chart |
|---------------------|--|--------------|
| 20XTVR2-CT | 64 | А |
| 15XTVR2-CT | 48 | В |
| 12XTVR2-CT | 38 | С |
| 10XTVR2-CT | 32 | D |
| 8XTVR2-CT | 25 | E |
| 5XTVR2-CT | 16 | F |
| 3XTVR2-CT | 9 | G |

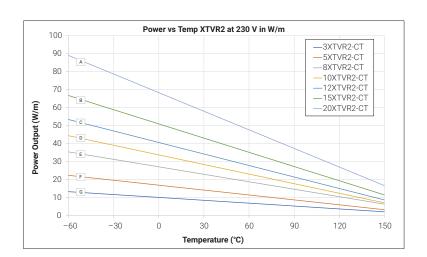

Maximum circuit length based on type 'C' circuit breakers according to EN 60898

| | | Electrical protection sizing / Maximum heating cable length per circuit (m) | | | | |
|------------|----------------|---|------|------|------|------|
| | Start-up Temp. | 16 A | 20 A | 25 A | 32 A | 40 A |
| 3XTVR2-CT | 10°C | 193 | 241 | 290 | 290 | 290 |
| | 0°C | 182 | 228 | 285 | 290 | 290 |
| | -20 | 165 | 206 | 258 | 290 | 290 |
| | -40 | 151 | 188 | 235 | 290 | 290 |
| 5XTVR2-CT | 10 | 144 | 180 | 221 | 221 | 221 |
| | 0 | 136 | 170 | 213 | 221 | 221 |
| | -20 | 123 | 154 | 192 | 221 | 221 |
| | -40 | 112 | 140 | 175 | 221 | 221 |
| 8XTVR2-CT | 10 | 104 | 130 | 162 | 171 | 171 |
| | 0 | 99 | 123 | 154 | 171 | 171 |
| | -20 | 89 | 112 | 140 | 171 | 171 |
| | -40 | 82 | 102 | 128 | 164 | 171 |
| 10XTVR2-CT | 10 | 89 | 111 | 139 | 151 | 151 |
| | 0 | 84 | 105 | 131 | 151 | 151 |
| | -20 | 76 | 95 | 119 | 151 | 151 |
| | -40 | 69 | 87 | 108 | 139 | 151 |
| 12XTVR2-CT | 10 | 77 | 96 | 120 | 135 | 135 |
| | 0 | 73 | 91 | 113 | 135 | 135 |
| | -20 | 66 | 82 | 103 | 131 | 135 |
| | -40 | 60 | 75 | 94 | 120 | 135 |









| | | Electrical protection sizing / Maximum heating cable length per circuit (m) | | | | |
|------------|----------------|---|------|------|------|------|
| | Start-up Temp. | 16 A | 20 A | 25 A | 32 A | 40 A |
| 15XTVR2-CT | 10 | 57 | 72 | 90 | 115 | 120 |
| | 0 | 54 | 68 | 85 | 109 | 120 |
| | -20 | 49 | 62 | 77 | 99 | 120 |
| | -40 | 45 | 56 | 70 | 90 | 113 |
| 20XTVR2-CT | 10 | 45 | 57 | 71 | 91 | 101 |
| | 0 | 43 | 54 | 67 | 86 | 96 |
| | -20 | 39 | 49 | 61 | 78 | 88 |
| | -40 | 36 | 45 | 56 | 72 | 83 |

The above numbers are for circuit length estimation only. For more detailed information please use the nVent TraceCalc software or Contact your local nVent representative. nVent requires the use of a 30 mA residual current device to provide maximum safety and protection from fire. Where design results in higher leakage current, the preferred trip level for adjustable devices is 30 mA above any inherent capacitive leakage characteristic of the heater as specified by the trace heater supplier or alternatively, the next common available trip level for non adjustable devices, with a maximum of 300 mA. All safety aspects need to be proven.

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

T3: unconditional (20XTVR2-CT up to Max 240 VAC)

T6 ...T4: nVent RAYCHEM XTVR is approved for the listed temperature classifications by using the principles of stabilized design or controlled limited design. Use TraceCalc design software or contact nVent.

Product certification









More details about product certification, approvals and conditions of safe use are available in the installation manual for Self-regulating and Power limiting heating cable systems at www.nVent.com/RAYCHEM

ORDERING INFORMATION

| Part No. | Description |
|------------|----------------|
| 2000003070 | XTV-3XTVR2-CT |
| 2000003072 | XTV-5XTVR2-CT |
| 2000003073 | XTV-8XTVR2-CT |
| 2000003075 | XTV-10XTVR2-CT |

| Part No. | Description |
|------------|----------------|
| 2000003076 | XTV-12XTVR2-CT |
| 2000003078 | XTV-15XTVR2-CT |
| 2000003080 | XTV-20XTVR2-CT |

Components

nVent offers a full range of components for power connections, splices and end seals.

These components must be used to ensure proper functioning of the product and compliance with electrical requirements.



Self-regulating heating cable (Ex)

PRODUCT OVERVIEW



Electrical heat-tracing for process temperature maintenance applications up to 150°C which may be subject to steam cleaning.

The nVent RAYCHEM KTV family of self-regulating, parallel circuit heating cables is used for process temperature maintenance of pipes and vessels.

It can also be used for frost protection of large pipes and for applications requiring high temperature exposure capability.



Heating Cables







Application

| Traced surface type | Carbon steel Stainless steel Painted or unpainted metal |
|---------------------|--|
| Chemical resistance | Organics and corrosives For aggressive organics and corrosives consult your local nVent representative |

Supply voltage

230 Vac (Contact your local nVent representative for data on other voltages)

PRODUCT SPECIFICATIONS

Product dimensions and weight

| Width x Thickness (nominal) mm | 14.0 x 7.6 |
|--------------------------------|------------|
| Weight (g/m) | 250 |

RAYCHEM-DS-EU1383-KTV-EN-2401 nVent.com/RAYCHEM | 21





Technical details

| Maximum maintain or continuous exposure temperature (power on) | 150°C |
|--|--|
| Maximum intermittent exposure temperature (power on/off) | 250°C (*) Maximum cumulative exposure 1000 hours (*) The 250°C rating applies to all products printed "MAX INTERMITTENT EXPOSURE 250°C". |
| Minimum installation temperature | -60°C |
| Minimum bend radius | -60° C ≤ T< -20° C: 26 mm -20° C ≤ T< -10° C: 20 mm -10° C ≤ T< 0°C: 15 mm 0° C ≤ T <+10°C: 15 mm T ≥ +10°C: 12 mm |


Thermal output rating

Nominal power output at 230 Vac on insulated steel pipes

20KTV2-CT **15KTV2-CT**

С 8KTV2-CT

5KTV2-CT

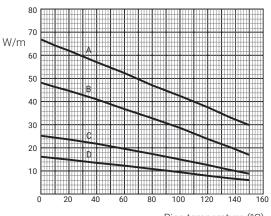

Pipe temperature (°C)

| | 5KTV2-CT | 8KTV2-CT | 15KTV2-CT | 20KTV2-CT |
|------------------------------------|----------|----------|-----------|-----------|
| Nominal power output (W/m at 10°C) | 16 | 25 | 47 | 66 |

Maximum circuit length based on type 'C' circuit breakers according to EN 60898

| Electrical Protection Sizing | Start-up Temperature | Maximum Heating Cable Length Per Circuit (m) | | | | | | |
|---------------------------------|----------------------|--|-----|-----|-----|--|--|--|
| 16 A | -20°C | 130 | 95 | 60 | 40 | | | |
| | +10°C | 145 | 105 | 65 | 45 | | | |
| 25 A | -20°C | 205 | 150 | 90 | 65 | | | |
| | +10°C | 230 | 165 | 100 | 75 | | | |
| 32 A | -20°C | 230 | 180 | 115 | 85 | | | |
| | +10°C | 230 | 180 | 130 | 95 | | | |
| 40 A | -20°C | 230 | 180 | 130 | 105 | | | |
| | +10°C | 230 | 180 | 130 | 110 | | | |

The above numbers are for circuit length estimation only. For more detailed information please use the nVent RAYCHEM TraceCalc software or contact your local nVent representative. nVent requires the use of a 30 mA residual current device to provide maximum safety and protection from fire.

Where design results in higher leakage current, the preferred trip level for adjustable devices is 30 mA above any inherent capacitive leakage characteristic of the heater as specified by the trace heater supplier or alternatively, the next common available trip level for non adjustable devices, with a maximum of 300 mA. All safety aspects need to be proven.

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

T2: 5KTV2-CT, 8KTV2-CT, 15KTV2-CT, 20KTV2-CT (unconditional)

T6...T3: 5KTV2-CT, 8KTV2-CT, 15KTV2-CT, 20KTV2-CT (using stabilized design)

nVent RAYCHEM heat-tracing products are approved for the listed temperature classifications by using the principles of stabilized design (as per system classification approach). Use TraceCalc design software or contact nVent.

Product certification













More details about product certification, approvals and conditions of safe use are available in the installation manual for Self-regulating and Power limiting heating cable systems at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

| Part description | 5KTV2-CT | 8KTV2-CT | 15KTV2-CT | 20KTV2-CT |
|------------------|------------|------------|------------|------------|
| Part No. | P000001679 | P000001681 | P000001683 | P000001685 |

Components

nVent RAYCHEM offers a full range of components for power connections, splices and end seals.

These components must be used to ensure proper functioning of the product and compliance with electrical requirements.



Self-regulating heating cable (Ex)

PRODUCT OVERVIEW



The nVent RAYCHEM HTV self-regulating heating cable is designed for freeze protection or process temperature maintenance of pipes and vessels with very high continuous operating temperatures (205°C).

Maximum exposure temperature is 260°C.

The HTV cable has a solid construction with a high power retention (HPR) heating core and pressure extruded electrical insulation. It is then integrated with a robust metallic braid and a chemically resistant fluoropolymer outer jacket.

The innovative heating core technology and design result in:

- · Superior thermal conductivity
- · Highly stable power output for long operational life
- · Ease of stripping, flexing and installation
- · Long circuit lengths for minimized total installation cost

Power retention: At least 95% after 10 years of simulated product life at maximum continuous operating temperature (205°C).

Certified for use in hazardous and ordinary areas and comes with a 10 year product warranty programme.

Design life: 30 years or more depending on application.

Application

Traced surface type Carbon steel Stainless steel Painted or unpainted metal Chemical resistance Organics aqueous inorganic chemicals and corrosives

Supply voltage

230 Vac (Contact nVent for data on other voltages 190-277 Vac)

Heating Cables






PRODUCT SPECIFICATIONS

| Product dimensions (mm) | |
|--|---|
| Heating cable dimensions | 10.9 x 7.1 mm |
| Weight (nominal) | 170 g/m |
| Technical details | |
| Maximum continuous operating temperature (energized) | 205°C |
| Maximum continuous exposure temperature (de-energized) | 205°C |
| Maximum intermittent exposure temperature (energized/de-energized) | 260°C Maximum cumulative exposure 2000 hours (*) (*) Longer periods allowed between 205-260°C. Contact nVent. |
| Minimum installation temperature | -60°C |
| Bus wire size | 2.3 mm ² |
| Minimum bend radius | 25 mm at -60°C ≤ T < -20°C 20 mm at -20°C ≤ T < -10°C 15 mm at -10°C ≤ T < +10°C 13 mm at T ≥ +10°C |
| Design life | 30 years or more depending on application |
| Power retention | At least 95% after 10 years of simulated product life at maximum continuous operating temperature (205°C). |

Thermal output rating

Nominal power output at 230 Vac on insulated steel pipes

| Part description | Nominal power output (W/m at 10°C) | See chart |
|------------------|--|-----------|
| 28HTV2-CT | 88 | А |
| 20HTV2-CT | 64 | В |
| 15HTV2-CT | 48 | С |
| 12HTV2-CT | 38 | D |
| 10HTV2-CT | 32 | E |
| 8HTV2-CT | 25 | F |
| 5HTV2-CT | 16 | G |
| 3HTV2-CT | 9 | Н |

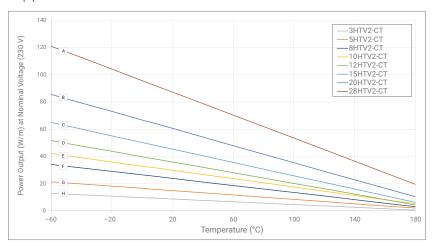













| | Electrical protection sizing / Maximum heating cable length per circuit (m) | | | | | | |
|--------------|---|------|------|------|------|------|--|
| | Start-up Temp. | 16 A | 20 A | 25 A | 32 A | 40 A | |
| | 10°C | 197 | 246 | 293 | 293 | 293 | |
| 01 17 /0 07 | 0°C | 189 | 237 | 293 | 293 | 293 | |
| 3HTV2-CT | -20°C | 168 | 210 | 262 | 293 | 293 | |
| | -40°C | 155 | 193 | 241 | 293 | 293 | |
| | 10°C | 146 | 183 | 224 | 224 | 224 | |
| FLITVO OT | 0°C | 138 | 172 | 215 | 224 | 224 | |
| 5HTV2-CT | -20°C | 126 | 158 | 197 | 224 | 224 | |
| | -40°C | 116 | 145 | 181 | 224 | 224 | |
| | 10°C | 106 | 132 | 165 | 173 | 173 | |
| 01.171.40.07 | 0°C | 100 | 125 | 157 | 173 | 173 | |
| 8HTV2-CT | -20°C | 92 | 115 | 143 | 173 | 173 | |
| | -40°C | 84 | 105 | 132 | 169 | 173 | |
| | 10°C | 90 | 112 | 140 | 152 | 152 | |
| 101171/0.07 | 0°C | 86 | 108 | 135 | 152 | 152 | |
| 10HTV2-CT | -20°C | 79 | 99 | 123 | 152 | 152 | |
| | -40°C | 72 | 91 | 113 | 145 | 152 | |
| | 10°C | 78 | 97 | 121 | 138 | 138 | |
| 101171/0.07 | 0°C | 74 | 93 | 116 | 138 | 138 | |
| 12HTV2-CT | -20°C | 67 | 84 | 105 | 134 | 138 | |
| | -40°C | 62 | 77 | 97 | 124 | 138 | |
| | 10°C | 61 | 76 | 95 | 119 | 119 | |
| 15UT) (0. OT | 0°C | 58 | 72 | 90 | 115 | 119 | |
| 15HTV2-CT | -20°C | 53 | 66 | 82 | 105 | 119 | |
| | -40°C | 48 | 60 | 75 | 96 | 113 | |
| | 10°C | 46 | 58 | 72 | 92 | 99 | |
| 001171/0.07 | 0°C | 44 | 55 | 69 | 88 | 95 | |
| 20HTV2-CT | -20°C | 40 | 50 | 63 | 81 | 88 | |
| | -40°C | 37 | 46 | 58 | 74 | 82 | |
| | 10°C | 27 | 35 | 47 | 67 | 68 | |
| 201 17.70 07 | 0°C | 27 | 34 | 45 | 65 | 65 | |
| 28HTV2-CT | -20°C | 25 | 32 | 42 | 59 | 60 | |
| | -40°C | 24 | 30 | 40 | 54 | 57 | |

The above numbers are for circuit length estimation only. The maximum circuit length is for one continuous length of cable, not the sum of segments of cable. For more detailed information please use the nVent TraceCalc design software or contact your local nVent representative. nVent requires the use of a 30 mA residual current device to provide maximum safety and protection from fire. Where design results in higher leakage current, the preferred trip level for adjustable devices is 30 mA above any inherent capacitive leakage characteristic of the heater as specified by the trace heater supplier or alternatively, the next common available trip level for non adjustable devices, with a maximum of 300 mA. All safety aspects need to be proven.

APPROVALS

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification:

T3: unconditional (T2: 20HTV2-CT, 28HTV2-CT)

T6...T4 (T3 20HTV2-CT, 28HTV2-CT) using stabilized design

nVent RAYCHEM heat-tracing products are approved for the listed temperature classifications by using the principles of stabilized design. Use TraceCalc design software or contact nVent.

Product certification:













More details about product certification, approvals and conditions of safe use are available in the installation manual for Self-regulating and Power limiting heating cable systems at www.nVent.com/RAYCHEM.

^{*} pending for 28HTV2-CT

Heating Cables

ORDERING INFORMATION

| Part description | Part number |
|------------------|-------------|
| 3HTV2-CT | P000004319 |
| 5HTV2-CT | P000004320 |
| 8HTV2-CT | P000004321 |
| 10HTV2-CT | P000004322 |
| 12HTV2-CT | P000004323 |
| 15HTV2-CT | P000004324 |
| 20HTV2-CT | P000004325 |
| 28HTV2-CT | 2000003152 |

Components

nVent offers a full range of components for power connections, splices and end seals.

These components must be used to ensure proper functioning of the product and compliance with electrical requirements.












High-temperature power-limiting heating cable (Ex)

PRODUCT OVERVIEW

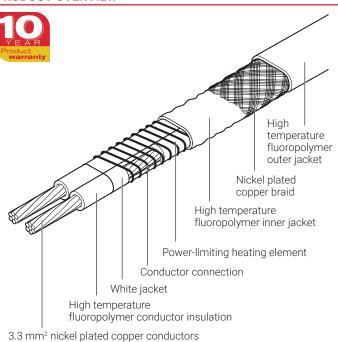

nVent RAYCHEM VPL is a family of power limiting heating cables designed for pipe and equipment heat-tracing in industrial applications.

VPL can be used for frost protection and process temperature maintenance requiring high power output and/or high temperature exposure. VPL can provide process temperature maintenance up to 235°C (depending on cable type) and can withstand routine steam purges and temperature exposure to 260°C with power off.

Power-limiting cables are parallel heaters formed by a coiled resistor alloy heating element wrapped around two parallel conductors. The distance between conductor contact points forms the heating zone length. This parallel construction allows it to be cut-to-length and terminated on-site. The power output of VPL heating cables decreases with increasing temperature. VPL heating cables can be overlapped once. The relatively flat power temperature curve of VPL ensures a low start-up current and high output at elevated temperatures. VPL cables are approved for use in hazardous areas. Approvals are listed below.

Application

| Traced surface type | Carbon steel Stainless steel Painted or unpainted metal |
|---------------------|--|
| Chemical resistance | Organics and corrosives For aggressive organics and corrosives consult your local nVent representative |

Supply voltage

VPL2: 208-277 Vac VPL4: 400-480 Vac

PRODUCT SPECIFICATIONS

Dimensions (mm)

| | 5VPLx-CT | 10VPLx-CT | 15VPLx-CT | 20VPLx-CT |
|--------------------|----------|-----------|-----------|-----------|
| Thickness (mm) | 8.2 | 8.2 | 8.2 | 8.2 |
| Width (nominal) mm | 11.6 | 11.6 | 11.6 | 11.6 |

Heating Cables







Technical details

| | Cable | 208 V | 230 V | 254 V | 277 V | 400 V | 480 V |
|---|---|-------|------------------------------|-------|-------|-------|-------|
| Maximum maintain or continuous | 5VPL2-CT | 235°C | 230°C | 225°C | 225°C | _ | _ |
| exposure temperature (power on) | 10VPL2-CT | 220°C | 210°C | 200°C | 195°C | _ | _ |
| | 15VPL2-CT | 200°C | 180°C | 145°C | 105°C | _ | _ |
| | 20VPL2-CT | 150°C | 150°C | _ | _ | _ | _ |
| | 5VPL4-CT | _ | _ | _ | _ | 230°C | 230°C |
| | 10VPL4-CT | _ | _ | _ | _ | 215°C | 205°C |
| | 15VPL4-CT | _ | _ | _ | _ | 195°C | 160°C |
| | 20VPL4-CT | - | - | - | _ | 150°C | 150°C |
| Maximum continuous exposure temperature (power off) | 260°C | | | | | | |
| Temperature classification T* | | | he principles Calc design | | | | |
| Minimum installation temperature | -60°C | | | | | | |
| Minimum bend radius | -60°C ≤ T<-20°C: 19 mm -20°C ≤ T<+10°C: 15 mm T≥ +10°C: 12 mm | | | | | | |
| Minimum clearance | 15 mm | | | | | | |


| | 5VPLx-CT | 10VPLx-CT | 15VPLx-CT | 20VPLx-CT |
|-------------------------|------------|------------|------------|------------|
| Nominal cold lead/ | 1.2 (VPL2) | 0.9 (VPL2) | 0.6 (VPL2) | 0.5 (VPL2) |
| heating zone length (m) | 2.4 (VPL4) | 1.7 (VPL4) | 1.3 (VPL4) | 1.1 (VPL4) |

Thermal output rating

Nominal power output rating on insulated steel pipes at 240 V and 480 V (power output of VPL4 at 400 V will be lower)

To choose the correct heating cable for your application use the TraceCalc design software.

A 20VPL-CT B 15VPL-CT C 10VPL-CT D 5VPL-CT

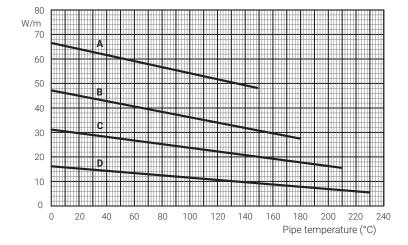

| Nominal power output (W/m at 10°C) | 5VPLx-CT | 10VPLx-CT | 15VPLx-CT | 20VPLx-CT |
|------------------------------------|----------|-----------|-----------|-----------|
| VPL2 at 230 V | 15 | 30 | 45 | 61 |
| VPL2 at 240 V/VPL4 at 480 V | 16 | 33 | 49 | 65 |
| VPL4 at 400 V | 12 | 24 | 36 | 49 |

Adjustment factors

| | | 5VPL2-CT | 10VPL2-CT | 15VPL2-CT | 20VPL2-CT |
|-------|----------------|----------|-----------|-----------|-------------|
| 254 V | Power output | 1.2 | 1.19 | 1.19 | Not allowed |
| | Circuit length | 1.05 | 1.04 | 1.04 | Not allowed |
| 277 V | Power output | 1.3 | 1.28 | 1.26 | Not allowed |
| | Circuit length | 1.13 | 1.11 | 1.09 | Not allowed |
| 400 V | Power output | 0.72 | 0.73 | 0.74 | 0.75 |
| | Circuit length | 0.86 | 0.87 | 0.89 | 0.9 |













Maximum circuit length based on type 'C' circuit breakers according to EN 60898

| VPL2 at 230 V | | 5VPL2-CT | 10VPL2-CT | 15VPL2-CT | 20VPL2-CT |
|------------------------------|----------------------|----------------------|--------------------------|-----------|-----------|
| Electrical protection sizing | Start-up temperature | Maximum heating cabl | e length per circuit (m) | | |
| 16 A | -20°C | 195 | 100 | 70 | 50 |
| | +10°C | 215 | 110 | 75 | 55 |
| 25 A | -20°C | 220* | 155* | 105 | 80 |
| | +10°C | 220* | 155* | 115 | 85 |
| 32 A | -20°C | 220* | 155* | 130* | 100 |
| | +10°C | 220* | 155* | 130* | 110* |
| 40 A | -20°C | 220* | 155* | 130* | 110* |
| | +10°C | 220* | 155* | 130* | 110* |

| VPL4 at 480 V and 400 V | | 5VPL4-CT | 10VPL4-CT | 15VPL4-CT | 20VPL4-CT |
|------------------------------|----------------------|----------------------|----------------------------|--------------------------|------------|
| Electrical protection sizing | Start-up temperature | Maximum heating cabl | e length per circuit (m) a | t 480 Vac and (at 400 Va | ıc) |
| 16 A | -20°C | 390 (335) | 195 (170) | 130 (115) | 100 (90) |
| | +10°C | 425 (365) | 210 (185) | 140 (125) | 105 (95) |
| 25 A | -20°C | 450* (450) | 310 (265) | 205 (185) | 155 (140) |
| | +10°C | 450* (450) | 320* (290) | 220 (195) | 165 (150) |
| 32 A | -20°C | 450* (450) | 320* (320) | 260* (235) | 200 (180) |
| | +10°C | 450* (450) | 320* (320) | 260* (250) | 210 (190) |
| 40 A | -20°C | 450* (450) | 320* (320) | 260* (260) | 225* (225) |
| | +10°C | 450* (450) | 320* (320) | 260* (260) | 225* (225) |

^{*}The maximum heating cable length must not exceed these values, even when voltage adjustment factors are used.

The above numbers are for circuit length estimation only. For more detailed information please use the nVent RAYCHEM TraceCalc software or contact your local nVent representative.

nVent requires the use of a 30 mA residual current device to provide maximum safety and protection from fire.

Where design results in higher leakage current, the preferred trip level for adjustable devices is 30 mA above any inherent capacitive leakage characteristic of the heater as specified by the trace heater supplier or alternatively, the next common available trip level for non adjustable devices, with a maximum of 300 mA. All safety aspects need to be proven.

APPROVALS

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

T6...T2 using stabilized design

nVent RAYCHEM heat-tracing products are approved for the listed temperature classifications by using the principles of stabilized design. Use TraceCalc design software or contact nVent.

Product certification













More details about product certification, approvals and conditions of safe use are available in the installation manual for Constant Wattage Parallel Circuit Heating Cable Systems at www.nVent.com/RAYCHEM

ORDERING INFORMATION

| Part description | 5VPL2-CT | 10VPL2-CT | 15VPL2-CT | 20VPL2-CT |
|------------------|------------|------------|------------|------------|
| Part No. | 451828-000 | 892652-000 | 068380-000 | 589252-000 |
| Part description | 5VPL4-CT | 10VPL4-CT | 15VPL4-CT | 20VPL4-CT |
| Part No. | P000000678 | P000000679 | P000000680 | P000000681 |
| Weight (g/m) | 200 | 200 | 200 | 200 |

Components

nVent offers a full range of components for power connections, splices and end seals.

These components must be used to ensure proper functioning of the product and compliance with electrical requirements.








FMT and **FHT**

CONNECT AND PROTECT

RAYCHEM

Constant wattage parallel circuit heating cable (Ex)

PRODUCT OVERVIEW

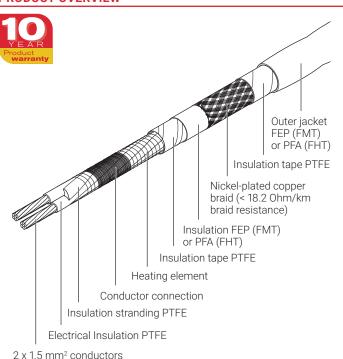

nVent RAYCHEM FMT and FHT are constant wattage parallel circuit heating cables designed for pipe and equipment heat-tracing in industrial applications. This family offers an economical alternative to our self-regulating heating cables but requires more skill for installation and also requires more advanced control and monitoring systems. Its unique round geometry provides excellent flexibility during installation as it allows for bending in every direction. The heating element which is the most fragile part of any constant wattage parallel circuit heating cable is protected by a PTFE insulation tape that eliminates shear stresses during flexing and also acts as a shock absorber, thereby providing a high level of protection. The heating cables can be used for frost protection and process temperature maintenance requiring high power output. The heating cables are zone parallel heaters constructed from a heating element wrapped around two parallel conductors. The distance between conductor contact points forms the heating zone length. The parallel construction allows it to be cut-to-length and terminated in the field.

FMT heating cables can withstand routine steam purges and temperature exposure to 200°C power off. They can be used to maintain temperatures up to 150°C (depending on cable type) and are only available in a 230 Vac version.

FHT heating cables can withstand routine steam purges and temperature exposure to 260°C power off. They can be used to maintain temperatures up to 230°C (depending on cable type) and are available for 230 Vac and 400 Vac supplies. The 400 Vac version offers a further advantage of long circuit lengths reducing the cost of the electrical installation.

Application

| Traced surface type | Carbon steel, Stainless steel, Painted or unpainted metal |
|---------------------|--|
| Chemical resistance | Organics and corrosives For aggressive organics and corrosives consult your local nVent representative |

PRODUCT SPECIFICATIONS

Dimensions (mm)

| | FMT2 | FHT2 | FHT4 |
|------|-------|-------|-------|
| Size | Ø 7.5 | Ø 7.5 | Ø 7.5 |

RAYCHEM-DS-EU1385-FMTFHT-EN-2401 nVent.com/RAYCHEM | 31



| | FINITZ | FHIZ | FH14 |
|---|--|---------------|---------------|
| Supply voltage | 190 - 277 Vac | 190 - 277 Vac | 385 - 415 Vac |
| Maximum continuous exposure temperature (power off) | 200°C | 260°C | 260°C |
| Cold lead/heating zone length | 1.5 m | 1.5 m | 2.5 m |
| Minimum installation temperature | -40°C | -60°C | -60°C |
| Minimum bending radius | $-60^{\circ}\text{C} \le T < -20^{\circ}\text{C}: 25 \text{ mm}$ $-20^{\circ}\text{C} \le T < -10^{\circ}\text{C}: 20 \text{ mm}$ $-10^{\circ}\text{C} \le T < +10^{\circ}\text{C}: 15 \text{ mm}$ $T \ge +10^{\circ}\text{C}: 12 \text{ mm}$ | | |
| Minimum clearance | 50 mm | 50 mm | 50 mm |
| Colour | White | Green | Violet |

| | Heating cable (nominal power: W/m) | | | | | | |
|---------|------------------------------------|-------------------|-------------------|--------|--------|--------|--------|
| Voltage | 10FMT2/ 10FHT2 | 20FMT2/ 20FHT2 | 30FMT2/ 30FHT2 | 40FHT2 | 10FHT4 | 20FHT4 | 30FHT4 |
| 230 Vac | 200 m | 150 m | 120 m | 85 m | _ | _ | _ |
| 400 Vac | _ | - | - | - | 330 m | 235 m | 190 m |

The above numbers are for circuit length estimation only. For more detailed information please use the nVent RAYCHEM TraceCalc software or Contact your local nVent representative. nVent requires the use of a 30 mA residual current device to provide maximum safety and protection from fire. Where design results in higher leakage current, the preferred trip level for adjustable devices is 30 mA above any inherent capacitive leakage characteristic of the heater as specified by the trace heater supplier or alternatively, the next common available trip level for non adjustable devices, with a maximum of 300 mA. All safety aspects need to be proven.

Maximum maintain or continuous exposure temperature °C (power on)

| Heating cable | Nominal power output (W/m) | 230 V a.c. | 254 V a.c. | 277 V a.c. |
|---------------|----------------------------|------------|------------|------------|
| 10FMT2-CT | 10 | 153 | 153 | 144 |
| 20FMT2-CT | 20 | 129 | 116 | 97 |
| 30FMT2-CT | 30 | 94 | 71 | 36 |
| 10FHT2-CT | 10 | 229 | 225 | 219 |
| 20FHT2-CT | 20 | 209 | 199 | 187 |
| 30FHT2-CT | 30 | 184 | 168 | 143 |
| 40FHT2-CT | 40 | 154 | 130 | 87 |
| | | 385 V a.c. | 400 V a.c. | 415 V a.c. |
| 10FHT4-CT | 10 | 250 | 250 | 249 |
| 20FHT4-CT | 20 | 224 | 221 | 218 |
| 30FHT4-CT | 30 | 212 | 208 | 205 |

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

FHT: T6...T2 FMT: T6...T3

nVent RAYCHEM heat-tracing products are approved for the listed temperature classifications by using the principles of stabilized design. Use TraceCalc design software or contact nVent.

Product certification









More details about product certification, approvals and conditions of safe use are available in the installation manual for the Selfregulating and Power limiting heating cable systems at www.nVent.com/RAYCHEM.




ORDERING INFORMATION

| Part description & part no. | Part description & part no. | Part description & part no. |
|-----------------------------|-----------------------------|-----------------------------|
| 10FMT2-CT: 1244-006057 | 10FHT2-CT: 1244-006060 | 10FHT4-CT: 1244-006064 |
| 20FMT2-CT: 1244-006058 | 20FHT2-CT: 1244-006061 | 20FHT4-CT: 1244-006065 |
| 30FMT2-CT: 1244-006059 | 30FHT2-CT: 1244-006062 | 30FHT4-CT: 1244-006066 |
| | 40FHT2-CT: 1244-006063 | |



Polymer insulated (PI) series resistance heating cable 🖘

PRODUCT OVERVIEW

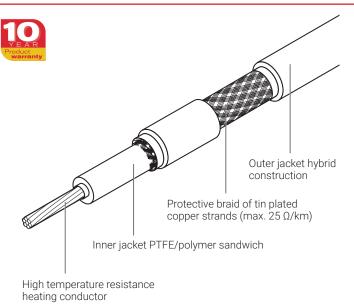

nVent RAYCHEM XPI-F is a polymer insulated (PI) series heating cable, suitable for use in ordinary and hazardous areas. It has been designed for freeze protection and low temperature maintenance applications on pipes, tanks and other equipment.

XPI-F offers an economical solution for a wide variety of heattracing applications, in particular for pipe lengths beyond the maximum circuit lengths of parallel heating cables.

The inner insulation is a sandwich construction of PTFE and PE, the outer insulation is a hybrid PE construction. The use of PTFE in the construction makes it very easy to terminate, provides flexibility, eliminates internal mechanical and thermal stress and makes XPI-F a very safe and reliable product. The PE provides a good chemical withstand and excellent mechanical strength.

XPI-F heating cables can be used for temperatures up to 90°C (continuous) and 100°C (intermittent short-term exposure), making it a an ideal PI heating cable for transfer lines and large tanks with limited temperature requirements.

XPI-F is easy to install and has printed meter-marks. nVent offers XPI-F heating cables in a wide range of resistances, starting from 1.8 Ω /km up to 200 Ω /km as well as a complete range of components for connection and splicing.

Application

PRODUCT SPECIFICATIONS

| Technical details | |
|-------------------------------|--|
| Max. exposure temperature | 90°C (power off, continuous), 100°C (power off, intermittent for max 1000 h) |
| Min. installation temperature | -60°C |
| Min. bending radius at −55°C | 7.5 x cable diameter |
| Max. power output | 20 W/m (typical value, depending on application) |
| Nominal voltage | Up to 300/500 Vac (U0/U) |
| Min. impact resistance | 4 Joule (as per EN 60079-30-1) |
| Min. clearance | 20 mm between heating cables |

Heating Cables







T6 ... T2

nVent RAYCHEM heat-tracing products are approved for the listed temperature classifications by using the principles of stabilized design. Use TraceCalc design software or contact nVent.

Product certification













More details about product certification, approvals and conditions of safe use are available in the installation manual for Polymer Insulated (PI) Series Constant Wattage Heating Cable Systems at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

XPI-F heating cable references

| Order reference | Nominal resistance [Ω/km @ 20°C] | Temp. coefficient [x 10 ⁻³ / K] | Outer diameter [mm nom.] | Nom. weight (kg/km) | Part number PN |
|-----------------|-------------------------------------|---|--------------------------|---------------------|-------------------|
| XPI-F-1.8 | 1.8 | 4.3 | 9.5 | 208 | 1244-018798 |
| XPI-F-2.9 | 2.9 | 4.3 | 7.8 | 143 | 1244-018799 |
| XPI-F-4.4 | 4.4 | 4.3 | 7.2 | 112 | 1244-018800 |
| XPI-F-7 | 7 | 4.3 | 6.6 | 83 | 1244-018801 |
| XPI-F-10 | 10 | 4.3 | 6.5 | 76 | 1244-018802 |
| XPI-F-11.7 | 11.7 | 4.3 | 6.4 | 65 | 1244-018803 |
| XPI-F-15 | 15 | 4.3 | 6.1 | 61 | 1244-018804 |
| XPI-F-17.8 | 17.8 | 4.3 | 6 | 57 | 1244-018805 |
| XPI-F-25 | 25 | 3 | 6 | 57 | 1244-018806 |
| XPI-F-31.5 | 31.5 | 1.3 | 6.4 | 67 | 1244-018807 |
| XPI-F-50 | 50 | 1.3 | 6 | 57 | 1244-018808 |
| XPI-F-65 | 65 | 1.3 | 5.7 | 53 | 1244-018809 |
| XPI-F-80 | 80 | 0.7 | 6.1 | 61 | 1244-018810 |
| XPI-F-100 | 100 | 1.3 | 5.4 | 67 | 1244-018811 |
| XPI-F-150 | 150 | 0.4 | 5.9 | 48 | 1244-018812 |
| XPI-F-200 | 200 | 0.4 | 5.6 | 53 | 1244-018814 |

Resistance tolerance: +10/-5%. In particular for cables < 31.5 Ω /km the resistance of the conductor materials is a function of temperature and the change must be considered for design purposes.

Recommended cold lead cables for XPI-F (Cold lead cables from XPI can be used alternatively)

| Order reference | Nominal resistance [Ω/km @ 20°C] | Temperature coefficient [x 10 ⁻³ /K] | Outer diameter [mm nom.] | Nom. cross section [mm²] | Current rating [A] | Part number PN |
|-----------------|--|---|-----------------------------|-----------------------------|--------------------|-------------------|
| XPI-F-7 | 7 | 4.3 | 6.6 | 2.5 | 32 | 1244-018801 |
| XPI-F-4.4 | 4.4 | 4.3 | 7.2 | 4 | 42 | 1244-018800 |
| XPI-F-2.9 | 2.9 | 4.3 | 7.8 | 6 | 54 | 1244-018799 |
| XPI-F-1.8 | 1.8 | 4.3 | 9.5 | 10 | 73 | 1244-018798 |

Notes: Delivery length depends on type of resistance and is limited by max. weight of 120 kg/spool, respectively 1000 m/run. To ensure practical and safe on-site handling, it is strongly recommended to limit spool lengths to 25 - 30 kg. Not all resistances are standard items and as such may not be in stock. Contact nVent to confirm lead time. nVent requires the use of a 30 mA residual current device to provide maximum safety and protection from fire.

Where design results in higher leakage current, the preferred trip level for adjustable devices is 30 mA above any inherent capacitive leakage characteristic of the heater as specified by the trace heater supplier or alternatively, the next common available trip level for non adjustable devices, with a maximum of 300 mA. All safety aspects need to be proven.








Polymer insulated (PI) series resistance heating cable (Ex)

PRODUCT OVERVIEW

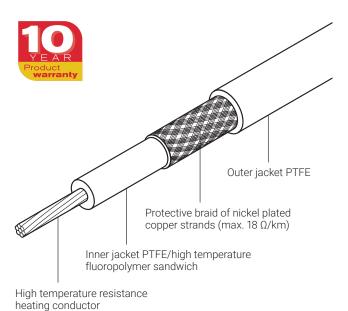

nVent RAYCHEM XPI is a polymer insulated (PI) series heating cable, suitable for use in hazardous areas. It has been designed for use in freeze protection and temperature maintenance applications of pipes, tanks and other equipment. XPI offers an economical solution for a wide variety of heat-tracing applications, in particular for pipe lengths beyond the maximum circuit lengths of parallel heating cables.

The inner insulation is a sandwich construction of high temperature fluoropolymer and PTFE, the outer insulation is made of PTFE. This unique construction is very easy to terminate, highly flexible and makes XPI a very safe and reliable product. It provides highest chemical withstand and excellent mechanical strength, in particular at elevated temperatures.

XPI heating cables can be used for temperatures up to 260°C (continuous) and 300°C (intermittent short-term exposure). XPI is easy to install and has printed meter-marks. nVent RAYCHEM offers XPI heating cables in a very wide range of resistances, starting from 0.8 Ω /km up to 8000 Ω /km as well as a complete range of components for connection and splicing of the cables.

Application

| Chemical resistance | Organic and inorganic corrosives | | | | | |
|-------------------------------|---|--|--|--|--|--|
| PRODUCT SPECIFICATIONS | | | | | | |
| Technical details | | | | | | |
| Max. exposure temperature | 260°C (power off, continuous), 300°C (power off, intermittent for max 1000 h) | | | | | |
| Min. installation temperature | −70°C | | | | | |
| Min. bending radius at −70°C | 2.5 x cable diameter for cable diameter ≤ 6 mm 6 x cable diameter for cable diameter > 6 mm | | | | | |
| Max. power output | 35 W/m (typical value, depending on application) | | | | | |
| Nominal voltage | Up to 450/750 Vac (U0/U) | | | | | |
| Min. impact resistance | 4 Joule (as per EN 60079-30-1) | | | | | |
| Min. clearance | 20 mm between heating cables | | | | | |







Temperature classification

T6...T2 using stabilized design

nVent RAYCHEM heat-tracing products are approved for the listed temperature classifications by using the principles of stabilized design. Use TraceCalc design software or contact nVent.

Product certification









For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)





More details about product certification, approvals and conditions of safe use are available in the Polymer insulated series constant wattage heating system installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

| Order reference | Nominal resistance [Ω/km @ 20°C] | Temp. coefficient [x 10 ⁻³ / K] | Outer diameter [mm nom.] | Nom. weight (kg/km) | Part number PN |
|-----------------|-------------------------------------|---|--------------------------|------------------------|-------------------|
| XPI-0.8 | 0.8 | 4.3 | 11.9 | 404 | 1244-000189 |
| XPI-1.1 | 1.1 | 4.3 | 10.1 | 306 | 1244-000201 |
| XPI-1.8 | 1.8 | 4.3 | 8.6 | 208 | 1244-000182 |
| XPI-2.9 | 2.9 | 4.3 | 6.9 | 143 | 1244-000202 |
| XPI-4.4 | 4.4 | 4.3 | 6.1 | 112 | 1244-000190 |
| XPI-7 | 7 | 4.3 | 5.5 | 83 | 1244-000203 |
| XPI-10 | 10 | 4.3 | 5.4 | 76 | 1244-000204 |
| XPI-11.7 | 11.7 | 4.3 | 5.2 | 65 | 1244-000183 |
| XPI-15 | 15 | 4.3 | 5.1 | 61 | 1244-000191 |
| XPI-17.8 | 17.8 | 4.3 | 4.9 | 57 | 1244-000178 |
| XPI-25 | 25 | 3 | 4.9 | 57 | 1244-000192 |
| XPI-31.5 | 31.5 | 1.3 | 5.3 | 67 | 1244-000205 |
| XPI-50 | 50 | 1.3 | 4.9 | 57 | 1244-000184 |
| XPI-65 | 65 | 1.3 | 4.8 | 53 | 1244-000206 |
| XPI-80 | 80 | 0.7 | 5.1 | 61 | 1244-000193 |
| XPI-100 | 100 | 0.4 | 5.2 | 67 | 1244-000207 |
| XPI-150 | 150 | 0.4 | 4.9 | 57 | 1244-000185 |
| XPI-200 | 200 | 0.4 | 4.8 | 53 | 1244-000195 |
| XPI-320 | 320 | 0.18 | 4.9 | 56 | 1244-000653 |
| XPI-380 | 380 | 0.18 | 4.8 | 53 | 1244-000180 |
| XPI-480 | 480 | 0.18 | 4.7 | 51 | 1244-000208 |
| XPI-600 | 600 | 0.18 | 4.5 | 48 | 1244-000196 |
| XPI-700 | 700 | 0.18 | 4.5 | 46 | 1244-000186 |
| XPI-810 | 810 | 0.04 | 4.6 | 50 | 1244-000209 |
| XPI-1000 | 1000 | 0.04 | 4.5 | 48 | 1244-000197 |
| XPI-1440 | 1440 | 0.04 | 4.4 | 45 | 1244-000211 |
| XPI-1750 | 1750 | 0.04 | 4.3 | 43 | 1244-000198 |
| XPI-2000 | 2000 | 0.35 | 4.6 | 49 | 1244-000187 |
| XPI-3000 | 3000 | 0.35 | 4.4 | 45 | 1244-000212 |
| XPI-4000 | 4000 | 0.35 | 4.2 | 42 | 1244-000199 |
| XPI-4400 | 4400 | 0.1 | 4.3 | 43 | 1244-000181 |
| XPI-5160 | 5160 | 0.1 | 4.3 | 42 | 1244-000654 |
| XPI-5600 | 5600 | 0.1 | 4.2 | 41 | 1244-000188 |
| XPI-7000 | 7000 | 0.1 | 4.2 | 40 | 1244-000213 |
| XPI-8000 | 8000 | 0.1 | 4.1 | 40 | 1244-000200 |

Resistance tolerance: +10/-5%. In particular for cables < 31.5 Ω /km the resistance of the conductor materials is a function of temperature and the change must be considered for design purposes.

E







Recommended cold lead cables for XPI (cold lead cables from XPI-S can be used alternatively)

| Nom. cross section [mm²] | Current rating | Outer diameter [mm nom.] | Nominal resistance [Ω/km @ 20°C] | Temperature coefficient [x 10 ⁻³ /K] | Order reference | Part number PN |
|-----------------------------|----------------|-----------------------------|--|---|-----------------|-------------------|
| 2.5 | 32 | 5.5 | 7 | 4.3 | XPI-7 | 1244-000203 |
| 4 | 42 | 6.1 | 4.4 | 4.3 | XPI-4.4 | 1244-000190 |
| 6 | 54 | 6.9 | 2.9 | 4.3 | XPI-2.9 | 1244-000202 |
| 10 | 73 | 8.6 | 1.8 | 4.3 | XPI-1.8 | 1244-000182 |
| 16 | 98 | 10.1 | 1.1 | 4.3 | XPI-1.1 | 1244-000201 |
| 25 | 129 | 11.9 | 0.8 | 4.3 | XPI-0.8 | 1244-000189 |


Notes: Delivery length depends on type of resistance and is limited by max. weight of 120 kg/spool, respectively 1000 m/run. To ensure practical and safe on-site handling, it is strongly recommended to limit spool lengths to 25 - 30 kg. Not all resistances are standard items and as such may not be in stock. Contact nVent to confirm lead time. nVent requires the use of a 30 mA residual current device to provide maximum safety and protection from fire.

Where design results in higher leakage current, the preferred trip level for adjustable devices is 30 mA above any inherent capacitive leakage characteristic of the heater as specified by the trace heater supplier or alternatively, the next common available trip level for non adjustable devices, with a maximum of 300 mA. All safety aspects need to be proven.



Polymer insulated (PI) series resistance heating cable (Ex)

PRODUCT OVERVIEW

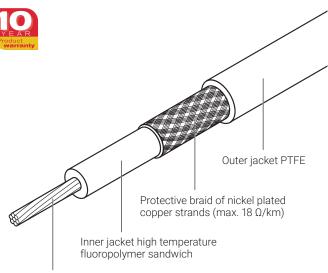

High temperature resistance heating conductor

nVent RAYCHEM XPI-S is a polymer insulated (PI) series heating cable, suitable for use in hazardous areas. It has been designed for use in freeze protection and temperature maintenance applications of pipes, tanks and other equipment. XPI-S is a re-enforced version of XPI, particularly suitable for areas with high demands on mechanical abuse of the heating cable. XPI-S offers an economical solution for a wide variety of heat-tracing applications, in particular for pipe lengths beyond the maximum circuit lengths of parallel heating cables (e.g. 250 m).

The inner insulation is a sandwich construction of high temperature fluoropolymer and PTFE, the outer insulation is made of PTFE. This unique construction is very easy to terminate, highly flexible and makes XPI a very safe and reliable product. It provides highest chemical withstand and most excellent mechanical strength, in particular at elevated temperatures.

XPI-S heating cables can be used for temperatures up to 260°C (continuous) and 300°C (intermittent short-term exposure). XPI-S is easy to install and has printed meter-marks. nVent RAYCHEM offers XPI-S heating cables in a very wide range of resistances, starting from 0.8 Ω /km up to 8000 Ω /km as well as a complete range of components for connection and splicing of the cables.

Application

Chemical resistance Organic and inorganic corrosives

PRODUCT SPECIFICATIONS

RAYCHEM-DS-EU1387-XPIS-EN-2401

| PRODUCT SPECIFICATIONS | |
|-------------------------------|--|
| Technical details | |
| Max. exposure temperature | 260°C (power off, continuous), 300°C (power off, intermittent for max 1000 h) |
| Min. installation temperature | -70°C |
| Min. bending radius at −70°C | 2.5 x cable diameter for cable diameter ≤ 6 mm 6 x cable diameter for cable diameter > 6 mm |
| Max. power output | 35 W/m (typical value, depending on application) |
| Nominal voltage | Up to 450/750 Vac (U0/U) |
| Min. impact resistance | 7 Joule (as per EN 60079-30-1) |
| Min. clearance | 20 mm between heating cables |

 \equiv







Temperature classification

T6...T2: using stabilized design

nVent RAYCHEM heat-tracing products are approved for the listed temperature classifications by using the principles of stabilized design. Use TraceCalc design software or contact nVent.

Product certification







For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)





More details about product certification, approvals and conditions of safe use are available in the Polymer insulated series constant wattage heating system installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

| Order reference | Nominal Resistance [Ω/km @ 20°C] | Temp. Coefficient [x 10 ⁻³ / K] | Outer Diameter [mm nom.] | Nom. Weight (kg/km) | Part Number PN |
|-----------------|-------------------------------------|---|-----------------------------|------------------------|-------------------|
| XPI-S-0.8 | 0.8 | 4.3 | 11.9 | 405 | 1244-003047 |
| XPI-S-1.1 | 1.1 | 4.3 | 10.1 | 307 | 1244-003048 |
| XPI-S-1.8 | 1.8 | 4.3 | 8.6 | 209 | 1244-003049 |
| XPI-S-2.9 | 2.9 | 4.3 | 7.1 | 149 | 1244-003050 |
| XPI-S-4.4 | 4.4 | 4.3 | 6.5 | 116 | 1244-003051 |
| XPI-S-7 | 7 | 4.3 | 5.9 | 88 | 1244-003052 |
| XPI-S-10 | 10 | 4.3 | 5.8 | 84 | 1244-003053 |
| XPI-S-11.7 | 11.7 | 4.3 | 5.6 | 76 | 1244-003054 |
| XPI-S-15 | 15 | 4.3 | 5.5 | 71 | 1244-003055 |
| XPI-S-17.8 | 17.8 | 4.3 | 5.3 | 68 | 1244-003056 |
| XPI-S-25 | 25 | 3 | 5.5 | 72 | 1244-003057 |
| XPI-S-31.5 | 31.5 | 1.3 | 5.9 | 82 | 1244-003058 |
| XPI-S-50 | 50 | 1.3 | 5.5 | 72 | 1244-003059 |
| XPI-S-65 | 65 | 1.3 | 5.4 | 66 | 1244-003060 |
| XPI-S-80 | 80 | 0.7 | 5.7 | 75 | 1244-003061 |
| XPI-S-100 | 100 | 0.4 | 5.8 | 79 | 1244-003062 |
| XPI-S-150 | 150 | 0.4 | 5.8 | 78 | 1244-003063 |
| XPI-S-200 | 200 | 0.4 | 5.7 | 72 | 1244-003065 |
| XPI-S-320 | 320 | 0.18 | 5.8 | 76 | 1244-003066 |
| XPI-S-380 | 380 | 0.18 | 5.7 | 73 | 1244-003067 |
| XPI-S-480 | 480 | 0.18 | 5.6 | 70 | 1244-003068 |
| XPI-S-600 | 600 | 0.18 | 5.4 | 67 | 1244-003069 |
| XPI-S-700 | 700 | 0.18 | 5.4 | 65 | 1244-003070 |
| XPI-S-810 | 810 | 0.04 | 5.5 | 69 | 1244-003071 |
| XPI-S-1000 | 1000 | 0.04 | 5.4 | 67 | 1244-003072 |
| XPI-S-1440 | 1440 | 0.04 | 5.6 | 69 | 1244-003073 |
| XPI-S-1750 | 1750 | 0.04 | 5.5 | 67 | 1244-003074 |
| XPI-S-2000 | 2000 | 0.35 | 5.8 | 74 | 1244-003075 |
| XPI-S-3000 | 3000 | 0.35 | 5.6 | 69 | 1244-003076 |
| XPI-S-4000 | 4000 | 0.35 | 5.4 | 65 | 1244-003077 |
| XPI-S-4400 | 4400 | 0.1 | 5.5 | 66 | 1244-003078 |
| XPI-S-5160 | 5160 | 0.1 | 5.5 | 66 | 1244-003079 |
| XPI-S-5600 | 5600 | 0.1 | 5.4 | 63 | 1244-003080 |
| XPI-S-7000 | 7000 | 0.1 | 5.4 | 61 | 1244-003081 |
| XPI-S-8000 | 8000 | 0.1 | 5.3 | 60 | 1244-003082 |

Resistance tolerance: +10/-5%. In particular for cables < 31.5 Ω /km the resistance of the conductor materials is a function of temperature and the change must be considered for design purposes.





Heating Cables

Recommended cold lead cables for XPI-S

| Nom. Cross Section [mm²] | Current Rating [A] | Outer Diameter [mm nom.] | Nominal Resistance [Ω/km @ 20°C] | Temperature Coefficient [x 10 ⁻³ /K] | Order Reference | Part Number PN |
|-----------------------------|-----------------------|-----------------------------|--|---|-----------------|-------------------|
| 2.5 | 32 | 5.9 | 7 | 4.3 | XPI-S-7 | 1244-003052 |
| 4 | 42 | 6.5 | 4.4 | 4.3 | XPI-S-4.4 | 1244-003051 |
| 6 | 54 | 7.1 | 2.9 | 4.3 | XPI-S-2.9 | 1244-003050 |
| 10 | 73 | 8.6 | 1.8 | 4.3 | XPI-S-1.8 | 1244-003049 |
| 16 | 98 | 10.1 | 1.1 | 4.3 | XPI-S-1.1 | 1244-003048 |
| 25 | 129 | 11.9 | 0.8 | 4.3 | XPI-S-0.8 | 1244-003047 |

Notes: Delivery length depends on type of resistance and is limited by max. weight of 120 kg/spool, respectively 1000 m/run. To ensure practical and safe on-site handling, it is strongly recommended to limit spool lengths to 25 - 30 kg. Not all resistances are standard items and as such may not be in stock. Contact nVent to confirm lead time.

nVent requires the use of a 30 mA residual current device to provide maximum safety and protection from fire.

Where design results in higher leakage current, the preferred trip level for adjustable devices is 30 mA above any inherent capacitive leakage characteristic of the heater as specified by the trace heater supplier or alternatively, the next common available trip level for non adjustable devices, with a maximum of 300 mA. All safety aspects need to be proven.












Mineral insulated (MI) copper sheathed heating cable (Ex)

PRODUCT OVERVIEW

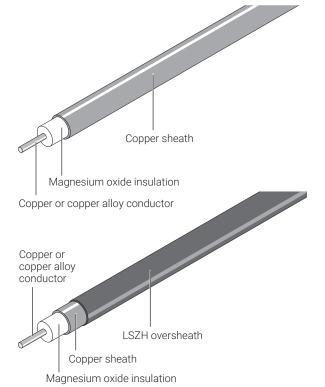

nVent RAYCHEM HCH/HCC mineral insulated (MI) Copper series heating cables are suited for use in hazardous areas. They are extensively used in a wide variety of industrial heattracing applications, such as long line heating or condensation prevention at low temperatures, and domestic applications, such as under floor or road and ramp heating applications. The copper heating cables with copper conductors (HCC) are available in very low resistances to allow for long line applications with a limited amount of supply points when the maximum operating sheath temperature does not exceed 200°C. The typical maximum power output goes up to 50 W/m. Cables are available with an optional LSZH (Low Smoke Zero Halogen) over-sheath for enhanced corrosion protection up to 80°C, usually applied when buried in concrete. The heating cables are offered as bulk cable as well as factory-terminated heating units to ensure optimum quality of the connections. The offering is completed with a full range of components for installation, connection and splicing of the heating cables.

PRODUCT SPECIFICATIONS

Technical details

| recillical details | | | | | |
|-------------------------------|------------------------------------|--|--|--|--|
| Cable sheath material | Copper | | | | |
| Conductor material | Copper (HCC) or Copper Alloy (HCH) | | | | |
| Max. exposure temperature | 200°C** | | | | |
| Min. installation temperature | -60°C | | | | |
| Min. bending radius | 6 x outer diameter at −60°C | | | | |
| Max. supply voltage and power | Voltage (U0/U) 300/500 Vac | Max. power output* 50 W/m *typical value, depending on application | | | |
| Earth leakage | 3 mA/100 m (nominal at 20°C, 230 | Vac, 50 - 60Hz) | | | |
| Min. cable spacing | 25 mm for hazardous areas | | | | |

^{**} Note: Cables available with optional additional oversheath for corrosion protection:

- LSZH (Max Sheath temp 80°C) - add R to the ref. (HCHR...)







For LSZH add 1.8 mm to cable OD.

MI series heating cables HCH/HCC

| Order Reference | Nominal resistance (Ω/km @ 20°C) | Outer diameter (mm) | Temp. coefficient (x 10 ⁻³ /K) | Max. coil length [m] | Nom.weight (kg/km) |
|--------------------------|-------------------------------------|---------------------|---|-------------------------|-----------------------|
| HCH1L2000 ⁽¹⁾ | 2000 | 2.8 | 0.4 | 1200 | 31 |
| HCH1L1250 ⁽¹⁾ | 1250 | 2.8 | 0.4 | 1200 | 32 |
| HCH1M800 | 800 | 3.5 | 0.4 | 900 | 50 |
| HCH1M630 | 630 | 4 | 0.4 | 1100 | 65 |
| HCH1M450 | 450 | 4 | 0.4 | 1000 | 67 |
| HCH1M315 | 315 | 4.3 | 0.4 | 1000 | 77 |
| HCH1M220 | 220 | 4.5 | 0.4 | 1000 | 85 |
| HCH1M140 | 140 | 4.9 | 0.4 | 1000 | 102 |
| HCH1M100 | 100 | 5.2 | 0.4 | 800 | 125 |
| HCC1M63 | 63 | 3.2 | 3.9 | 2000 | 41 |
| HCC1M40 | 40 | 3.4 | 3.9 | 2000 | 46 |
| HCC1M25 | 25 | 3.7 | 3.9 | 1600 | 56 |
| HCC1M17 | 17 | 4.6 | 3.9 | 500 | 85 |
| HCC1M11 | 11 | 4.9 | 3.9 | 500 | 98 |
| HCC1M7 | 7 | 5.3 | 3.9 | 400 | 118 |
| HCC1M4 | 4 | 5.9 | 3.9 | 800 | 150 |
| HCC1M2.87 | 2.87 | 6.4 | 3.9 | 650 | 170 |
| HCC1M1.72 | 1.72 | 7.3 | 3.9 | 500 | 235 |
| HCC1M1.08 | 1.08 | 8.3 | 3.9 | 400 | 326 |

⁽¹⁾ Not approved for hazardous areas, maximum 300 Vac.

Recommended cold leads for HCH/HCC MI series heating cables

| Cold Lead Code | Sheath Material | Current Rating (A) | Voltage Rating (Vac) | No of Conductors | Design* | Cable O.D. (mm) | Pigtail Size (mm²) | Gland Size |
|-------------------|--------------------|-----------------------|-------------------------|---------------------|---------|--------------------|-----------------------|---------------|
| C31A | Copper | 31 | 600 | 1 | В | 5.8 | 2.1 | M25 |
| C41A | Copper | 41 | 600 | 1 | В | 7 | 3.3 | M25 |
| C54A | Copper | 54 | 600 | 1 | В | 6.2 | 5.3 | M25 |
| C70A | Copper | 70 | 600 | 1 | В | 7.6 | 8.4 | M25 |
| C94A | Copper | 94 | 600 | 1 | В | 8.6 | 13.3 | M25 |
| C127A | Copper | 127 | 600 | 1 | В | 10.2 | 21.1 | M25 |

^{*} For details on the different heating unit designs, refer to chapter MI heating Systems - MI heating Cables in the Databook (reference DOC-2210)

Nickel plated brass glands are standard on all copper sheathed heating units. Other materials are possible, contact nVent for more information. If a cold lead has an LSZH oversheath, the C in the order reference becomes an R. (example: C31A becomes R31A)

Delivery length of bulk cable on coil depends on type of resistance and is limited by max. coil length as indicated in the table on top. Factory terminated elements are limited by a max. weight of 50 kg, however to ensure practical and safe on-site handling, it is strongly recommended to limit element lengths to 25 - 30 kg. Not all resistances are standard items and as such may not be in stock.

Contact nVent to confirm lead time. nVent requires the use of a 30 mA residual current device to provide maximum safety and protection from fire.


Where design results in higher leakage current, the preferred trip level for adjustable devices is 30 mA above any inherent capacitive leakage characteristic of the heater as specified by the trace heater supplier or alternatively, the next common available trip level for non adjustable devices, with a maximum of 300 mA. All safety aspects need to be proven.

Also refer to the components section for more details on heating units, accessories and nomenclatures.







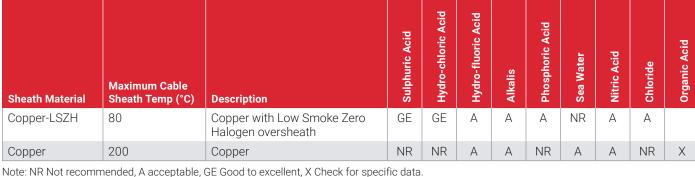

Corrosion resistance data is dependent on temperature and concentration.

APPROVALS

For use in ordinary and hazardous* area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust) *Cable types HCH1L2000 and HCH1L1250 can only be used in ordinary areas

Temperature classification

T6...T2

nVent RAYCHEM heat-tracing products are approved for the listed temperature classifications by using the principles of stabilized design. Use TraceCalc design software or contact nVent.

Product certification















More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.


ORDERING INFORMATION

- Due to the sensitivity & craftsmanship required to assemble an MI heating unit, they are usually purchased as factory terminated units. Refer to the "MI Heating Systems Nomenclature" datasheet for more information on the ordering references for complete units or contact your local nVent representative.
- It is strongly recommended to use nVent design software such as TraceCalc Pro to validate the design and ordering string.
- · To purchase MI heating cables in bulk, refer to the tables with the cable references on p. 2 of this document.



Mineral insulated Cupro-Nickel sheathed heating cable 🖾

PRODUCT OVERVIEW

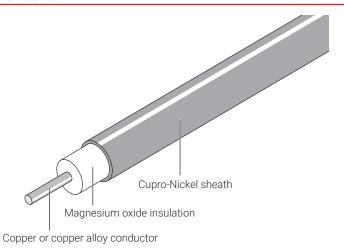

nVent RAYCHEM HDC/HDF mineral insulated (MI) Cupro-Nickel series heating cables are suited for use in hazardous areas. They are extensively used for a wide variety of industries, such as oil and gas, chemical and petrochemical, power generation, gas storage and many other industrial applications. Cupro-Nickel heating cables with copper conductors (HDC) are available in very low resistances to allow for long line applications with a limited amount of supply points, in particular for applications exceeding the capabilities of Polymer Insulated (PI) series heating cables. The heating cables can be used for exposure temperatures up to 400°C and a typical power output up to 70 W/m. The heating cables are offered as bulk cable as well as factory-terminated heating units to ensure optimum quality of the connections. The offering is completed with a full range of components for installation, connection and splicing of the heating cables.

PRODUCT SPECIFICATIONS

RAYCHEM-DS-EU1389-HDFHDC-EN-2401

| Cable sheath material | 70/30 Cupro-Nickel | | |
|-------------------------------|--|--|--|
| Conductor material | Copper (HDC) or Copper Alloy (HDF) | | |
| Max. exposure temperature | 400°C | | |
| Min. installation temperature | -60°C | | |
| Min. bending radius | 6 x outer diameter at −60°C | | |
| Max. supply voltage and power | Voltage (U ₀ /U) Max. power output* 300/500 Vac 70 W/m *typical value, depending on application | | |
| Earth leakage | 3 mA/100 m (nominal at 20°C, 230 Vac, 50 - 60 Hz) | | |
| Min. cable spacing | 25 mm for hazardous areas | | |





MI series heating cables HDF/HDC

| Order reference | Nominal resistance (Ω/km @ 20°C) | Outer diameter (mm) | Temp. coefficient (x 10 ⁻³ /K) | Max. coil length [m] | Nom.weight (kg/km) |
|-----------------|-------------------------------------|---------------------|---|-------------------------|-----------------------|
| HDF1M1600 | 1600 | 3.2 | 0.04 | 625 | 40 |
| HDF1M1000 | 1000 | 3.4 | 0.04 | 550 | 45 |
| HDF1M630 | 630 | 3.7 | 0.04 | 465 | 55 |
| HDF1M400 | 400 | 4 | 0.04 | 400 | 67 |
| HDF1M250 | 250 | 4.4 | 0.04 | 330 | 84 |
| HDF1M160 | 160 | 4.9 | 0.04 | 265 | 108 |
| HDC1M63 | 63 | 3.2 | 3.9 | 620 | 39 |
| HDC1M40 | 40 | 3.4 | 3.9 | 550 | 44 |
| HDC1M25 | 25 | 3.7 | 3.9 | 440 | 55 |
| HDC1M17 | 17 | 4.6 | 3.9 | 300 | 84 |
| HDC1M11 | 11 | 4.9 | 3.9 | 265 | 98 |
| HDC1M7 | 7 | 5.3 | 3.9 | 225 | 119 |
| HDC1M4 | 4 | 5.9 | 3.9 | 180 | 155 |

Recommended cold leads for HDF/HDC MI series heating cables

| Cold lead code | Sheath material | Current rating (A) | Voltage rating (Vac) | No of conductors | Design* | Cable O.D. (mm) | Pigtail size (mm²) | Gland size |
|----------------|--------------------|--------------------|-------------------------|------------------|---------|--------------------|-----------------------|---------------|
| S33A | Alloy 825 | 33 | 600 | 1 | В | 5.5 | 3.3 | M25 |
| S55A | Alloy 825 | 55 | 600 | 1 | В | 6.4 | 8.4 | M25 |
| S76A | Alloy 825 | 76 | 600 | 1 | В | 8.1 | 13.3 | M25 |
| S123A | Alloy 825 | 123 | 600 | 1 | В | 10.2 | 21.1 | M25 |

^{*} For details on the different heating unit designs, refer to chapter MI heating Systems - MI heating Cables in the Databook (reference DOC2210)

Nickel plated brass glands are standard on all heating units. Other materials are possible, contact nVent for more information. Cold leads attached to cupro nickel sheathed heating cables are provided with an Alloy 825 outer sheath. As the cold lead is an exposed component, not protected by insulation, it can be subject to extremely variable corrosive environments. The Alloy 825 sheath provides enhanced life expectancy with a superior level of corrosion protection against a wide range of exposure conditions.

By default, all cold leads are supplied with M25 glands intended for use with a standardized range of nVent RAYCHEM MI junction boxes which include an integral earth plate.

Delivery length of bulk cable on coil depends on type of resistance and is limited by max. coil length as indicated in the table on top. Factory terminated elements are limited by a max. weight of 50 kg, however to ensure practical and safe on-site handling, it is strongly recommended to limit element lengths to 25 - 30 kg. Not all resistances are standard items and as such may not be in stock. Contact nVent to confirm lead time. nVent requires the use of a 30 mA residual current device to provide maximum safety and protection from fire.

Where design results in higher leakage current, the preferred trip level for adjustable devices is 30 mA above any inherent capacitive leakage characteristic of the heater as specified by the trace heater supplier or alternatively, the next common available trip level for non adjustable devices, with a maximum of 300 mA. All safety aspects need to be proven.

Also refer to the components section for more details on heating units, accessories and nomenclatures.

Chemical resistance

| Sheath material | Maximum cable sheath temp (°C) | Description | Sulphuric acid | Hydrochloric acid | Hydrofluoric acid | Phosphoric acid | Nitric acid | Organic acid | Alkalis | Sea water | Chloride |
|--------------------|-----------------------------------|--|----------------|-------------------|-------------------|-----------------|-------------|--------------|---------|-----------|----------|
| Cupro-Nickel | 400 | Cupro-Nickel alloy 70% copper 30% nickel | NR | X | X | Χ | X | X | X | GE | GE |

Note: NR Not recommended, A acceptable, GE Good to excellent, X Check for specific data Corrosion resistance data is dependent on temperature and concentration.

Heating Cables

Temperature classification

T6 ... T1

nVent RAYCHEM heat-tracing products are approved for the listed temperature classifications by using the principles of stabilized design. Use TraceCalc design software or contact nVent.

Product certification









For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)







More details about product certification, approvals and conditions of safe use are available in the installation manual for Mineral Insulated (MI) series heating systems at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

- Due to the sensitivity & required craftsmanship to assemble an MI heating unit, they are usually purchased as factory terminated units. Refer to the "MI Heating Systems Nomenclature" datasheet for more information on the ordering references for complete units or contact your local nVent representative.
- It is strongly recommended to use nVent design software such as TraceCalc Pro to validate the design and ordering string.
- To purchase MI heating cables in bulk, refer to the tables with the cable references on page 2 of this document.


















Mineral insulated (MI) stainless steel sheathed heating cable 🖾

PRODUCT OVERVIEW

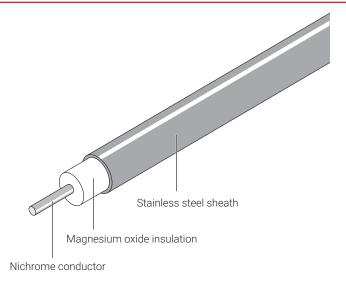

nVent RAYCHEM HSQ mineral insulated (MI) Stainless steel series heating cables are suited for use in hazardous areas. The Stainless steel sheath offers excellent corrosive properties against a wide range of organic acids and alkalis in combination with a high temperature withstand capability. HSQ cables are typically used in bitumen plants, gas plants, oil refineries, reactors and vessels, sodium loops and a wide variety of other heat-tracing applications where temperature resistance, power output and durability are paramount. The heating cables can be used for exposure temperatures up to 680°C and a typical power output up to 150 W/m. Higher temperatures and power outputs can be achieved, contact nVent for assistance. The heating cables are offered as bulk cables as well as factory-terminated heating units employing brazing or laser welding techniques to ensure optimum quality of the connections. The offering is completed with a full range of components for installation, connection and splicing of the heating cables.

PRODUCT SPECIFICATIONS

| | | - |
|-------------------------------|--|---|
| Technical details | | |
| Cable sheath material | 321 Stainless steel | |
| Conductor material | Nichrome | |
| Max. exposure temperature | 550°C (brazed heating units) 680°C* (laser welded heating units) *Higher temperatures can be realized, cor | ntact nVent |
| Min. installation temperature | -60°C | |
| Min. bending radius | 6 x outer diameter at -60°C | |
| Max. supply voltage and power | Voltage (Uo/U) 300/500 Vac 460/600 Vac (laser welded heating units) | Max. power output* 150 W/m *typical value, depending on application |
| Earth leakage | 3 mA/100 m (nominal at 20°C, 230 Vac, 5 | 0 - 60 Hz) |
| Min. cable spacing | 25 mm for hazardous areas | |

MI series heating cables HSQ

| Order Reference | Nominal Resistance (Ω/km @ 20°C) | Outer Diameter (mm) | Temp. Coefficient (x 10 ⁻³ /K) | Max. Coil Length [m] | Nom. Weight (kg/km) |
|-----------------|----------------------------------|------------------------|---|-------------------------|---------------------|
| HSQ1M10K | 10000 | 3.2 | 0.09 | 740 | 39 |
| HSQ1M6300 | 6300 | 3.2 | 0.09 | 741 | 39 |
| HSQ1M4000 | 4000 | 3.2 | 0.09 | 743 | 39 |
| HSQ1M2500 | 2500 | 3.4 | 0.09 | 660 | 46 |
| HSQ1M1600 | 1600 | 3.6 | 0.09 | 591 | 52 |
| HSQ1M1000 | 1000 | 3.9 | 0.09 | 506 | 62 |
| HSQ1M630 | 630 | 4.3 | 0.09 | 419 | 78 |
| HSQ1M400 | 400 | 4.7 | 0.09 | 354 | 96 |
| HSQ1M250 | 250 | 5.3 | 0.09 | 280 | 127 |
| HSQ1M160 | 160 | 6.5 | 0.09 | 187 | 191 |

Recommended cold leads for HSQ MI series heating cables

| Cold Lead Code | Sheath Material | Current Rating (A) | Voltage Rating (Vac) | No. of Conductors | Design* | Cable O.D. (mm) | Pigtail Size (mm²) | Gland Size |
|-------------------|--------------------|-----------------------|-------------------------|----------------------|---------|--------------------|-----------------------|---------------|
| S33A | Alloy 825 | 33 | 600 | 1 | В | 5.5 | 3.3 | M25 |
| S55A | Alloy 825 | 55 | 600 | 1 | В | 6.4 | 8.4 | M25 |
| SC33A | Stainless steel | 33 | 600 | 1 | В | 5.5 | 3.3 | M25 |
| SC55A | Stainless steel | 55 | 600 | 1 | В | 6.4 | 8.4 | M25 |

^{*} For details on the different heating unit designs, refer to chapter MI heating Systems - MI heating Cables in the Databook (reference DOC2210)

Nickle plated brass glands are standard on all heating units. Other materials are possible, contact nVent for more information.

Cold leads attached to HSQ heating cables are provided with an Alloy 825 outer sheath when the joint connection method is brazed or SS321 sheath when the connection method is laser welded. As the cold lead is an exposed component, not protected by insulation, it can be subject to extremely variable corrosive environments. The Alloy 825 sheath provides enhanced life expectancy with a superior level of corrosion protection against a wide range of exposure conditions.

By default, all cold leads are supplied with M25 glands intended for use with a standardized range of nVent RAYCHEM MI junction boxes which include an integral earth plate. Delivery length of bulk cable on coil depends on type of resistance and is limited by max. coil length as indicated in the table on top. Factory terminated elements are limited by a max. weight of 50 kg, however to ensure practical and safe on-site handling, it is strongly recommended to limit element lengths to 25 - 30 kg. Not all resistances are standard items and as such may not be in stock. Contact nVent to confirm lead time. nVent requires the use of a 30 mA residual current device to provide maximum safety and protection from fire.

Where design results in higher leakage current, the preferred trip level for adjustable devices is 30 mA above any inherent capacitive leakage characteristic of the heater as specified by the trace heater supplier or alternatively, the next common available trip level for non adjustable devices, with a maximum of 300 mA. All safety aspects need to be proven.

Also refer to the components section for more details on heating units, accessories and nomenclatures.

Table 3 Chemical resistance

| Sheath Material | Description | Sulphuric Acid | Hydrochloric Acid | Hydrofluoric Acid | Phosphoric Acid | Nitric Acid | Organic Acid | Alkalis | Sea Water | Chloride |
|-----------------------------------|---|----------------|-------------------|-------------------|-----------------|-------------|--------------|---------|-----------|----------|
| Stainless Steel 321 DIN 1.4541 | 18/8 austenitic stainless steel with added titanium | NR | NR | NR | NR | X | GE | А | NR | NR |

Note: NR - Not recommended, A - Acceptable, GE - Good to excellent, X - Check for specific data Temperature limitation based on construction of heating element.

Corrosion resistance data is dependent on temperature and concentration.

RAYCHEM-DS-EU1390-HSQ-EN-2401 nVent.com/RAYCHEM 49





For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature Classification

T6 ... T1

nVent RAYCHEM heat-tracing products are approved for the listed temperature classifications by using the principles of stabilized design. Use TraceCalc design software or contact nVent.

Product certification















More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.


ORDERING INFORMATION

- Due to the sensitivity & craftsmanship required to assemble an MI heating unit, they are usually purchased as factory terminated units. Refer to the "MI Heating Systems Nomenclature" datasheet for more information on the ordering references for complete units or contact your local nVent representative.
- It is strongly recommended to use nVent design software such as TraceCalc Pro to validate the design and ordering string.
- · To purchase MI heating cables in bulk, refer to the tables with the cable references on page 2 in this document.



Mineral insulated (MI) Inconel sheathed heating cable 🖾

PRODUCT OVERVIEW

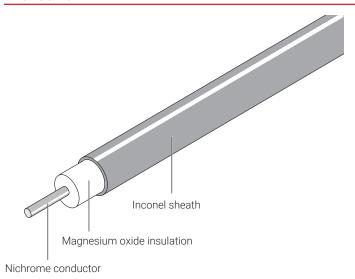

nVent RAYCHEM HIQ mineral insulated (MI) Inconel 600 series heating cables are suited for use in hazardous areas. The Inconel 600 sheath offers excellent corrosive properties against a wide range of organic acids and alkalis, as well as chloride stresscorrosion cracking, in combination with a high temperature withstand capability. HIQ cables are typically used in bitumen plants, gas plants, oil refineries, reactors and vessels, sodium loops and a wide variety of other heat-tracing applications where temperature resistance, power output and durability are required and exceed the limitations of stainless steel sheathed MI heating cables. The heating cables can be used for exposure temperatures up to 680°C and a typical power output up to 300 W/m. Higher temperatures and power outputs can be achieved, contact nVent for assistance. The heating cables are offered as bulk cables as well as factory-terminated heating units employing brazing or laser welding techniques to ensure optimum quality of the connections. The offering is completed with a full range of components for installation, connection and splicing of the heating cables.

PRODUCT SPECIFICATIONS

| Technical details | | |
|-------------------------------|--|--|
| Cable sheath material | Inconel 600 | |
| Conductor material | Nichrome | |
| Max. exposure temperature | 550°C (brazed heating units) 680°C* (laser welded heating units) *Higher temperatures can be realized, con | tact nVent |
| Min. installation temperature | -60°C | |
| Min. bending radius | 6 x outer diameter at −60°C | |
| Max. supply voltage and power | Voltage (U0/U) | Max. power output* |
| | 300/500 Vac | 300 W/m |
| | 460/600 Vac (laser welded heating units) | *typical value, depending on application |
| Earth leakage | 3 mA/100 m (nominal at 20°C) | |
| Min. cable spacing | 25 mm for hazardous areas | |

 \equiv













| Order Reference | Nominal Resistance (Ω/Km @ 20°C) | Outer Diameter (mm) | Temp. Coefficient (x 10 ⁻³ /K) | Max. Coil Length [m] | Nom.Weight (kg/km) |
|-----------------|-------------------------------------|------------------------|---|-------------------------|--------------------|
| HIQ1M10K | 10000 | 3.2 | 0.09 | 772 | 39 |
| HIQ1M6300 | 6300 | 3.2 | 0.09 | 774 | 39 |
| HIQ1M4000 | 4000 | 3.2 | 0.09 | 776 | 39 |
| HIQ1M2500 | 2500 | 3.4 | 0.09 | 689 | 46 |
| HIQ1M1600 | 1600 | 3.6 | 0.09 | 617 | 52 |
| HIQ1M1000 | 1000 | 3.9 | 0.09 | 528 | 62 |
| HIQ1M630 | 630 | 4.3 | 0.09 | 437 | 78 |
| HIQ1M400 | 400 | 4.7 | 0.09 | 368 | 96 |
| HIQ1M250 | 250 | 5.3 | 0.09 | 292 | 127 |
| HIQ1M160 | 160 | 6.5 | 0.09 | 194 | 191 |

Recommended cold leads for HIQ MI series heating cables

| Cold Lead Code | Sheath Material | Current Rating (A) | Voltage Rating (Vac) | No of Conductors | Design* | Cable O.D. (mm) | Pigtail Size (mm²) | Gland Size |
|-------------------|--------------------|-----------------------|-------------------------|---------------------|---------|--------------------|-----------------------|---------------|
| S33A | Alloy 825 | 33 | 600 | 1 | В | 5.5 | 3.3 | M25 |
| S55A | Alloy 825 | 55 | 600 | 1 | В | 6.4 | 8.4 | M25 |

^{*} For details on the different heating unit designs, refer to chapter MI heating Systems - MI heating Cables in the Databook (reference DOC2210)

Nickel plated brass glands are standard on all heating units. Other materials are possible, contact nVent for more information.

Delivery length of bulk cable on coil depends on type of resistance and is limited by max. coil length as indicated in the table on top. Factory terminated elements are limited by a max. weight of 50 kg, however to ensure practical and safe on-site handling, it is strongly recommended to limit element lengths to 25 - 30 kg. Not all resistances are standard items and as such may not be in stock. Contact nVent to confirm lead time. nVent requires the use of a 30 mA residual current device to provide maximum safety and protection from fire.

Where design results in higher leakage current, the preferred trip level for adjustable devices is 30 mA above any inherent capacitive leakage characteristic of the heater as specified by the trace heater supplier or alternatively, the next common available trip level for non adjustable devices, with a maximum of 300 mA. All safety aspects need to be proven.

Also refer to the components section for more details on heating units, accessories and nomenclatures.

MI heating cable sheath corrosion resistance and temperature data

| Sheath Material | Description | Sulphuric Acid | Hydrochloric Acid | Hydrofluoric Acid | Phosphoric Acid | Nitric Acid | Organic Acid | Alkalis | Sea Water | Chloride |
|---------------------------|--|----------------|-------------------|-------------------|-----------------|-------------|--------------|---------|-----------|----------|
| Inconel 600 DIN 2.4816 | High nickel, high chromium content inconel alloy 600 | Χ | X | А | X | X | GE | GE | А | GE |

Note: NR - Not recommended, A - Acceptable, GE - Good to excellent, X - Check for specific data Temperature limitation based on construction of heating element.

Corrosion resistance data is dependent on temperature and concentration.

APPROVALS

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

T6 ... T1

nVent RAYCHEM heat-tracing products are approved for the listed temperature classifications by using the principles of stabilized design. Use TraceCalc design software or contact nVent.

Product certification















More details about product certification, approvals and conditions of safe use are available in the Mineral Insulated (MI) series heating systems installation manual at www.nVent.com/RAYCHEM.

- Due to the sensitivity & craftsmanship required to assemble an MI heating unit, they are usually purchased as factory terminated units. Refer to the "MI Heating Systems Nomenclature" datasheet for more information on the ordering references for complete units or contact your local nVent representative.
 - It is strongly recommended to use nVent design software such as TraceCalc Pro to validate the design and ordering string.
- To purchase MI heating cables in bulk, refer to the tables with the cable references on page 52 in this document.














Mineral insulated (MI) Alloy 825 heating cable 🖾

PRODUCT OVERVIEW

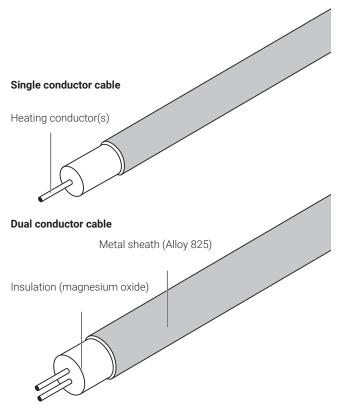

nVent RAYCHEM HAx mineral insulated (MI) Alloy 825 series heating cables are suitable for use in hazardous areas. They have been designed for use in freeze protection and temperature maintenance applications of pipes, tanks and other equipment.

MI heating cables of the HAx-series offer an ideal combination of ruggedness, high temperature withstand capability and corrosion resistance and can therefore be used for a wide variety of heat-tracing applications, in particular for applications with high power requirements and for temperatures exceeding the capabilities of polymer insulated (PI) series heating cables.

The heating cables can be used for exposure temperatures of up to 600°C and a typical power output of up to 270 W/m. Higher temperatures and power outputs can be achieved, contact nVent for assistance.

HAx mineral insulated (MI) heating cables are available as single and dual conductor construction and in a very wide range of resistances. The use of dual conductor heating cables can significantly reduce total installed cost and simplifies installation, in particular for small pipes and instrument tubing.

The heating cables are offered as bulk cable as well as factory terminated heating units employing brazing and laser welding technology. The offering is completed with a full range of components for installation, connection and splicing of the heating cables.

PRODUCT SPECIFICATIONS

| Technical Details | | | | | | | | |
|-------------------------------|-----------------------------|---|-------------------------------------|--|--|--|--|--|
| Cable sheath material | Alloy 825 | | | | | | | |
| Conductor material | Various alloys and | Various alloys and copper | | | | | | |
| Max. exposure temperature | 550°C (brazed heat | 550°C (brazed heating units) | | | | | | |
| | ` | 600°C* (laser welded heating units) *Higher temperatures can be realized, contact nVent | | | | | | |
| Min. installation temperature | -60°C | -60°C | | | | | | |
| Min. bending radius | 6 x OD (cable diam | eter) at -60°C | | | | | | |
| Max. supply voltage and power | Voltage (U ₀ /U) | Max. power output* | Heating cable type | | | | | |
| | 600/600 Vac | 210 W/m | HAx1N Single conductor cable, 600 V | | | | | |
| | 300/300 Vac | 200 W/m | HAx2M Dual conductor cable, 300 V | | | | | |
| | 600/600 Vac | 270 W/m | HAx2N Dual conductor cable, 600 V | | | | | |
| | | *typical value, depend | ding on application | | | | | |
| Earth leakage | 3 mA /100 m (nom | inal at 20°C, 230 Vac, 50 | - 60 Hz) | | | | | |
| Min. cable spacing | 25 mm for hazardo | us areas | | | | | | |
| | | | | | | | | |

Table 1 MI series heating cables HAx2M (Dual conductor cable, 300 V)

| Order Reference | Nominal Resistance (Ω/km @ 20°C) | Outer Diameter (mm) | Temp. Coefficient (x 10 ⁻³ /K) | Max. Coil Length [m] | Nom. Weight (kg/km) | Part Number PN |
|--------------------|--|---------------------|--|-------------------------|------------------------|-------------------|
| HAF2M59K | 59000 | 4.4 | 0.09 | 387 | 73 | 32SF1180 |
| HAF2M36K | 36000 | 4 | 0.09 | 483 | 60 | 32SF1110 |
| HAF2M29.5K | 29500 | 4.1 | 0.09 | 459 | 63 | 32SF2900 |
| HAF2M24.5K | 24500 | 4 | 0.09 | 477 | 61 | 32SF2750 |
| HAA2M19.7K | 19700 | 4.1 | 0.09 | 459 | 63 | 32SA2600 |
| HAA2M13.2K | 13200 | 3.7 | 0.09 | 554 | 54 | 32SA2400 |
| HAA2M10.4K | 10400 | 4.4 | 0.09 | 389 | 74 | 32SA2318 |
| HAA2M9000 | 9000 | 3.9 | 0.09 | 505 | 60 | 32SA2275 |
| HAA2M6600 | 6600 | 4.3 | 0.09 | 414 | 73 | 32SA2200 |
| HAA2M5600 | 5600 | 4.2 | 0.09 | 425 | 72 | 32SA2170 |
| HAB2M3750 | 3750 | 4.4 | 0.04 | 390 | 76 | 32SB2114 |
| HAB2M3000 | 3000 | 4.1 | 0.04 | 451 | 67 | 32SB3914 |
| HAB2M2300 | 2300 | 4.3 | 0.04 | 411 | 74 | 32SB3700 |
| HAQ2M1560 | 1560 | 4.5 | 0.5 | 376 | 78 | 32SQ3472 |
| HAQ2M1240 | 1240 | 4.6 | 0.5 | 352 | 82 | 32SQ3374 |
| HAQ2M965 | 965 | 4.5 | 0.5 | 368 | 79 | 32SQ3293 |
| HAQ2M660 | 660 | 4.1 | 0.5 | 457 | 66 | 32SQ3200 |
| HAQ2M495 | 495 | 4.3 | 0.5 | 420 | 73 | 32SQ3150 |
| HAQ2M330 | 330 | 4.7 | 0.5 | 348 | 89 | 32SQ3100 |
| HAP2M240 | 240 | 4.4 | 1.3 | 391 | 78 | 32SP4734 |
| HAP2M190 | 190 | 4.5 | 1.3 | 375 | 82 | 32SP4583 |
| HAP2M150 | 150 | 4.8 | 1.3 | 337 | 62 | 32SP4458 |
| HAC2M105 | 105 | 4.7 | 3.9 | 349 | 85 | 32SC4324 |

Table 2 MI series heating cables HAx2N (Dual conductor cable, 600 V)

| Order Reference | Nominal Resistance (Ω/km @ 20°C) | Outer Diameter (mm) | Temp. Coefficient (x 10 ⁻³ /K) | Max. Coil Length [m] | Nom. Weight (kg/km) | Part Number PN |
|--------------------|--|------------------------|---|-------------------------|------------------------|-------------------|
| HAF2N36K | 36000 | 4.9 | 0.09 | 312 | 91 | 62SF1110 |
| HAF2N29.5K | 29500 | 4.9 | 0.09 | 312 | 91 | 62SF2900 |
| HAF2N24.5K | 24500 | 5.2 | 0.09 | 279 | 103 | 62SF2750 |
| HAF2N19.7K | 19700 | 5.8 | 0.09 | 222 | 128 | 62SF2600 |
| HAA2N13.6K | 13600 | 6.1 | 0.09 | 204 | 140 | 62SA2414 |
| HAA2N9000 | 9000 | 5.7 | 0.09 | 232 | 125 | 62SA2275 |
| HAF2N6600 | 6600 | 6.2 | 0.09 | 196 | 149 | 62SF2200 |
| HAA2N5600 | 5600 | 6.1 | 0.09 | 205 | 143 | 62SA2170 |
| HAT2N3750 | 3750 | 5.5 | 0.18 | 254 | 113 | 62ST2115 |
| HAB2N3000 | 3000 | 5.9 | 0.04 | 219 | 132 | 62SB3914 |
| HAB2N2300 | 2300 | 6.7 | 0.04 | 168 | 174 | 62SB3700 |
| HAT2N1670 | 1670 | 5.5 | 0.18 | 255 | 115 | 62ST3505 |
| HAQ2N1240 | 1240 | 5.5 | 0.5 | 254 | 113 | 62SQ3374 |
| HAQ2N940 | 940 | 5.6 | 0.5 | 239 | 121 | 62SQ3286 |
| HAQ2N660 | 660 | 5.8 | 0.5 | 229 | 128 | 62SQ3200 |
| HAQ2N495 | 495 | 5.8 | 0.5 | 229 | 128 | 62SQ3150 |
| HAQ2N330 | 330 | 6.5 | 0.5 | 179 | 165 | 62SQ3100 |
| HAP2N255 | 255 | 6.4 | 1.3 | 188 | 155 | 62SP4775 |
| HAP2N185 | 185 | 6.7 | 1.3 | 171 | 173 | 62SP4561 |
| HAP2N130 | 130 | 7 | 1.3 | 154 | 194 | 62SP4402 |
| HAP2N92 | 92 | 7.4 | 1.3 | 139 | 219 | 62SP4281 |
| HAC2N66 | 66 | 7.2 | 3.9 | 145 | 201 | 62SC4200 |











| Order Reference | Nominal Resistance (Ω/km @ 20°C) | Outer Diameter (mm) | Temp. Coefficient (x 10 ⁻³ /K) | Max. Coil Length [m] | Nom. Weight (kg/km) | Part Number PN |
|--------------------|--|---------------------|---|-------------------------|------------------------|-------------------|
| HAC2N43 | 43 | 7.7 | 3.9 | 128 | 233 | 62SC4130 |
| HAC2N27 | 27 | 8.4 | 3.9 | 100 | 279 | 62SC5818 |
| HAC2N17 | 17 | 9.2 | 3.9 | 90 | 343 | 62SC5516 |
| HAC2N10.5 | 10.5 | 10.2 | 3.9 | 74 | 432 | 62SC5324 |
| HAC2N6.6 | 6.6 | 12.6 | 3.9 | 48 | 653 | 62SC5204 |
| HAC2N4.3 | 4.3 | 13.8 | 3.9 | 143 | 769 | 62SC5128 |

Table 3 MI series heating cables HAx1N (Single conductor cable, 600 V)

| Order Reference | Nominal Resistance (Ω/km @ 20°C) | Outer Diameter (mm) | Temp. Coefficient (x 10 ⁻³ /K) | Max. Coil Length [m] | Nom. Weight (kg/km) | Part Number PN |
|--------------------|--|---------------------|---|-------------------------|------------------------|-------------------|
| HAA1N6565 | 6565 | 4.3 | 0.085 | 406 | 75 | 61SA2200 |
| HAA1N5250 | 5250 | 4.1 | 0.085 | 443 | 66 | 61SA2160 |
| HAA1N4300 | 4300 | 4.1 | 0.085 | 460 | 63 | 61SA2130 |
| HAA1N3300 | 3300 | 4.1 | 0.085 | 460 | 64 | 61SA2100 |
| HAA1N2800 | 2800 | 4.3 | 0.085 | 408 | 72 | 61SA3850 |
| HAA1N2300 | 2300 | 4.1 | 0.085 | 462 | 64 | 61SA3700 |
| HAA1N1640 | 1640 | 4.3 | 0.085 | 410 | 73 | 61SA3500 |
| HAT1N920 | 920 | 4.3 | 0.18 | 408 | 72 | 61ST3280 |
| HAB1N660 | 660 | 4.6 | 0.04 | 365 | 82 | 61SB3200 |
| HAB1N500 | 500 | 4.3 | 0.04 | 412 | 76 | 61SB3150 |
| HAQ1N390 | 390 | 4.4 | 0.5 | 384 | 75 | 61SQ3118 |
| HAQ1N240 | 240 | 4.3 | 0.5 | 410 | 72 | 61SQ4732 |
| HAQ1N190 | 190 | 4.4 | 0.5 | 399 | 75 | 61SQ4581 |
| HAP1N155 | 155 | 4.3 | 1.3 | 408 | 72 | 61SP4467 |
| HAP1N120 | 120 | 4.4 | 1.3 | 394 | 75 | 61SP4366 |
| HAP1N95 | 95 | 4.5 | 1.3 | 377 | 79 | 61SP4290 |
| HAP1N76 | 76 | 4.4 | 1.3 | 391 | 78 | 61SP4231 |
| HAP1N60 | 60 | 4.3 | 1.3 | 411 | 75 | 61SP4183 |
| HAP1N48 | 48 | 4.3 | 1.3 | 412 | 76 | 61SP4145 |
| HAP1N37 | 37 | 4.7 | 1.3 | 345 | 91 | 61SP4113 |
| HAC1N21.3 | 21.3 | 4.7 | 3.9 | 338 | 89 | 61SC5651 |
| HAC1N13.5 | 13.5 | 4.9 | 3.9 | 326 | 95 | 61SC5409 |
| HAC1N8.5 | 8.5 | 5.5 | 3.9 | 259 | 124 | 61SC5258 |
| HAC1N5.3 | 5.3 | 6.8 | 3.9 | 166 | 192 | 61SC5162 |
| HAC1N3.3 | 3.3 | 6.4 | 3.9 | 171 | 185 | 61SC5102 |
| HAC1N2 | 2 | 8.1 | 3.9 | 119 | 294 | 61SC6640 |

Table 4 Recommended cold lead cables for HAx MI series heating cables

| Cold Lead Code | Sheath Material | Current Rating (A) | Voltage Rating (Vac) | No of Conductors | Design* | Cable O.D. (mm) | Pigtail Size (mm²) | Gland Size |
|-------------------|--------------------|-----------------------|-------------------------|---------------------|---------|--------------------|-----------------------|---------------|
| S33A | Alloy 825 | 33 | 600 | 1 | В | 5.5 | 3.3 | M25 |
| S55A | Alloy 825 | 55 | 600 | 1 | В | 6.4 | 8.4 | M25 |
| S76A | Alloy 825 | 76 | 600 | 1 | В | 8.1 | 13.3 | M25 |
| S123A | Alloy 825 | 123 | 600 | 1 | В | 10.2 | 21.1 | M25 |
| LS28A | Alloy 825 | 28 | 300 | 2 | D or E | 8.1 | 2.1 | M25 |
| S28A | Alloy 825 | 28 | 600 | 2 | D or E | 9 | 2.1 | M25 |
| S41A | Alloy 825 | 41 | 600 | 2 | D or E | 10.2 | 5.3 | M25 |
| S57A | Alloy 825 | 57 | 600 | 2 | D or E | 12.6 | 8.4 | M25 |
| S77A | Alloy 825 | 77 | 600 | 2 | D or E | 13.8 | 13.3 | M25 |

^{*} For details on the different heating unit designs, refer to the chapter MI Heating Systems - MI Heating Cables in the Databook.

Cold leads attached to HAx heating cables are provided with an Alloy 825 outer sheath. As the cold lead is an exposed component, not protected by insulation, it can be subject to extremely variable corrosive environments. The Alloy 825 sheath provides enhanced life expectancy with a superior level of corrosion protection against a wide range of exposure conditions.

By default, all cold leads are supplied with nickel plated brass M25 glands intended for use with a standardized range of nVent RAYCHEM MI junction boxes which include an integral earth plate. Other gland materials are possible, contact nVent for more information. Delivery length of bulk cable on coil depends on type of resistance and is limited by max. coil length as indicated in the table on top. Factory terminated elements are limited by a max. weight of 50 kg, however to ensure practical and safe on-site handling, it is strongly recommended to limit element lengths to 25 - 30 kg. Not all resistances are standard items and as such may not be in stock. Contact nVent to confirm lead time. nVent requires the use of a 30 mA residual current device to provide maximum safety and protection from fire.

Where design results in higher leakage current, the preferred trip level for adjustable devices is 30 mA above any inherent capacitive leakage characteristic of the heater as specified by the trace heater supplier or alternatively, the next common available trip level for non adjustable devices, with a maximum of 300 mA. All safety aspects need to be proven.

Table 5 Chemical resistance

| Alloy | Maximum Cable Sheath Temp (°C) | Description | com | positi | hemic on, elemei | | High tempe resist (+540 | | Cori | rosion | resis | tance | | | | | | |
|---|--------------------------------------|--|------------------|--------|------------------------|---------------|----------------------------------|---------------|---------------|-------------------|-------------------|-----------------|-------------|--------------|---------|-------|----------|-------------------|
| INCOLOY Alloy 825 nickel-iron- chromium | 550°C* | Excellent resistance to a wide variety of corrosives. Resists | Nickel (+Cobalt) | Iron | Chromium | Other | Oxidation | Carburization | Sulfuric acid | Hydrochloric acid | Hydrofluoric acid | Phosphoric acid | Nitric acid | Organic acid | Alkalis | Salts | Seawater | Chloride cracking |
| | | pitting and intergranular type corrosion, reducing acids and oxidizing chemicals | 42 | 30 | 21.5 | Mo 3.0 Cu 2.2 | G-E | G-E | G-E | G-E | G-E | G-E | G-E | G-E | G-E | G-E | G-E | G-E |

From Huntington Alloys Publication 78-348-2

Note: NR - Not recommended, A - Acceptable, GE - Good to excellent, X - Check for specific data

* Temperature limitation based on construction of heating element. Corrosion resistance data is dependent on temperature and concentration.

APPROVALS

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

T6 ... T1

nVent RAYCHEM heat-tracing products are approved for the listed temperature classifications by using the principles of stabilized design. Use TraceCalc design software or contact nVent.

Product certification















More details about product certification, approvals and conditions of safe use are available in the Mineral Insulated (MI) series heating systems installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

- · Due to the sensitivity & craftsmanship required to assemble an MI heating unit, they are usually purchased as factory terminated units. Refer to the "MI Heating Systems Nomenclature" Datasheet for more information on the ordering references for complete units or contact your local nVent representative.
 - It is strongly recommended to use nVent design software such as TraceCalc Pro to validate the design and ordering string.
- To purchase MI heating cables in bulk, refer to the tables with the cable references on page 2-3 in this document.










MI heating cables ⟨€x⟩

MI Heating Systems Nomenclature

PRODUCT OVERVIEW

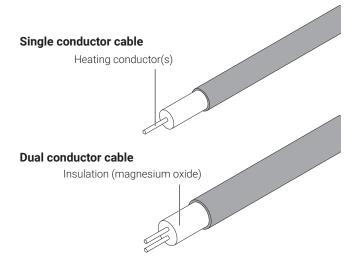

nVent RAYCHEM MI heating cables are available for a wide range of applications.

For more details about the different MI heating cable types, also refer to the product datasheets.

Various constructions of the MI bulk heating cables are available:

| HCC/HCH: | Copper sheathed MI heating cables |
|----------|--|
| HDF/HDC: | Cupro-nickel sheathed MI heating cables |
| HSQ: | Stainless steel sheathed MI heating cables |
| HAx: | Alloy 825 sheathed MI heating cables |
| HIQ: | Inconel sheathed MI heating cables |

MI bulk heating cables are supplied in a range of different constructions, the product references use the following nomenclature:

| Example: H | CHR1L2000-RD | |
|------------|---|---|
| Н | H denotes a heating cable | H =Heating Cable |
| С | Sheath material | C=Copper D=Cupro-Nickel S=Stainless steel A=Alloy 825 I=Inconel 600 |
| Н | Conductor material (examples) | C =Copper H =Copper Alloy and a variety of other metal alloys |
| R | Oversheath material (optional for copper cables only, oversheath colour is red) | R =LSZH |
| 1 | Number of conductors | 1 or 2 |
| L | Normal operating voltages | Refer to datasheets of individual heating cables |
| 2000 | Conductor resistance | in Ω/km - i.e. 2000=2000 Ω/km |

MI heating units

MI heating units consist of a heating cable, the hot-cold joint as well as the cold lead cables with an appropriate seal and gland. The connection and sealing of an MI heating unit is critical for a safe and reliable operation.

nVent strongly recommends the use of factory-terminated heating units, which guarantee a consistently high level of quality.

The stainless steel (HSQ), Inconel 600 (HIQ) and Alloy 825 (HAx) can be delivered with either brazed joints and/or end caps or laser welded joints and/or end caps. We recommend the use of laser welded joints and/or end caps if the load or exposure temperatures cause element temperatures above 550°C.

Lower temperatures can be fulfilled with brazed connections. (Alloy 825 heating cables or cold leads should not be used at temperatures between 650°C and 750°C).

When brazed connections are used, nVent offers heating units with Alloy 825 cold leads regardless of the sheath material used to obtain maximum corrosion resistance on the exposed parts. (except copper heating cables which are offered with a copper cold lead) Brazed heating units also come with an additional strain relief for bending protection on the heating cable side.

When laser welded connections are used, we offer either stainless steel cold leads when stainless steel heating cables have been selected or Alloy 825 cold leads if Inconel or Alloy 825 heating cables are the choice.


The standard gland material is nickel plated brass but they are also available in stainless steel. The gland size is M25 for all cold lead sizes.

Appropriate earthing of the heating units is realized through the glands and use of junction boxes with integral earth plate or metallic junction boxes. Consult our product literature for more information on our junction box offering with integral earth plates.


For use in hazardous areas, MI heating units need to be assembled by nVent or an authorized installer.

MI heating units are available in different configurations (unit types)


MI heating unit type B (single conductor)

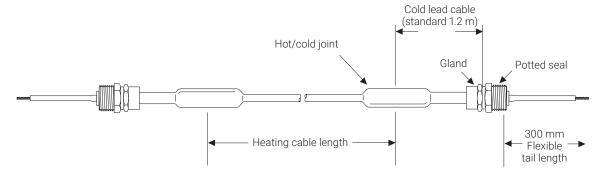

MI heating unit type D (dual conductor)

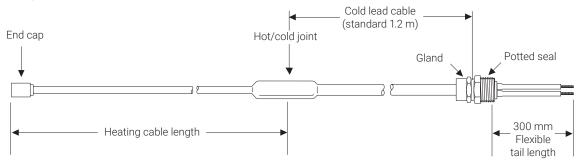

MI heating unit type E (dual conductor)

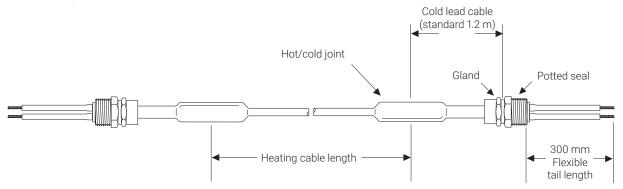






The cold lead length includes 300 mm long flexible tails. Glands are fitted with washers and locknuts. Other configurations available on request.

The order reference of MI heating units uses the following nomenclature

B/HSQ1M1000/43.0M/1217/230/1.2M/S33A/X/NPM25/EX

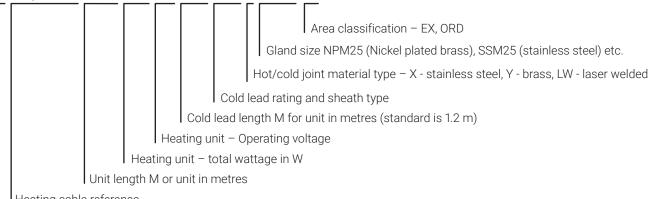

Heating cable reference

Heating cable unit type - Type B, D or E

When ordering, the complete order reference of the MI heating unit needs to be provided. For hazardous areas, information must also be provided about the T-rating and temperature data relevant to the application (max. sheath temperature data) to enable the correct representation of data on hazardous area tags attached to the completed heating unit in the factory.

Any missing detail may lead to potential delays in order processing.

Selection of MI cold leads

Standard cold leads consist of 1.2 m of mineral insulated cold lead cable and 300 mm of stranded flex tails. The glands are always M25 and the standard gland material nickel plated brass.

Earthing of the units is realized through the glands and use of junction boxes with earth plate or metallic junction boxes. The cold leads do not have an integrated earth wire. (alternatively earth lugs can also be used if the junction boxes are in plastic without earth plate - contact nVent for more information) Optionally stainless steel glands or different cold lead lengths are also available but will increase lead time. Contact nVent for more information for a specific request.

The reference of a cold lead always consists of one or 2 letters indicating the sheath material and a number followed by 'A' indicating the maximum continuous current rating.

And example: S 33A - Cold lead rated up to 33A continuous Cold lead sheathed material Alloy 825

nVent RAYCHEM MI cold lead cables are available in different sheath materials:

- · S...A: Alloy 825 sheathed cold lead
- SC...A: Stainless steel sheathed cold lead
- · C...A: Copper sheathed cold lead

For selection of the MI cold lead, the environmental exposure (chemicals etc...), as well as the current rating need to be considered:

- nVent typically recommends using the same or superior sheath materials for the cold lead as used for the heating cable. When a unit is brazed, nVent default cold lead is in Alloy 825 to offer maximum corrosion protection on the most exposed part. (except for copper heating units for which the cold leads are also copper sheathed or overjacketed) When a unit is laser welded (available for stainless steel, Alloy 825 and Inconel sheathed cables), nVent will offer an Alloy 825 cold lead on both Inconel and Alloy 825 heating units and a stainless steel cold lead on a stainless steel unit.
- · Cold leads are normally selected based on the operating current of the heating unit at maintain temperature. For higher maintain temperatures, the current can be significantly higher during the transitional start-up phase. If the application involves more frequent heat-up from lower temperatures, we recommend selecting the cold lead size based on the start-up

The option for laser welded units is not available for MI heating cables with a copper or cupro-nickel sheath.

Cold lead selection table

| Number Of Conductors | Cross Section of Pigtail (mm²) | Cold Lead Order Reference | Current Rating (A) | Connection Method (Lw: Laser Welded / B: Brazed) | Outer Diameter (mm) | Sheath Material | Gland Size |
|-------------------------|--------------------------------|------------------------------|--------------------|--|---------------------|--|------------|
| 1 | 3.3 | C33A SC33A S33A | 33 | B LW B or LW | 5.5 | Copper Stainless steel Alloy 825 | M25 |
| | 8.4 | C55A SC55A S55A | 55 | B LW B or LW | 6.4 | Copper Stainless steel Alloy 825 | |
| | 13.3 | C76A S76A | 76 | B B or LW | 8.1 | Copper Alloy 825 | |
| | 21.2 | C123A S123A | 123 | B B | 10.2 | Copper Alloy 825 | |
| 2 | 2.1 | LS28A** S28A | 28 | B or LW B or LW | 8.1 9 | Alloy 825 | M25 |
| | 5.3 | S41A | 41 | В | 10.2 | Alloy 825 | |
| | 8.4 | S57A | 57 | В | 12.6 | Alloy 825 | |
| | 13.3 | S77A | 77 | В | 13.8 | Alloy 825 | |

** Cold lead is limited up to 300 Vac
For over jacketed cables (copper sheathed only), add 2 mm to the outer diameter
Nickel plated brass glands are standard on all heating units. Optionally glands in stainless steel are also available.














Anti-icing system for offshore walkways and deck surfaces

PRODUCT OVERVIEW

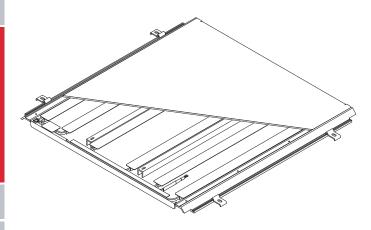

The nVent RAYCHEM ArcticStep is a modular panel system for anti-icing or de-icing of walkways and deck surfaces on offshore platforms and vessels. It is designed for use in hazardous area installations in oil & gas and marine industries.

The system consists of a robust metallic top plate, an embedded nVent RAYCHEM self-regulating heating cable, fiber reinforced polymer supports, protective anti-slip coating, and adjustable fixations.

This hybrid light weight construction allows for fast and easy installation, minimizes heat loss and energy consumption, provides galvanic and thermal insulation from the deck surface, and ensures long life operation in harsh corrosive environments. Integrated cable channels protect the power supply cables from any mechanical damage.

PRODUCT SPECIFICATIONS


| Surface type | Offshore and onshore structures, on top of steel decks, grating (special fasteners and wind barrier are required), painted or unpainted. |
|---------------------------|---|
| Chemical resistance | Designed to withstand salt and corrosive atmosphere, sea water, cleaning solvents, oil. Protective Primer coating (black) + top layer antislip coating (yellow, RAL 1021) |
| Supply voltage | 230 Vac |
| Impact load | 250 kg/m² |
| Materials of construction | Top plate: Aluminium (4 mm) Pultrusions + supports: fiber reinforced polymer (FRP) |
| Cold lead connection | Power cable in oil resistant TPE/PUR, size 1.5 mm², standard length: 10 m. Approved for electrical installation in offshore and marine |









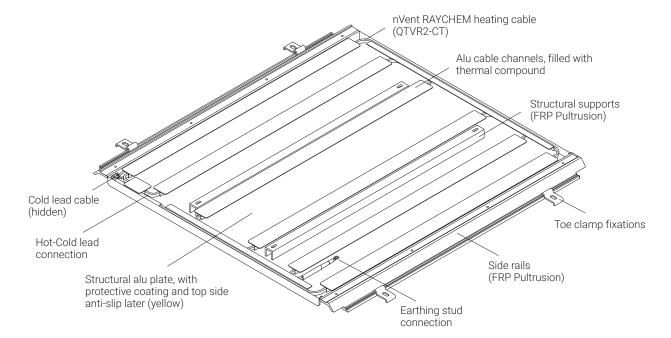

Dimensions (*)


| 3 Types | Straight | Straight long | Corner |
|-------------|-----------|---------------|-----------|
| Size (m) | 1.0 * 1.0 | 2.0 * 1.0 | 1.0 * 1.0 |
| Height (mm) | 35 | 35 | 35 |
| Weight (kg) | <20 | <40 | <20 |

Thermal output rating (*)


| 3 Versions | RAS-350 | RAS-500 | RAS-650 |
|----------------------|---------|---------|---------|
| Minimum power output | 350 | 500 | 650 |
| @ -20°C (W/m²) | | | |

(*) Customized sizes and power outputs available, up to 1800 W/m². Contact your nVent sales representative.

Size customization possible

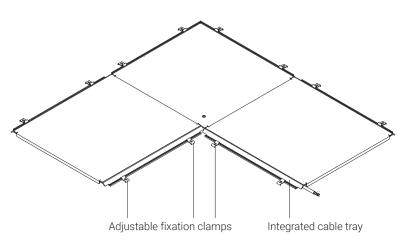

nVent RAYCHEM ArcticStep nominal power output at 230 Vac (W/m²)

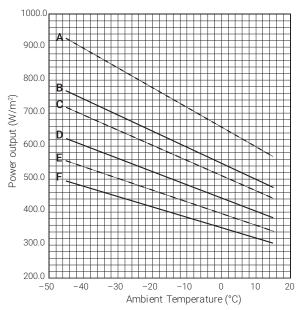

- **A** = RAS 650 Light wind
- **D** = RAS 500 No wind
- **B** = RAS 650 No wind
- E = RAS 350 Light wind
- C = RAS 500 Light wind
- **F** = RAS 350 No wind







Installation instruction

Complete panel wiring information and schematics are provided with the product. All electrical installations must be carried out by an approved electrician in compliance with local electrical requirements and norms.

Maximum installed surface area (in m²) per circuit based on type 'C' circuit breakers

| Electrical protection sizing | Start-up temperature | RAS-350 | RAS-500 | RAS-650 |
|------------------------------|----------------------|---------|---------|---------|
| 16 A | -20°C | 7 | 5 | 3 |
| | -10°C | 8 | 5 | 3 |
| | +5°C | 9 | 6 | 4 |
| 25 A | -20°C | 12 | 8 | 6 |
| | -10°C | 12 | 9 | 6 |
| | +5°C | 14 | 11 | 7 |
| 32 A | -20°C | 15 | 11 | 8 |
| | -10°C | 16 | 12 | 8 |
| | +5°C | 18 | 14 | 10 |

The above numbers are for estimation only. For more information contact your local nVent sales representative. nVent requires the use of a 30 mA residual current device to provide maximum safety and protection from fire. Where design results in higher leakage current, the preferred trip level for adjustable devices is 30 mA above any inherent capacitive leakage characteristic of the heater as specified by the trace heater supplier or alternatively, the next common available trip level for non-adjustable devices, with a maximum of 300 mA. All safety aspects need to be proven.

APPROVALS

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

Product certification

ArcticStep:



BTV and QTVR heating system:





More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

| Name | Description | PN code |
|------------------|---|-----------|
| RAS-350-S-1.0-10 | ArcticStep, 350 W/m², Straight, 1 m long | RAS-00001 |
| RAS-350-S-2.0-10 | ArcticStep, 350 W/m², Straight, 2 m long | RAS-00002 |
| RAS-350-C-1.0-10 | ArcticStep, 350 W/m ² , Corner, 1 m long | RAS-00003 |
| RAS-500-S-1.0-10 | ArcticStep, 500 W/m², Straight, 1 m long | RAS-00004 |
| RAS-500-S-2.0-10 | ArcticStep, 500 W/m², Straight, 2 m long | RAS-00005 |
| RAS-500-C-1.0-10 | ArcticStep, 500 W/m², Corner, 1 m long | RAS-00006 |
| RAS-650-S-1.0-10 | ArcticStep, 650 W/m², Straight, 1 m long | RAS-00007 |
| RAS-650-S-2.0-10 | ArcticStep, 650 W/m², Straight, 2 m long | RAS-00008 |
| RAS-650-C-1.0-10 | ArcticStep, 650 W/m ² , Corner, 1 m long | RAS-00009 |

RAS-xxx-Y-x.x-yy: RAS = RAYCHEM ArcticStep / xxx = Power W/m2 / Y: S = straight, C = corner / x.x-yy = length panel-length cold lead cable

Accessories


| Name | PN code |
|--------------------|-------------|
| RAS-TOE.CLAMP-15PC | RAS-ACC0001 |
| RAS-CABLE.COVER-2M | RAS-ACC0002 |
| RAS-GRAT.MAT-10M | RAS-ACC0003 |







Component overview of self-regulating and power-limiting heating cable system

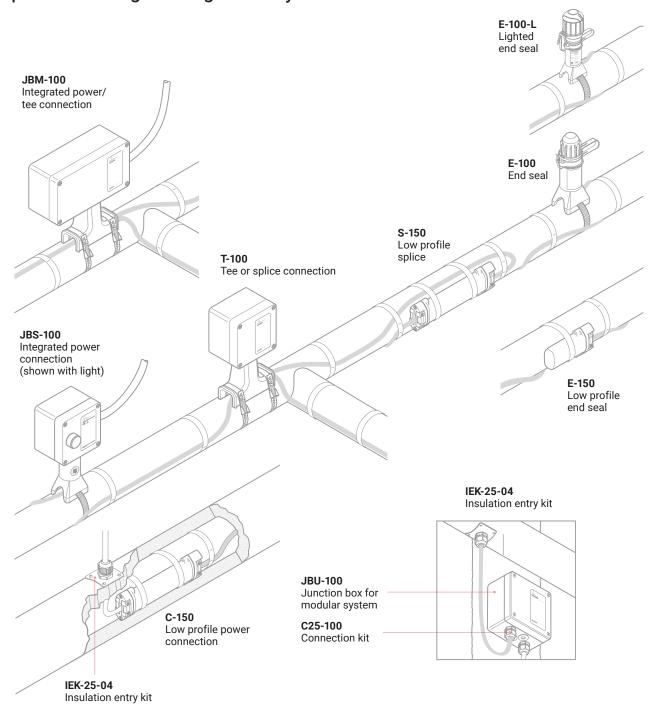


Note: S-150, E-150 & C-150 Not available for VPL



Single-Entry power connection with junction box (Ex)

PRODUCT OVERVIEW

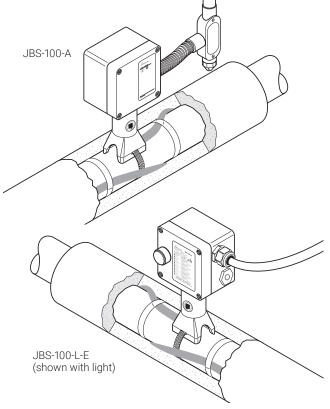

The nVent RAYCHEM JBS-100 kit is designed to connect power to a single nVent RAYCHEM BTV, QTVR, XTVR, HTV or VPL industrial parallel heating cable.

The JBS-100 integrates the functions of both connection kits and insulation entries. The rugged stand protects the heating cable and allows for up to 100 mm (4") of thermal insulation.

The core sealing boot does not require a heat gun or torch for the installation (no hot work permit necessary). The non-curing sealant (silicone free) in the boot allows easy installation and facilitates maintenance.

Spring-type terminals provide fast installation and safe, reliable, maintenance-free operation. This connection kit significantly reduces installation time. The kit is offered in three basic versions, customised for local installation practices. All kits are also available as a lighted version. These include a unique light module with a superbright LED that simply plugs into the terminals, and a lens in the lid. This provides indication that power is available in the box. There is also a connection kit with drain plug available.

Description

| JBS-100-A JBS-100-L-A | JBS-100-E JBS-100-L-E JBS-100-D-E | JBS-100-EP JBS-100-L-EP |
|---|---|--|
| This connection system is certified for use in North America and has one throughhole for use with ¾" conduit. | This connection system is certified for use in IEC regions and provides two M25 threaded entries, one stopping plug, and one plastic power cable gland. | This connection system is certified for use in IEC regions and provides two M25 threaded entries, an earthing plate, and an external earthing stud. It is designed for use with armoured cables. |







| JBS-100-A JBS-100-L-A | JBS-100-E JBS-100-L-E JBS-100-D-E | JBS-100-EP JBS-100-L-EP |
|--------------------------------|--|--|
| 1 junction box with terminals | 1 junction box with terminals | 1 junction box with terminals, earth plate, and stud |
| 1 light module (for -L only) | 1 light module (for -L only) | 1 light module (for -L only) |
| 1 stand | 1 stand | 1 stand |
| 1 core sealer | 1 core sealer | 1 core sealer |
| 1 green/yellow earthing sleeve | 1 green/yellow earthing sleeve | 1 green/yellow earthing sleeve |
| 1 polywater sachet | 1 M25 gland for power cable 8-15 mm in diameter (temperature range -55°C / 70°C) | 1 M25 stopping plug |
| 1 cable tie | 1 M25 stopping plug | 1 polywater sachet |
| | 1 polywater sachet | 1 cable tie |
| | 1 cable tie | |
| | 1 ATEX/IECEx Certified drainplug (for JBS-100-D-E only) | |

PRODUCT SPECIFICATIONS

Dimensions (nominal)

| JBS-100-A JBS-100-L-A | JBS-100-E JBS-100-L-E JBS-100-D-E | JBS-100-EP JBS-100-L-EP |
|--------------------------|---|----------------------------|
| 3.6" | 122 mm | 122 mm — 91 mm |
| 4.8" | | 120 mm |















| | JBS-100-A JBS-100-L-A | JBS-100-E JBS-100-L-E JBS-100-D-E | JBS-100-EP JBS-100-L-EP |
|--|--|--|---|
| Heating cable capability | BTV-CR, BTV-CT, QTVR-CT, XTV | R-CT, HTV-CT, VPL-CT | |
| Ingress protection | IP66 | IP66 | IP66 |
| Entries | 1 x ³ / ₄ " | 2 x M25 | 2 x M25 |
| Ambient temperature range | -55°C to +56°C (JBS-100-A) -40°C to +40°C (JBS-100-L-A) | -55°C to +56°C* (JBS-100-E and JBS-100-D-E) -40°C to +40°C (JBS-100-L-E) | -55°C to +56°C* (JBS-100-EP) -40°C to +40°C (JBS-100-L-EP) |
| | * Extra conditions for safe use apply at ambient temperatures >40°C. Temperature resistant power cable and metal glands must be used. Please refer to the certificate or installation instructions for full details. | | |
| Max. pipe temperature | Refer to heating cable specificat | ion | |
| Terminals | Spring-type terminals 2 line, 1 ground | Spring-type terminals 1 phase, 1 neutral, 1 earth | Spring-type terminals 1 phase, 1 neutral, 1 earth |
| Max. conductor size | 8 AWG stranded | 10 mm ² stranded, 10 mm ² solid | 10 mm² stranded, 10 mm² solid |
| Max. operating voltage | 480 Vac* | 480 Vac* | 480 Vac* |
| | * JBS-100-L-E, JBS-100-L-EP and JBS-100-L-A are limited to 277 Vac. Extra conditions for safe use apply for voltages higher than 277 Vac. Please refer to the certificate or installation instructions for full details. | | |
| Max. continuous operating current (****) | 53 A | 53 A | 53 A |

^(***) For pipe temperature >150°C and <260°C and XTVR or HTV heating cables, the maximum operating current shall be reduced to maximum 20 A.

Materials of construction

| Enclosure, lid, and stand | Electrostatic charge-resistant glass-filled engineered polymer, black | Electrostatic charge-resistant glass-filled engineered polymer, black | Electrostatic charge-resistant glass-filled engineered polymer, black |
|---------------------------|---|---|---|
| Lid screws | Stainless steel | Stainless steel | Stainless steel |
| Lid gasket | Silicone rubber | Silicone rubber | Silicone rubber |
| Earth continuity plate | N/A | N/A | Steel, zinc plated, and blue chromated |

Optional LED indicator light

| Colour | Red | Green | Green |
|-------------------|-------------|-------------|-------------|
| Voltage rating | 100-277 Vac | 100-277 Vac | 100-277 Vac |
| Power consumption | < 1 W | < 1 W | < 1 W |

APPROVALS

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust) (and Class I Div 2).

Temperature classification

Temperature classification is defined by the complete system.

Product certification











For certifications in other regions (FM, CSA, IEx etc.), please refer to the installation manual.

More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

Power connection

| Part Description | JBS-100-A | JBS-100-E | JBS-100-EP |
|------------------|---------------------|---------------------|---------------------|
| PN (Weight) | 085947-000 (2.5 lb) | 829939-000 (1.2 kg) | 158251-000 (1.3 kg) |

Power connection with light

| Part Description | JBS-100-L-A | JBS-100-L-E | JBS-100-L-EP |
|------------------|---------------------|---------------------|---------------------|
| PN (Weight) | 944699-000 (3.5 lb) | 054363-000 (1.6 kg) | 075249-000 (1.7 kg) |

Power connection with drain plug

| Part Description | JBS-100-D-E | |
|------------------|----------------------|--|
| PN (Weight) | 1244-021057 (1.4 kg) | |

Accessories

| Conduit Drain 3/4" | Prevents condensate from collecting in the box | |
|-----------------------------------|---|--|
| Catalog number | JB-DRAIN-PLUG-3/4IN | |
| Part Number | 278621-000 | |
| Weight | 0.074 lb / 36 g | |
| Junction box standoff | For insulation thickness >100 mm & ≤150 mm * | |
| Catalog number | JBM-100-STANDOFF | |
| Part Number | P000003408 | |
| Weight | 0.279 lb / 135 g | |
| * Consider extra pipe strap lengt | h 6-9" (150-225 mm) for attachment | |
| Small pipe adapter | Required for stand on pipes ≤ 1" | |
| Catalog number | JBM-SPA | |
| Part Number | E90515-000 | |
| Weight | 0.408 lb / 185 g (Bag of 5 adaptors) | |
| Glands for power cables | Hazardous area approved gland for cables 8-15 mm (temperature range −55°C/70°C) | |
| Catalog number | GL-55-M25 | |
| Part Number | 1244-019083 | |
| Weight | 0.016 kg | |
| Glands for power cables | Hazardous area approved gland for cables 8-17.5 mm (temperature range −20°C/70°C) | |
| Catalog number | GL-36-M25 | |
| Part Number | 1244-019082 | |
| Weight | 0.016 kg | |

^(**) Localized versions may exist with limited approvals and different part numbers. Contact your local sales representative.














Multiple-Entry Power/Tee Connection with Junction Box €x

PRODUCT OVERVIEW

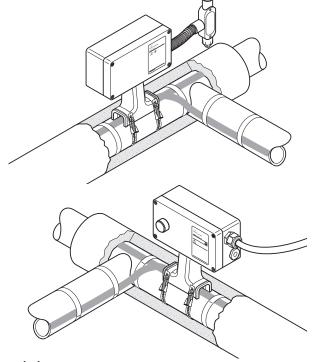

The nVent RAYCHEM JBM-100 kit is designed to connect power to up to three nVent RAYCHEM BTV, QTVR, XTVR, HTV, or VPL industrial parallel heating cables.

The JBM-100 integrates the functions of both connection kits and insulation entries. The rugged stand protects the heating cable and allows for up to 100 mm (4") of thermal insulation.

The core sealing boot does not require a heat gun or torch for the installation (no hot work permit necessary). The non-curing sealant (silicone free) in the boot allows easy installation and facilitates maintenance.

Spring-type terminals provide fast installation and safe, reliable, maintenance-free operation. This connection kit significantly reduces installation time.

The kit is offered in three basic versions, customised for local installation practices. All kits are also available as a lighted version. These include a unique light module with a superbright LED that simply plugs into the terminals, and a lens in the lid. This provides indication that power is available in the box. There is also a connection kit with drain plug available.

Description

JBM-100-A JBM-100-L-A

This connection system is certified for use in North America and has one ¾" through holes for use with ¾" conduit. One stopping plug is supplied in the kit.

JBM-100-E JBM-100-L-E JBM-100-D-E

This connection system is certified for use in IEC regions and provides two M25 threaded entries, one stopping plug, and one plastic power cable gland.

JBM-100-EP JBM-100-L-EP

This connection system is certified for use in IEC regions and provides two M25 threaded entries, an earthing plate, and an external earthing stud. It is designed for use with armoured cables.

Kit contents

- 1 junction box with terminals
- 1 light module (for -L only)
- 1 stand
- 3 core sealers
- 3 green/yellow earthing sleeve
- 1 34" stopping plug
- 1 polywater sachet
- 1 spanner
- 1 strain relief assembly
- 2 grommet plugs


- 1 junction box with terminals
- 1 light module (for -L only)
- 1 stand
- 3 core sealers
- 3 green/yellow earthing sleeve
- 1 M25 gland for power cable 8-15 mm (temperature range -55°C to +70°C) in diameter
- 1 M25 stopping plug
- 1 polywater sachet
- 1 spanner
- 1 strain relief assembly
- 2 grommet plugs
- 1 ATEX/IECEx Certified drainplug (for JBM-100-D-E only)

- junction box with terminals, earth continuity plate, and stud
- 1 light module (for -L only)
- 1 stand
- 3 core sealers
- 3 green/yellow earthing sleeve
- 2 M25 stopping plugs
- 1 polywater sachet
- 1 spanner
- 1 strain relief assembly
- 2 grommet plugs





Dimensions (nominal)

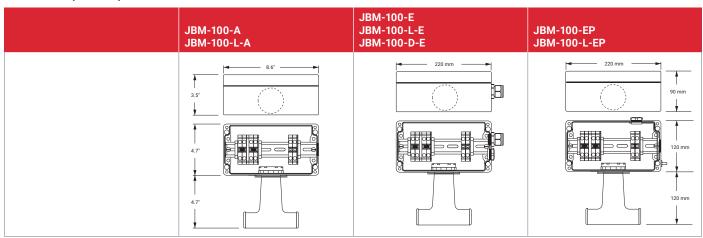

Technical details

| Heating cable capability | BTV-CR, BTV-CT, QTVR-CT, XTVR-CT, HTV-CT, VPL-CT | | |
|---|---|---|---|
| Ingress protection | IP66 | IP66 | IP66 |
| Entries | 1 x ¾" | 2 x M25 | 2 x M25 |
| Ambient temperature range | -55°C to +56°C (JBM-100-A) -40°C to +40°C (JBM-100-L-A) | -55°C to +56°C* (JBM-100-E and JBM-100-D-E) -40°C to +40°C (JBM-100-L-E) | -55°C to +56°C* (JBM-100-EP) -40°C to +40°C (JBM-100-L-EP) |
| | *Extra conditions for safe use apply at ambient temperatures >40°C. Temperature resistant power cable and metal glands must be used. Please refer to the certificate or installation instructions fo full details. | | |
| Max. pipe temperature | Refer to heating cable specificat | ion | |
| Terminals | Spring-type terminals 4 line, 2 ground | Spring-type terminals 2 phase, 2 neutral, 2 earth | Spring-type terminals 2 phase, 2 neutral, 2 earth |
| Max. conductor size | 8 AWG stranded | 10 mm² stranded, 10 mm² solid | 10 mm² stranded, 10 mm² solid |
| Max. operating voltage | 480 Vac* | 480 Vac* | 480 Vac* |
| | *JBM-100-L-E, JBM-100-L-EP and JBM-100-L-A are limited to 277 Vac. Extra conditions for safe use apply for voltages higher than 277 Vac. Please refer to the certificate or installation instructions for full details. | | |
| Max. continuous operating current (***) | 53 A | 53 A | 53 A |

^(***) For pipe temperature > 150°C and <260°C and XTVR or HTV heating cables, the maximum operating current shall be reduced to maximum 20 A.

Materials of construction

| Enclosure, lid, and stand | Electrostatic charge-resistant glass-filled engineered polymer, black | Electrostatic charge-resistant glass-filled engineered polymer, black | Electrostatic charge-resistant glass-filled engineered polymer, black |
|---------------------------|---|---|---|
| Lid screws | Stainless steel | Stainless steel | Stainless steel |
| Lid gasket | Silicone rubber | Silicone rubber | Silicone rubber |
| Earth continuity plate | N/A | N/A | Steel, zinc plated, and blue chromated |



| | JBM-100-A JBM-100-L-A | JBM-100-E JBM-100-L-E JBM-100-D-E | JBM-100-EP JBM-100-L-EP |
|-------------------|--------------------------|---|----------------------------|
| Colour | Red | Green | Green |
| Voltage rating | 100-277 Vac | 100-277 Vac | 100-277 Vac |
| Power consumption | < 1 W | < 1 W | < 1 W |

Ordering details (**)

APPROVALS (**)

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust) and Class I Div 1 & 2

Temperature classification

Temperature classification is defined by the complete system.

Product certification













For certifications in other regions (FM, CSA, IEx etc.), please refer to the installation manual. More details about product certification, approvals and conditions of safe use are available in the installation manual www.nVent.com/RAYCHEM.

ORDERING INFORMATION

Power connection

| Part Description (**) | JBM-100-A | JBM-100-E | JBM-100-EP |
|-----------------------|---------------------|---------------------|---------------------|
| PN (Weight) | 179935-000 (4.3 lb) | 831519-000 (1.9 kg) | 986415-000 (2.1 kg) |

Power connection with light

| Part Description | JBM-100-L-A | JBM-100-L-E | JBM-100-L-EP |
|------------------|---------------------|---------------------|---------------------|
| PN (Weight) | 656081-000 (5.3 lb) | 395855-000 (2.3 kg) | 300273-000 (2.5 kg) |

Power connection with drain plug

| Part Description | JBM-100-D-E | |
|------------------|----------------------|--|
| PN (Weight) | 1244-021056 (2.1 kg) | |

Accessories

| Accessories | | |
|-----------------------------------|---|------|
| Conduit Drain ¾" | Prevents condensate from collecting in the box | |
| Catalog number | JB-DRAIN-PLUG-3/4IN | |
| Part Number | 278621-000 | |
| Weight | 0.074 lb / 36 g | |
| Junction box standoff | For insulation thickness >100mm & ≤150mm * | |
| Catalog number | JBM-100-STANDOFF | |
| Part Number | P000003624 | O PE |
| Weight | 0.599 lb / 272 g | |
| * Consider extra pipe strap lengt | h 6-9" (150-225 mm) for attachment | |
| Small pipe adapter | Required for stand on pipes ≤ 1" | |
| Catalog number | JBM-SPA | |
| Part Number | D55673-000 | |
| Weight | 0.930 lb / 422 g (Bag of 5 adaptors) | |
| Glands for power cables | Hazardous area approved gland for cables 8-15 mm (temperature range -55°C/70°C) | |
| Catalog number | GL-55-M25 | |
| Part Number | 1244-019083 | |
| Weight | 0.016 kg | |
| Glands for power cables | Hazardous area approved gland for cables 8-17.5 mm (temperature range -20°C/70°C) | |
| Catalog number | GL-36-M25 | |
| Part Number | 1244-019082 | |
| Weight | 0.016 kg | |

^(**) Localized versions may exist with limited approvals and different part numbers. Contact your local sales representative.














Junction box for modular system 🖘

PRODUCT OVERVIEW

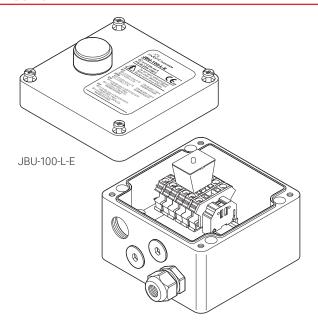

The nVent JBU-100 kit is designed to connect power to up to three nVent RAYCHEM BTV, QTVR, XTVR, HTV or VPL industrial parallel heating cables.

Innovative Spring-type terminals provide fast installation and safe, reliable, maintenance-free operation.

The box is part of the modular component system, it allows for maximum flexibility and can be either wall or pipe mounted.

Connection kits (M25) and insulation entry kits have to be ordered separately. The box is offered in two basic versions customised to local installation practices.

All kits are also available as a lighted version (-L). These include a unique light module with a superbright green LED that simply plugs into the terminals, and a lens in the lid. This provides indication that power is available in the box.

Description

| JBU-100-E JBU-100-L-E | JBU-100-EP JBU-100-L-EP |
|--|---|
| This box is certified for use in IEC regions and provides four M25 threaded entries, stopping plugs and one plastic power cable gland. | This box is certified for use in IEC regions and provides four M25 threaded entries, an earthing plate and an external earth stud. It is designed for use with armoured power cables. |
| Kit contents | |
| 1 junction box with terminals | 1 junction box with terminals with earth plate and external earth stud |
| 1 light module (for -L only) | 1 light module (for -L only) |
| 1 M25 gland for power cable 8-15 mm in diameter (temperature range −55°C to +70°C) | 2 M25 stopping plugs |
| 2 M25 stopping plugs | |










Dimensions (in mm)

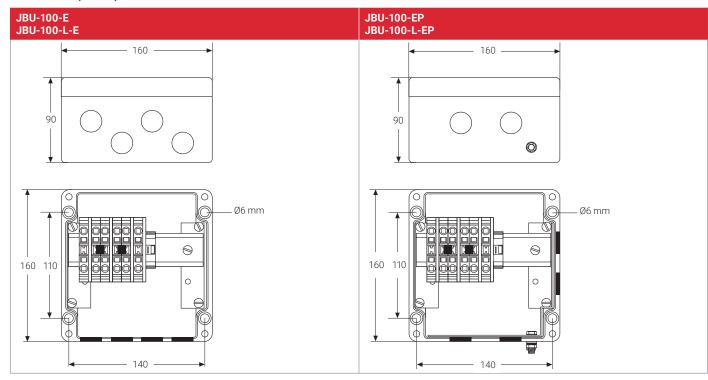

Technical details

| | JBU-100-E JBU-100-L-E | JBU-100-EP JBU-100-L-EP |
|------------------------------------|---|---|
| Ingress protection | IP66 | IP66 |
| Entries | 4 x M25 | 4 x M25 |
| Ambient temperature range | -55°C to +56°C ⁽¹⁾ (JBU-100-E) -40°C to +40°C (JBU-100-L-E) | -55°C to +56°C ⁽¹⁾ (JBU-100-EP) -40°C to +40°C (JBU-100-L-EP) |
| Terminals | Spring-type terminals | Spring-type terminals |
| | 2 phase, 2 neutral, 2 protective earth | 2 phase, 2 neutral, 2 protective earth |
| Max. conductor size | 10 mm² stranded, 10 mm² solid | 10 mm² stranded, 10 mm² solid |
| Max. operation voltage | 480* Vac | 480* Vac |
| | * JBU-100-L-E and JBU-100-L-EP are limited to 277 Vac. Extra conditions for safe use apply for voltages higher than 277 Vac. Please refer to the certificate or installation instructions for full details. | |
| Max. current rating ⁽²⁾ | 53 A | 53 A |

⁽¹⁾ Extra conditions for safe use apply for ambient temperatures above +40°C. Temperature resistant power cable and metal glands must be used. Please refer to the certificate or installation instructions for full details.

Materials of construction

| Enclosure, lid | Electrostatic charge-resistant glass-filled engineered polymer, black | Electrostatic charge-resistant glass-filled engineered polymer, black |
|------------------------|---|--|
| Lid screws | Stainless steel | Stainless steel |
| Lid gasket | Silicone rubber | Silicone rubber |
| Earth continuity plate | N/A | Steel, zinc plated, and blue chromated |

Optional LED indicator light

| Colour | Green | Green |
|-------------------|-------------|-------------|
| Voltage rating | 100-277 Vac | 100-277 Vac |
| Power consumption | < 1 W | < 1 W |

⁽²⁾ For pipe temperature > 150°C and < 260°C and XTVR or HTV heating cables, the maximum operating current shall be reduced to maximum 20 A. Refer to heating cable specification for the maximum pipe temperature.





Temperature classification

Temperature classification is defined by the complete system.

Product certification











More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

Junction box

| Part Description (**) | JBU-100-E | JBU-100-EP |
|-----------------------|---------------------|---------------------|
| PN (Weight) | 051976-000 (1.7 kg) | 243948-000 (1.8 kg) |

Junction box with light

| Part Description | JBU-100-L-E | JBU-100-L-EP |
|------------------|---------------------|---------------------|
| PN (Weight) | 069262-000 (2.1 kg) | 113974-000 (2.2 kg) |

Accessories


| Heating cable connection kits | C25-100, C25-21, CCON25-100 | C25-100, C25-21, CCON25-100, C25-100- METAL, C25-100-METAL-NP (Nickel plated brass), C25-100-METAL-SS (stainless steel) |
|---|--|---|
| Insulation entry kit | IEK-25-04 or IEK-25-PIPE | IEK-25-04 or IEK-25-PIPE |
| Power cable gland | GL-55-M25 hazardous area approved gland for cables 8-15 mm (temperature range -55°C to +70°C) GL-36-M25 hazardous area approved gland for cables 8-17.5 mm (temperature range -20°C to +70°C) | GL-38-M25-METAL (optional) |
| Junction box support bracket (optional) | SB-100, SB-101 | SB-100, SB-101 |

^(**) Localized versions may exist with limited approvals and different part numbers. Contact your local sales representative.



Junction box for modular system

PRODUCT OVERVIEW

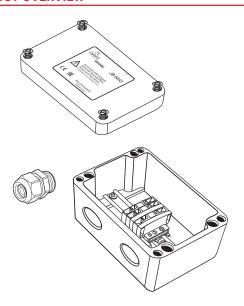

The nVent RAYCHEM JB-NH2 is a non-hazardous junction box for use with various heating cable types with M25 connection kits.

It can be used to make a power connection, splice, or end seal. For use with nVent RAYCHEM industrial parallel self-regulating heating cables.


Through the two entries a heating cable and a power cable, or two heating cables can be accommodated and connected to the DIN-rail mounted terminals. A power cable (M25) gland is included.


The box can be wall mounted via the four holes moulded in the back of the box. For pipe mounting, it is recommended that this box is used with a nVent RAYCHEM support bracket.



PRODUCT SPECIFICATIONS

Dimensions (in mm)

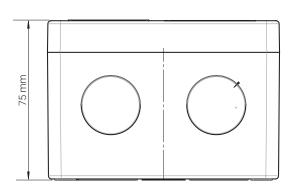

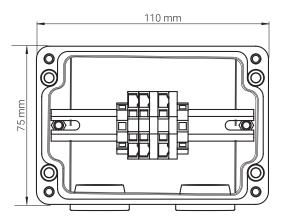

Enclosure

| Area of use | Ordinary (non-hazardous) |
|----------------------|---------------------------|
| Protection | IP66 |
| Entries | 2 x M25 |
| Exposure temperature | -40°C to +90°C |
| Base | Grey glass filled polymer |
| Lid | Grey glass filled polymer |

nVent.com/RAYCHEM | 77







Components





Terminals

| MSB 2.5 | Din rail mounted, spring-type terminals |
|---------------------|--|
| Voltage rating | 800 Vac |
| Max. conductor size | Stranded: 2.5 mm² Solid: 4 mm² |
| Current rating | Nominal 24 A - Maximum 30 A with 4 mm ² conductor cross section |
| Quantity | 2 phase and 1 PE |

APPROVALS

For use in ordinary (non-hazardous) area

Product certification



More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM

ORDERING INFORMATION

| Part description | JB-NH2 |
|------------------|-----------------------|
| PN (Weight) | 1244-020910 (0.34 kg) |


Accessories

| PN | Name | Description |
|------------|--------|--|
| 192932-000 | SB-100 | Support Bracket with Hollow Profile for Cable, Stainless Stell, Vertical |
| 990944-000 | SB-101 | Support Bracket, Double-Leg, Stainless Stell, Horizontal |
| 707366-000 | SB-110 | Support Bracket, Single-Leg, Stainless Steel, Vertical |
| 579796-000 | SB-111 | Support Bracket, Stainless Steel, Vertical |



Junction box for modular system

PRODUCT OVERVIEW

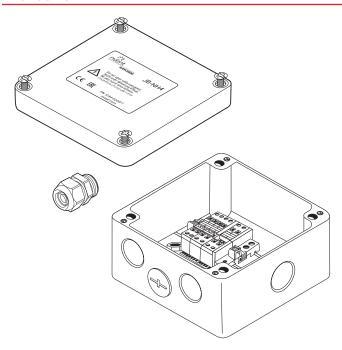

The nVent RAYCHEM JB-NH4 is a junction box for use with various heating cable types with M25 connection kits and suitable for use in ordinary (non-hazardous) areas. It can be used to make a power connection, splice, or end seal. For use with nVent RAYCHEM industrial parallel heating cables.

Up to four heating cables or three heating cables and the appropriate size power cable can be accommodated through the four entries and connected to the DIN-rail mounted terminals. A power cable gland (M25) included.

The box can be wall mounted via the four holes moulded in the back of the box. For pipe mounting, it is recommended that this box is used with a nVent RAYCHEM support bracket.






Components








Dimensions (in mm)

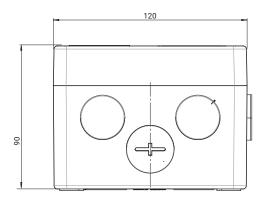

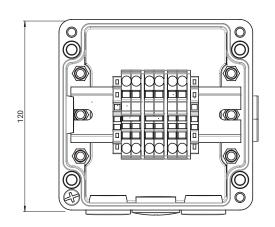

Enclosure

| Area of use | Ordinary (non-hazardous) |
|----------------------|---------------------------|
| Protection | IP66 |
| Entries | 4 x M25 |
| Exposure temperature | -40°C to +90°C |
| Base | Grey glass filled polymer |
| Lid | Grey glass filled polymer |
| | |





Terminals

| ST-4 | Din rail mounted, spring-type terminals |
|---------------------|--|
| Voltage rating | Max. 800 Vac |
| Max. conductor size | Stranded: 4 mm² Solid: 6 mm² |
| Current rating | Nominal 32 A - Maximum 40 A with 6 mm ² conductor cross section |
| Quantity | 4 phase terminals, bridged per 2 and 2 PE terminals |

APPROVALS

For use in ordinary (non-hazardous) area

Product certification







More details about product certification, approvals and conditions of safe use are available in the installation manual at ww.nVent.com/RAYCHEM.

ORDERING INFORMATION

Part description JB-NH4
PN (Weight) 1244-020911 (0.47 kg)

Accessories (to be ordered separately)

| PN | Name | Description |
|------------|--------|---|
| 192932-000 | SB-100 | Support Bracket with Hollow Profile for Cable, Stainless Stell, Vertical |
| 990944-000 | SB-101 | Support Bracket, Double-Leg, Stainless Stell, Horizontal |
| 707366-000 | SB-110 | Support Bracket, Single-Leg, Stainless Steel, Vertical |
| 579796-000 | SB-111 | Support Bracket, Stainless Steel, Vertical |

Components






CONNECT AND PROTECT

Multi purpose junction box 🕸

JB-EX-20 and

JB-EX-20-EP

PRODUCT OVERVIEW

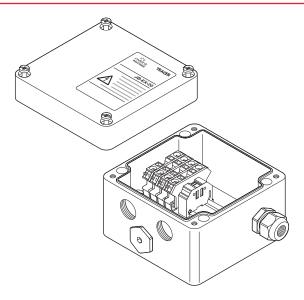

Industrial junction box for use in hazardous areas with nVent RAYCHEM FMT, FHT and PI heating cables. This box can be used to make connections between power cables, heating cables and cold lead cables. Depending on the configuration of the system, the box can accommodate heating cables, cold leads and a power cable. nVent RAYCHEM M20 connection kits have to be ordered separately depending on the type of heating cable being used.

Cable connection is via DIN rail mounted Spring-type terminals to provide fast installation and safe, reliable, maintenance-free operation.

The box can be either wall or pipe mounted via the four holes moulded in the base of the box. For pipe mounting, use one of the standard support brackets.

Typical use

JB-EX-20 JB-EX-20-EP

Power supply box for series heating cables (PI) and constant wattage parallel heating cables (FMT & FHT) or end box (star) for series heating cables (PI), when using M20 connection kits

Entries

| 3 x M20 | 3 x M20 |
|---------|---------|
| 1 x M25 | 1 x M25 |


Kit contents

| Junction box with spring-type terminals on DIN rail | Junction box with spring-type terminals on DIN rail, earthing plate and an external earth stud |
|--|--|
| 1 x M20 stopping plug | 1 x M20 stopping plug |
| 2 x M20 rain plugs (temporary) | 2 x M20 rain plugs (temporary) |
| 1 x M25 Hazardous area approved cable gland for power cables with Ø of 8-15 mm | 1 x M25 rain plug (temporary) |
| 1 x terminal jumper allowing various wiring configurations (remove terminal plate) | |

nVent.com/RAYCHEM 81



Dimensions (in mm)

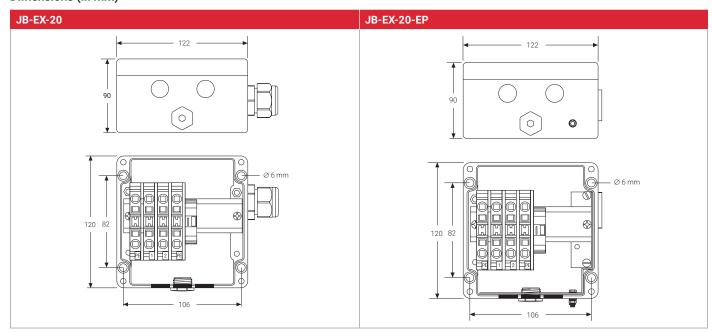

Materials of construction

| | JB-EX-20 | JB-EX-20-EP |
|-------------------|---|---|
| Box & lid | Electrostatic charge-resistant glass- filled engineered polymer, black | Electrostatic charge-resistant glass-filled engineered polymer, black |
| Sealing gasket | Silicone rubber | Silicone rubber |
| Lid fixing screws | Stainless steel (captive) | Stainless steel (captive) |
| Earthing plate | N.A. | Steel, zinc plated and blue chromated |

Technical details

| Ingress protection | IP66 | IP66 |
|---------------------------|---------------------------------------|---------------------------|
| Ambient temperature range | -55°C to +55°C | -55°C to +55°C |
| Terminals | | |
| Quantity | 4 pcs, spring-type | 4 pcs, spring-type |
| Labeling | 1, 2 + 2 x PE | 1, 2 + 2 x PE |
| Maximum conductor size | 10 mm ² (solid & stranded) | 10 mm² (solid & stranded) |
| Maximum operating voltage | 590 Vac | 590 Vac |
| Maximum operating current | 53 A | 53 A |



For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

Т6

Product certification











More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

| Order reference | JB-EX-20 | JB-EX-20-EP |
|----------------------|----------------------|--------------------|
| Part number (Weight) | 1244-000590 (0.9 kg) | 1244-006384 (1 kg) |

Accessories (to be ordered separately)

| | JB-EX-20 | JB-EX-20-EP |
|---|--|---|
| Support bracket | SB-100, SB-101, SB-110, SB-111 | SB-100, SB-101, SB-110, SB-111 |
| Power cable gland | GL-55-M25 (included) up to -55°C, 8-15 mm | GL-38-M25-METAL (optional) up to -60°C, inner diam. 10-13.5 mm, outer diam. 13.5-21 mm |
| Loose terminals (*) | Phase/neutral terminal: HWA-WAGO-PHA: Earth terminal: HWA-WAGO-EART End plate: HWA-WAGO-ENDI Terminal jumper: HWA-WAGO-JUM | TH PLATE |
| Connection kit for FMT and FHT heating cables | C20-01-F hot applied connection kit with plastic gland | C20-02-F cold applied connection kit with metal gland |
| Insulation entry kit for FMT and FHT heating cables | IEK-25-04 or IEK-25-PIPE | IEK-25-04 or IEK-25-PIPE |
| Gland for PI cold leads | C20-PI-PA-KIT Hazardous area approved gland, PA, up to -40°C | C20-PI-M0-KIT Hazardous area approved gland, Ni plated brass, up to -55°C (to be used with boxes with integral earth plate or with earth lug) |
| Insulation entry kit for PI cold leads | IEK-20-PI | IEK-20-PI |
| Gland for MI cold leads | Contact nVent or refer to DOC-606 | Contact nVent or refer to DOC-606 |
| Stopping plug | HWA-PLUG-M20-EXE-PLASTIC | HWA-PLUG-M20-EXE-PLASTIC |

^(*) in total no more than 6 terminals of this type should be installed.














Multi purpose junction box 🖘

PRODUCT OVERVIEW

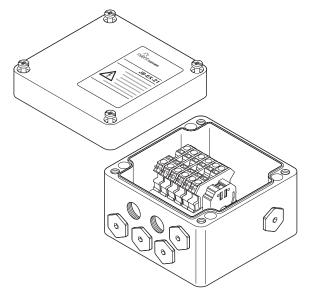

Industrial polyester junction box for use in hazardous areas. This box can be used to make connections between power cables, heating cables and cold lead cables using M20 connection kits. Depending on the configuration of the system, the box can accommodate six heating cables/cold leads and a power cable. M20 connection kits have to be ordered separately depending on the type of heating cable being used. Cable connection is accomplished via DIN rail mounted spring-type terminals.

The box can be either wall or pipe mounted via the four holes moulded in the base of the box. For pipe mounting use one of the standard support bracket.

Typical use

Power supply box, end-box, splice box (3-phase and loop), marshalling box.

Entries

6 x M20

1 x M32

Kit contents

1 x junction box with terminals on DIN rail

4 x M20 stopping plugs

2 x M20 rain plug (temporary)

1 x M32 stopping plug

1 x terminal jumper allowing various wiring configurations (remove terminal plate)









| Box & lid | Electrostatic charge-resistant glass-filled engineered polymer, black |
|---------------------------|---|
| Sealing gasket | Silicone rubber |
| Lid fixing screws | Stainless steel (captive) |
| Technical details | |
| Ingress protection | IP66 |
| Ambient temperature range | −55°C to +55°C |

| T - | | • | _ 1 | ١ ـ |
|------------|----|----|-----|-----|
| 10 | rm | ın | aı | ĸ |
| | | | u | |

| Quantity | 6 pc. |
|---------------------------|---------------------------|
| Туре | Spring-type |
| Labeling | 1, 2, 3, 3 x PE |
| Maximum conductor size | 10 mm² (solid & stranded) |
| Maximum operating voltage | 550 Vac |
| Maximum operating current | 53 A |

APPROVALS

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

Т6

Product certification














More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.











Part number (Weight) 1244-000579 (1.2 kg)

Accessories (to be ordered separately)

| | JB-EX-20 | JB-EX-21 |
|---|--|---|
| Support Bracket | SB-100, SB-101, SB-110, SB-111 | SB-100, SB-101 |
| Power cable gland | GL-55-M25 (included) up to -55°C, 8-15 mm | GL-45-M32 hazardous area approved gland for cables Ø 14-21 mm, up to −55°C |
| Loose terminals (*) | Phase/neutral terminal: HWA-WAGO-PHASE Earth terminal: HWA-WAGO-EARTH End plate: HWA-WAGO-ENDPLATE Terminal jumper: HWA-WAGO-JUMPER | |
| Connection kit for FMTand FHT heating cables | C20-01-F hot applied connection kit with plastic gland | C20-02-F cold applied connection |
| Insulation entry kit for FMT and FHT heating cables | IEK-25-04 or IEK-25-PIPE | IEK-25-04 or IEK-25-PIPE |
| Gland for PI cold leads | C20-PI-PA-KIT Hazardous area approved gland, PA, up to -40°C | C20-PI-M0-KIT Hazardous area approved gland, Ni plated brass, up to -55°C (to be used with boxes with integral earth plate or with earth lug) |
| Insulation entry kit for PI cold leads | IEK-20-PI | IEK-20-PI |
| Stopping plug | HWA-PLUG-M20-EXE-PLASTIC | HWA-PLUG-M20-EXE-PLASTIC |

^(*) in total no more than 10 terminals should be installed.

-25








JB-EX-21/35MM2

CONNECT AND PROTECT

RAYCHEM

Multi purpose junction box 🖘

PRODUCT OVERVIEW

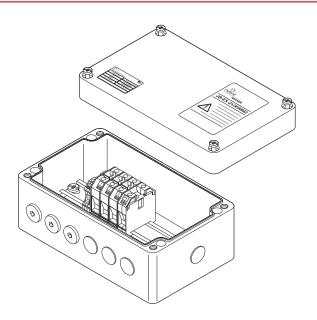

Industrial junction box for use in hazardous areas with PI and MI heating cables when large terminal sizes are required. This box can be used to make connections between power cables, heating cables and cold lead cables. Depending on the configuration of the system, the box can accommodate multiple heating cables/cold leads and a power cable.

The M20 connection kits have to be ordered separately depending on the type of heating cable being used.

Cable connection is accomplished via DIN rail mounted screw terminals from Weidmuller to provide safe, reliable and maintenance-free operation.

The box can be wall mounted via the four holes moulded in the base of the box.

Typical use

Power supply box, end-box, splice box for series heating cables (PI), when using M20 connection kits. Marshalling box for power cables.

Entries

6 x M20

1 x M40

Kit contents

1 x Junction box with screw terminals on DIN rail

3 x M20 stopping plugs


3 x M20 rain plugs (temporary)


1 x M40 stopping plug





Dimensions (in mm)

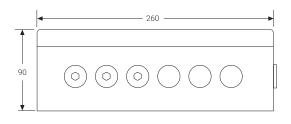

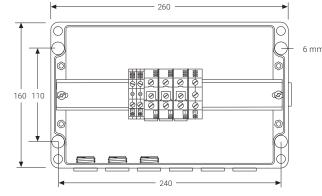

Materials of construction

| Box & lid | Electrostatic charge-resistant glass-filled engineered polymer, black | |
|-------------------|---|--|
| Sealing gasket | Silicone rubber | |
| Lid fixing screws | Stainless steel (captive) | |

Technical details

| Ingress protection | IP66 |
|---------------------------|----------------|
| Ambient temperature range | −55°C to +55°C |

Terminals

| Quantity & type | 3 pcs WDU35 screw terminals 2 pcs WPE10 earth terminals for heating cable earth leads 1 pc WPE35 earth terminal for power cable Junction box can accomodate up to 6 fully loaded phase/neutral terminals (maximum 10 terminals in total) |
|---------------------------|--|
| Labelling | 1, 2, 3 + 3 x PE |
| Minimum conductor size | 2.5 mm² stranded & solid |
| Maximum conductor size | 35 mm² stranded & 16 mm² solid |
| Maximum operating voltage | 690 Vac |
| Maximum operating current | 100 A |

APPROVALS

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

Т6

Product certification













More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

Components

ORDERING INFORMATION

| Order reference | nVent RAYCHEM JB-EX-21/35MM2 | |
|--|--|---|
| Part number (Weight) | 1244-006653 (1.9 kg) | |
| Accessories (to be ordered separately) | | |
| Glands for power cables | GL-51-M40 hazardous area approved gland for cables ø 19-28 mm, up to −55°C GL-45-M32 hazardous area approved gland for cables ø 14-21 mm, up to −55°C | |
| Reducer | REDUCER-M40/32-EEXE hazardous area M40 male to M32 female reducer | |
| Loose terminals | 35 mm² phase/neutral terminal: 10 mm² earth terminal: 35 mm² earth terminal: Endplate: Terminal jumper (2): Terminal jumper (3): | HWA-WDM-PHASE-35 HWA-WDM-EARTH-10 HWA-WDM-EARTH-35 HWA-WDM-PLATE HWA-WDM-JUMPER-35-2 HWA-WDM-JUMPER-35-3 |
| Gland for PI cold leads | C20-PI-PA-KIT Hazardous area approved gland, PA, up to −40°C C20-PI-M0-KIT Hazardous area approved gland, Ni plated brass, up to −55°C (to be used with boxes with integral earth plate or with earth lug) | |
| Insulation entry kit for PI cold leads | IEK-20-PI | |












Integrated junction box for direct connection of XPI heaters 🖘

PRODUCT OVERVIEW

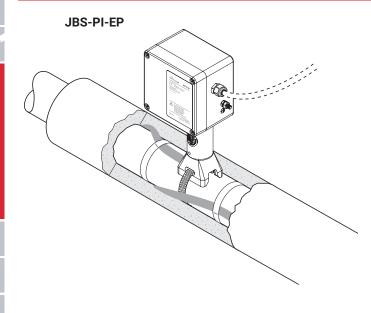

The nVent RAYCHEM JBS-PI-EP kit is designed to connect nVent RAYCHEM XPI industrial series heating cables directly to a power supply without the use of cold leads and with certain power and current restrictions.

The system is approved for hazardous areas and integrates the function of connection kits, cold leads and insulation entry kits. This simplifies the Bill of Materials and actual installation by eliminating the need for special tools or craft sensitive connections.

The XPI heating cables are directly connected into springtype terminals to provide a fast, reliable and maintenance free operation. This connection system significantly reduces installation time.

The kit is equipped with an earth plate & earth stud to allow for maximum flexibility on the power connection side (metal or polymeric glands).

The design validation depends on cable type, power and temperature and is captured in our design software packages such as TraceCalc Pro.

Application

This kit provides one M25 threaded entry for the power cable. It is also equipped with an integrated earth plate in case metallic power cable glands are used.

The kit can be used with nVent RAYCHEM XPI series heating cables type XPI-(S-)8000 up to XPI-(S-)50 to realize a monophase power connection or a loop end box.

Kit contents

- 1 junction box with spring-type terminals
- 1 stand assembly
- 2 green/yellow earthing sleeves
- 1 skip jumper
- 1 grommet (premounted)
- 1 polywater sachet
- 1 cable tie



Components













| Heating cables | XPI-8000 up to XPI-50 XPI-S-8000 up to XPI-S-50 (XPI-F not allowed) |
|----------------------------------|--|
| Ingress protection | IP66 |
| Entries | 1 x M25 |
| Ambient temperature range | −55°C up to +56°C |
| Minimum installation temperature | −55°C |
| Max continuous pipe temperature | 160°C* |
| Terminals | 16 mm² Spring-type terminals (terminal configuration & types cannot be altered w/o consulting nVent) |
| Max conductor size | 16 mm² stranded and solid |
| Max operating voltage | 550 Vac |
| Max continuous operating current | 45 A* |
| Max start-up current | 70 A* |
| Power cable gland | minimum required rating 90°C (not included) |
| | |

4.8 in (122 mm)

4.8 in (122 mm)

3.5 in (90 mm)

4.7 in (120 mm)

4.8 in (122 mm)

Materials of construction and weight


| materials of solicitation and weight | | |
|--------------------------------------|---|--|
| Enclosure, lid and stand | Electrostratic charge resistant glass-filled engineered polymer (Black) | |
| Lid screws | Stainless steel (captive screws) | |
| Lid gasket | Silicone rubber | |
| Earth continuity plate | Steel, zinc plated and blue chromated | |
| Weight | 1.3 kg | |







^{*} Different current and power restrictions apply for different ambient temperatures, pipe temperatures and cable types. Use nVent design software packages to validate the usage for your application.



Temperature classification

Temperature classification is defined by the complete system.

Product certification











More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING DETAILS

Small pipe adaptor

| Part description | JBS-PI-EP | |
|------------------|------------|--|
| PN | P000004428 | |
| Accessories | | |

JBS-SPA, required for pipes ≤1" (DN 25) (bag of 5 adaptors)
















Integrated junction box for direct connection of XPI heaters 🖘

PRODUCT OVERVIEW

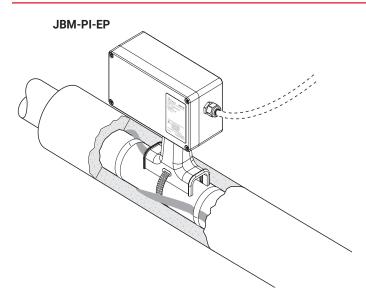

The nVent RAYCHEM JBM-PI-EP kit is designed to connect nVent RAYCHEM XPI industrial series heating cables directly to a power supply without the use of cold leads and with certain power and current restrictions.

The system is approved for hazardous areas and integrates the function of connection kits, cold leads and insulation entry kits. This simplifies the Bill of Materials and actual installation by eliminating the need for special tools or craft sensitive connections.

The XPI heating cables are directly connected into springtype terminals to provide a fast, reliable and maintenance free operation. This connection system significantly reduces installation time.

The kit is equipped with an earth plate & earth stud to allow for maximum flexibility on the power connection side (metal or polymeric glands).

The design validation depends on cable type, power and temperature and is captured in our design software packages such as TraceCalc Pro.

Application

This kit provides one M32 threaded entry for the power cable. It is also equipped with an integrated earth plate in case metallic power cable glands are used.

The kit can be used with nVent RAYCHEM XPI series heating cables type XPI-(S-)1000 up to XPI-(S-)1.8 to realize a monophase / triphase (star) power connection or a loop / triphase (star) end box.

Kit contents

- 1 junction box with spring-type terminals
- 1 stand assembly
- 3 green/yellow earthing sleeves
- 1 skip jumper
- 2 sealing pins
- 2 grommets (1 premounted for small cables, 1 for large cables)
- 1 stand wrench
- 1 strain relief assembly
- 1 polywater sachet

 \equiv








Components










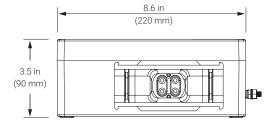

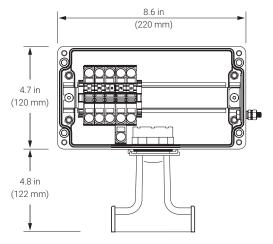

Technical details

| Heating cables | XPI-1000 up to XPI-1.8 XPI-S-1000 up to XPI-S-1.8 (XPI-F not allowed) |
|----------------------------------|--|
| Ingress protection | IP66 |
| Entries | 1 x M32 |
| Ambient temperature range | −55°C up to +56°C |
| Minimum installation temperature | −55°C |
| Max continuous pipe temperature | 160°C* |
| Terminals | 16 mm ² Spring-type terminals (terminal configuration & types cannot be altered w/o consulting nVent) |
| Max conductor size | 16 mm² stranded and solid |
| Max operating voltage | 550 Vac |
| Max continuous operating current | 45 A* |
| Max start-up current | 70 A* |
| Power cable gland | minimum required rating 90°C (not included) |

^{*} Different current and power restrictions apply for different ambient temperatures, pipe temperatures and cable types. Use nVent design software packages to validate the usage for your application.

Materials of construction and weight

| Enclosure, lid and stand | Electrostratic charge resistant glass-filled engineered polymer (Black) |
|--------------------------|---|
| Lid screws | Stainless steel (captive screws) |
| Lid gasket | Silicone rubber |
| Earth continuity plate | Steel, zinc plated and blue chromated |
| Weight | 1.5 kg |

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust).

Temperature classification

Temperature classification is defined by the complete system.

Product certification











More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING DETAILS

| Part description | JBM-PI-EP | |
|--------------------|------------|--|
| PN | P000004429 | |
| Accessories | | |
| Small pipe adaptor | JBM-SPA | |







Components








Multi purpose junction box ⟨€x⟩

PRODUCT OVERVIEW

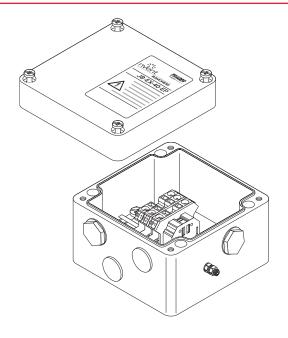

Industrial polyester junction box with earth plate for use in hazardous areas. This box can be used to make connections between power cables, heating cables and cold lead cables using M25 metallic connection kits or glands. Earthing of the connections is realized via the earth plate

Depending on the configuration of the system, the box can accommodate 3 cold lead entries and/or a power cable.

M25 connection kits have to be ordered separately or are integrated in the heating unit (eg MI heating units), depending on the type of heating cable being used. Cable connection is accomplished via DIN rail mounted spring-type terminals.

The box can be either wall or pipe mounted via the four holes moulded in the base of the box. For pipe mounting use one of the standard support bracket.

Typical use

Power supply box, end-box (3-Phase), marshalling box.

Entries

3 x M25

1 x M25

Kit contents

1 x junction box with terminals on DIN rail

2 x M25 stopping plugs


2 x M25 rain plug (temporary)








Dimensions (in mm)



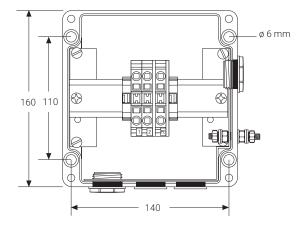

Materials of construction

| Box & lid | Electrostatic charge-resistant glass-filled engineered polymer, black |
|-------------------|---|
| Sealing gasket | Silicone rubber |
| Lid fixing screws | Stainless steel (captive) |

Technical details

| Ingress protection | IP66 |
|---------------------------|----------------|
| Ambient temperature range | -55°C to +55°C |

Terminals

| Terrinias | |
|---------------------------|---------------------------|
| Quantity | 3 pc |
| Туре | Spring-type |
| Labeling | 1, 2, PE |
| Maximum conductor size | 10 mm² (solid & stranded) |
| Maximum operating voltage | 550 Vac |
| Maximum operating current | 53 A |

APPROVALS

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

Т6

Product certification

Present logos of available certificates













More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.





PN (Weight) 1244-020505 (1.6 kg)

Accessories (to be ordered separately)

| Support bracket | SB-100, SB-101, SB-130 (fo | or fixation to cable tray) | |
|-------------------------|--|--|--|
| Gland for MI cold leads | Integrated in MI heating u | Integrated in MI heating unit or contact Thermal management for more information | |
| Gland for power cable | GL-55-M25 (Polyamide) up to –55°C, 8-15 mm GL-38-M25-METAL (Ni pla up to –60°C, inner diam. 1 | ated brass) 10-13.5 mm, outer diam. 13.5-21 mm | |
| Loose terminals (*) | Phase/neutral terminal: Earth terminal: End plate: Terminal jumper: | HWA-WAGO-PHASE HWA-WAGO-EARTH HWA-WAGO-ENDPLATE HWA-WAGO-JUMPER | |

(*) in total no more than 7 terminals should be installed.






JB-EX-41-EP



CONNECT AND PROTECT

Multi purpose junction box 🖘

PRODUCT OVERVIEW

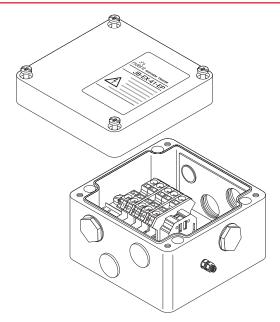

Industrial polyester junction box with earth plate for use in hazardous areas. This box can be used to make connections between power cables, heating cables and cold lead cables using M25 metallic connection kits or glands. Earthing of the connections is realized via the earth plate

Depending on the configuration of the system, the box can accommodate 6 cold lead entries and/or a power cable.

M25 connection kits have to be ordered separately or are integrated in the heating unit (eg MI heating units), depending on the type of heating cable being used. Cable connection is accomplished via DIN rail mounted spring-type terminals.

The box can be either wall or pipe mounted via the four holes moulded in the base of the box. For pipe mounting use one of the standard support bracket.





Components



Typical use


| • • | |
|--------------|---|
| | Power supply box, (power) splice box, (power) tee box, marshalling box. |
| Entries | |
| | 6 x M25 |
| | 1 x M25 |
| Kit contents | |
| | 1 x junction box with terminals on DIN rail |
| | 3 x M25 stopping plugs |
| | 4 x M25 rain plug (temporary) |







Dimensions (in mm)

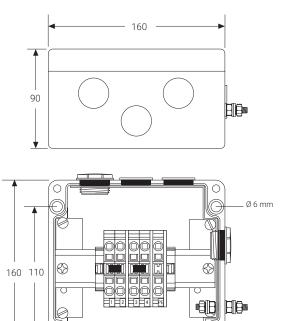

Materials of construction

| Box & lid | Electrostatic charge-resistant glass-filled engineered polymer, black |
|-------------------|---|
| Sealing gasket | Silicone rubber |
| Lid fixing screws | Stainless steel (captive) |
| Technical details | |

140

IP66 Ingress protection

Ambient temperature range -55°C to +55°C

Quantity 5 pcs, bridged per 2

Type Spring-type Labeling 1, 2, 3, 4, PE

Maximum conductor size 10 mm² (solid & stranded)

Maximum operating voltage 550 Vac Maximum operating current 53 A

APPROVALS

Terminals

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

Т6

Product certification

Present logos of available certificates











More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

| Order reference | JB-EX-41-EP |
|-----------------|-------------|
|-----------------|-------------|

Part number (Weight) 1244-020506 (1.9 kg)

(*) in total no more than 7 terminals should be installed.

Accessories (to be ordered separately)

| Support bracket | SB-100, SB-101, SB-130 (for fixation to cable tray) |
|-------------------------|---|
| Gland for MI cold leads | Integrated in MI heating unit or contact nVent for more information |
| Gland for power cable | GL-55-M25 (Polyamide) up to −55°C, 8-15 mm GL-38-M25-METAL (Ni plated brass) up to −60°C, inner diam. 10-13.5 mm, outer diam. 13.5-21 mm |
| Loose terminals (*) | Phase/neutral terminal: HWA-WAGO-PHASE Earth terminal: HWA-WAGO-EARTH End plate: HWA-WAGO-ENDPLATE Terminal jumper: HWA-WAGO-JUMPER |












Multi purpose junction box ⟨€x⟩

PRODUCT OVERVIEW

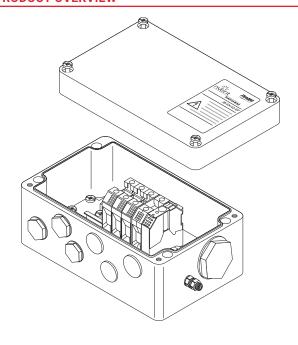

Industrial polyester junction box with earth plate for use in hazardous areas. This box can be used to make connections between power cables, heating cables and cold lead cables using M25 metallic connection kits or glands. Earthing of the connections is realized via the earth plate

Depending on the configuration of the system, the box can accommodate 6 cold lead entries and/or a power cable.

M25 connection kits have to be ordered separately or are integrated in the heating unit (eg MI heating units), depending on the type of heating cable being used. Cable connection is accomplished via DIN rail mounted spring-type terminals.

The box can be either wall or pipe mounted via the four holes moulded in the base of the box. For pipe mounting use one of the standard support bracket.

Typical use

Power supply box, end-box (3-Phase), (power) splice box, (power) tee box, marshalling box.

Entries

6 x M25

1 x M40

Kit contents

1 x junction box with terminals on DIN rail

3 x M25 stopping plugs


3 x M25 rain plug (temporary)

1 x M40 stopping plug







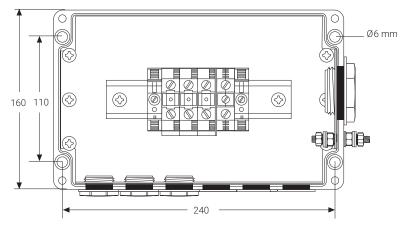

Materials of construction

| Box & lid | Electrostatic charge-resistant glass-filled engineered polymer, black |
|-------------------|---|
| Sealing gasket | Silicone rubber |
| Lid fixing screws | Stainless steel (captive) |

| Technical details | |
|---------------------------|---|
| Ingress protection | IP66 |
| Ambient temperature range | −55°C to +55°C |
| Terminals | |
| Quantity and Type | 3 pcs WDU35 screw terminals |
| | 1 pc WPE35 earth terminal for power cable |
| | Junction box can accomodate up to 6 fully loaded phase/neutral terminals (maximum 8 terminals in total) |
| Labeling | 1, 2, 3 + PE |
| Minimum conductor size | 2.5 mm² (solid & stranded) |
| Maximum conductor size | 35 mm² (solid & stranded) |
| Maximum operating voltage | 690 Vac |
| Maximum operating current | 100 A |



Components



Т6

Product certification

Present logos of available certificates









For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)





More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM

ORDERING INFORMATION

| Order reference | JB-EX-42-EP |
|-----------------|--------------------|
| PN (Weight) | 1244-020507 (2 kg) |

Accessories (to be ordered separately)

| Support bracket | 2 x SB-111 | |
|-------------------------|---|---|
| Gland for MI cold leads | Integrated in MI heating unit or contact nVent for more information | |
| Gland for power cable | GL-51-M40 (Polyamide) up to −55°C, 17-28 mm | |
| Loose terminals (*) | 35 mm² phase/neutral terminal: 35 mm² earth terminal: Endplate: Terminal jumper (2): Terminal jumper (3): | HWA-WDM-PHASE-35 HWA-WDM-EARTH-35 HWA-WDM-PLATE HWA-WDM-JUMPER-35-2 HWA-WDM-JUMPER-35-3 |
| Gland for MI cold leads | In case of factory terminated units, already present. | |

^(*) in total no more than 8 terminals should be installed.












Junction box

PRODUCT OVERVIEW

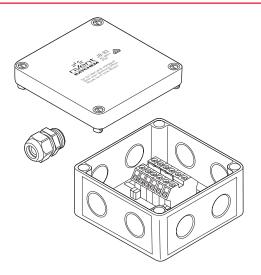

The nVent RAYCHEM JB-82 is a standard, non-hazardous polycarbonate junction box.


It may be used to make a power connection, splice, powered splice, powered tee or simple tee, for use with nVent RAYCHEM industrial parallel heating cables.

Up to four heating cables or three heating cables and the appropriate size power cable can be accommodated through the four entries and connected to the rail mounted terminals.

For pipe mounting, it is recommended that this box is used with a nVent RAYCHEM support bracket.

PRODUCT SPECIFICATIONS

Dimensions (in mm)

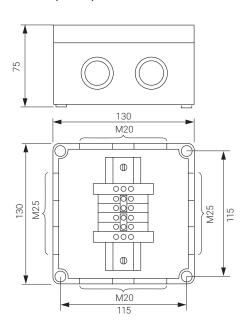

Components









Enclosure

| Protection | IP66 |
|----------------------|---------------------------------|
| Entries | 4 x M20 and 4 x M25 |
| Exposure temperature | -35°C to +115°C |
| Base | Grey glass filled polycarbonate |
| Lid | Grey polycarbonate |
| Lid gasket | Foamed polyurethane |

Phase terminals

| Conta-Clip RK6-10 | Din rail mounted |
|---------------------|---|
| Voltage rating | 750 Vac |
| Max. conductor size | 0.5-10 mm ² (solid and stranded) |
| Current rating | 61 A |
| Quantity | Two cross-connected groups of two |

Earth terminals

2 Conta-Clip SL10/35

Mounting

| Through holes moulded in the base of the junction box | |
|---|--|
| Centres | 115 x 115 mm |
| Size | 5 mm diameter |
| Cable gland | Polyamide with locknut for cable diameters from 9 to 16 mm |

APPROVALS

For use in ordinary areas; in- and outdoors

Product certification



ORDERING INFORMATION

| Part description | JB-82 | |
|------------------------------|--------------------------------|--|
| PN (Weight) | 535679-000 (0.47 kg) | |
| Accessories | | |
| Junction box support bracket | SB-100, SB-101, SB-110, SB-111 | |






JB-MB-25/16MM2 and JB-MB-26/16MM2




CONNECT AND PROTECT

Marshalling box

PRODUCT OVERVIEW

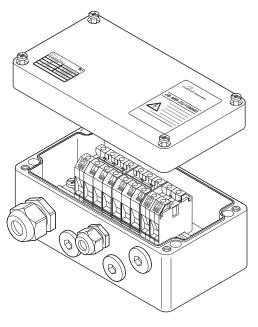

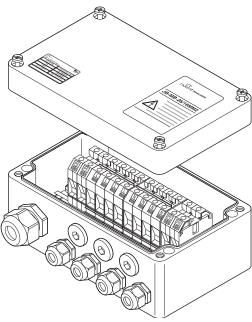

Both connection boxes are ATEX approved polyester marshalling boxes that can be used in hazardous areas.

The nVent RAYCHEM JB-MB-25/16MM2 is intended to split a power cable into a maximum of four subsequent heat-tracing feeders, while the JB-MB-26/16MM2 allows the connection of maximum seven subsequent heat-tracing feeders. They are particularly suited for powering multiple short heat-tracing circuits from a single supply point, typically in instrumentation areas or where the power infrastructure is limited.

Cable connection is accomplished via DIN rail mounted screw terminals that allow the connection of a wide range of cable cross sections. The terminals are already equipped with the necessary terminal jumpers to minimize installation time.

Both boxes can be wall mounted via the four holes moulded in base of each box.

The JB-MB-25/16MM2 can also be pipe mounted with a standard support bracket.

| JB-MB-25/16MM2 | JB-MB-26/16MM2 |
|-----------------|-----------------|
| Marshalling box | Marshalling box |

Entries


| 1 x M32 | 1 x M32 |
|---------|---------|
| 4 x M25 | 7 x M25 |


Kit contents


| 1 junction box with Weidmüller screw terminals on DIN rail, two sets bridged per three and three earth terminals, | 1 junction box with Weidmüller screw terminals on DIN rail, two sets bridged per four and four earth terminals, |
|---|---|
| 1 M32 Hazardous area approved cable gland for power cables with \emptyset of 14 to 21 mm, | 1 M32 Hazardous area approved cable gland for power cables with Ø of 14 to 21 mm, |
| 1 M25 Hazardous area approved cable gland for power cables with Ø of 8 to 15 mm, | 4 M25 Hazardous area approved cable glands for power cables with \emptyset of 8 to 15 mm, |
| 3 M25 stopping plugs | 3 M25 stopping plugs |

PRODUCT SPECIFICATIONS

Dimensions (in mm)

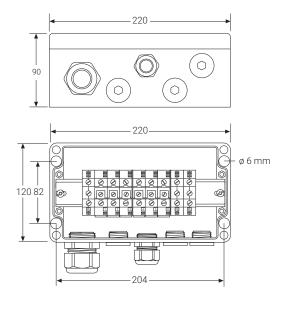



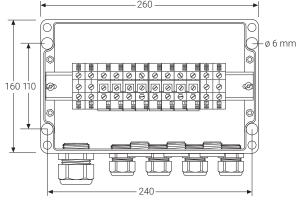

Materials of construction

| | JB-MB-25/16MM2 | JB-MB-26/16MM2 |
|-------------------|---------------------------|---------------------------|
| Box & lid | Glass filled polyester | Glass filled polyester |
| Sealing gasket | Silicone rubber | Silicone rubber |
| Lid fixing screws | Stainless steel (captive) | Stainless steel (captive) |

Technical details

| | JB-MB-25/16MM2 | JB-MB-26/16MM2 |
|---------------------------|--|---|
| Ingress protection | IP66 | IP66 |
| Ambient temperature range | -55°C to +55°C | −55°C to +55°C |
| Terminals | | |
| Quantity & type | 9 pcs Weidmüller screw terminals, bridged per 3, 6 x WDU16, 3 x WPE16, Max. 8 fully loaded phase/neutral terminals; max. 12 terminals in total | 12 pcs Weidmüller screw terminals, bridged per 4, 8 x WDU16 and 4 x WPE16, Max. 10 fully loaded phase/neutral terminals; max. 15 terminals in total |
| Labelling | 1, 2, 3, 4, 5, 6 and PE | L, N and P.E. |
| Minimum conductor size | 1.5 mm² stranded & solid | 1.5 mm² stranded & solid |
| Maximum conductor size | 25 mm² stranded, 16 mm² solid | 25 mm² stranded, 16 mm² solid |
| Maximum operating voltage | 550 Vac | 550 Vac |
| Maximum operating current | 50 A | 50 A |

APPROVALS

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

Product certification











More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

| Order reference | JB-MB-25/16MM2 | JB-MB-26/16MM2 |
|----------------------|----------------------|----------------------|
| Part number (Weight) | 1244-006656 (0.9 kg) | 1244-006657 (1.9 kg) |

Accessories (to be ordered separately)

| Support bracket PN | SB-125 165886-000 | N.A. (wall mounting) |
|---|--|--|
| M25 Power cable gland PN | GL-55-M25 (1 included) 1244-019083 | GL-55-M25 (4 included) 1244-019083 |
| M32 Power cable gland PN | GL-45-M32 (included) 1244-000847 | GL-45-M32 (included) 1244-000847 |
| M25 Stopping plug PN | HWA-PLUG-M25-PLASTIC (3 included) 434994-000 | HWA-PLUG-M25-PLASTIC (3 included) 434994-000 |
| 16 mm² Phase terminal PN | HWA-WDM-PHASE-16 (6 included) 1244-006992 | HWA-WDM-PHASE-16 (8 included) 1244-006992 |
| 16 mm² Earth terminal PN | HWA-WDM-EARTH-16 (3 included) 1244-006993 | HWA-WDM-EARTH-16 (4 included) 1244-006993 |
| Terminal jumper for bridging 2 terminals PN | HWA-WDM-JUMPER-16-2 1244-006997 | HWA-WDM-JUMPER-16-2 1244-006997 |
| Terminal jumper for bridging 3 terminals PN | HWA-WDM-JUMPER-16-3 (2 included) 1244-006998 | HWA-WDM-JUMPER-16-3 1244-006998 |
| Terminal jumper for bridging 4 terminals PN | HWA-WDM-JUMPER-16-4 1244-006999 | HWA-WDM-JUMPER-16-4 (2 included) 1244-006999 |
| Endplate PN | HWA-WDM-PLATE 124-007004 | HWA-WDM-PLATE 1244-007004 |










Cold applied connection kit ⟨€x⟩

PRODUCT OVERVIEW

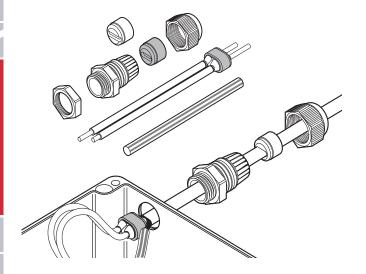

This connection kit is designed for terminating all nVent RAYCHEM BTV, QTVR, XTV, KTV, HTV and VPL industrial parallel heating cables to a junction box, whilst maintaining electrical insulation of the heating cable conductors and core. It is approved for use in hazardous areas.

The core sealing boot does not require a heat gun or torch for the installation (no hot work permit necessary). The non-curing sealant (silicone free) allows easy installation and facilitates maintenance purposes.

Two grommets supplied in this kit enable the gland to maintain optimum sealing under various ambient conditions. An additional locknut is provided for unthreaded entries.

Application

Connection kit for BTV, QTVR, XTV, KTV, HTV and VPL parallel heating cables.

Kit contents

1 gland, 2 grommets, 1 locknut, 1 core sealer, 1 green/yellow tube, 1 installation instruction (multilingual)

PRODUCT SPECIFICATION

| Туре | Cold applied |
|-----------------------------------|--------------|
| Thread size | M25 x 1.5 |
| Min. ambient temperature | −55°C |
| Max. exposure temperature (gland) | 110°C |

APPROVALS

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

Temperature classification is defined by the complete system.

Product certification















More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

| Part description | C25-100 |
|------------------|----------------------|
| PN (Weight) | 263012-000 (0.07 kg) |





Components










Heat-shrink connection kit

PRODUCT OVERVIEW

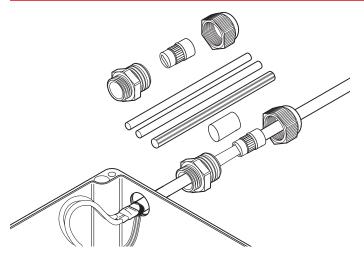

This connection kit is designed for connecting all nVent RAYCHEM BSA and BTV-CR industrial parallel heating cables to a junction box in ordinary (non-hazardous) area applications, whilst maintaining electrical insulation of the heating cable conductors and core.

The sealing of the heating cable core is provided by heat-shrinkable sleeves. The grommet supplied in this kit enables the gland to maintain optimum sealing under various ambient conditions.

Application

Connection kit for BSA and BTV-CR parallel heating cables in ordinary (non-hazardous) area

Kit contents

1 gland with grommet

1 green/yellow tube and heat-shrinkable sleeves for core sealing

1 installation instruction (multilingual)

PRODUCT SPECIFICATIONS

| Туре | Heat-shrinkable |
|-----------------------------------|-----------------|
| Thread size | M25 x 1.5 |
| Min. ambient temperature | -20°C |
| Max. exposure temperature (gland) | 100°C |
| IP ingress protection rating | IP66 |

APPROVALS

For use in ordinary (non-hazardous) area

Product certification



More details about product certification, approvals and conditions of safe use are available in the installation manual at nVent.com/RAYCHEM

ORDERING INFORMATION

| Part description | C25-01 |
|------------------|-----------------------|
| PN (Weight) | 1244-020909 (0.06 kg) |


CSE-05-DR



CONNECT AND PROTECT

Cold lead/splice connection and end seal kit

PRODUCT OVERVIEW

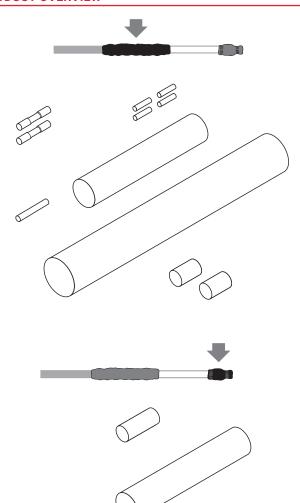

The nVent RAYCHEM CSE-05-DR kit combines the following: in-line connection of a BSA heating cable to a flexible power cable, or in-line joining of 2 BSA heating cables, and

end termination of the BSA heating cable.

This kit is designed for use in ordinary area (non hazardous).

It employs easy to use heat-shrinkable tubing with an adhesive, that when heated forms a semi-flexible moisture proof encapsulation.

Electrical continuation is maintained via crimps for the conductors and another crimp connection for the drainwire of the heating cable.

Due to its low profile design the finished power or splice connection and end seal can be installed under the insulation, directly on the pipe.



Components





Application

In-line cold lead/splice connection and end seal kit for BSA heating cable in ordinary area

Kit contents

Heat-shrinkable adhesive coated sleeves, insulation sleeves, crimps and installation instruction

Components



RODGET SI ECILICATION

| Lechi | nical d | ietails | |
|-------|---------|---------|--|
|-------|---------|---------|--|

Max. exposure temperature during 85°C

operation

Maximum current rating 32 A

Dielectric strength 1.3 – 3.5 MV/m

Volume resistivity $10^{12} \Omega \text{ cm}$

Final dimensions length approx. 200 mm

Minimum Installation Temperature −10°C

Installation details

Heat shrinkable tubing 125°C

Gas torch or equivalent min. 1460 W hot air gun

APPROVALS

For use in ordinary (non-hazardous) area

Product certification







More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.


ORDERING INFORMATION

| Part description | CSE-05-DR |
|------------------|-----------------------|
| PN (Weight) | 1244-021440 (0.05 kg) |



Heat-shrink connection kit &

PRODUCT OVERVIEW

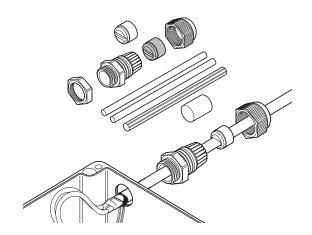

This connection kit is designed for terminating all nVent RAYCHEM BTV, QTVR, XTV, KTV and VPL industrial parallel heating cables to a junction box, whilst maintaining electrical insulation of the heating cable conductors and core.

The sealing of the heating cable core is provided by nVent RAYCHEM heat-shrinkable sleeves. Two grommets supplied in this kit enable the gland to maintain optimum sealing under various ambient conditions.

An additional locknut is provided for unthreaded entries.

Application

Connection kit for BTV, QTVR, XTV, KTV and VPL parallel heating cables

Kit contents

1 gland

2 grommets

1 locknut

1 green/yellow tube, heat-shrinkable sleeves for core sealing

1 installation instruction (multilingual)

PRODUCT SPECIFICATION

Technical details

| Туре | Heat-shrinkable |
|-----------------------------------|-----------------|
| Thread size | M25 x 1.5 |
| Min. ambient temperature | -55°C |
| Max. exposure temperature (gland) | 110°C |
| IP ingress protection rating | IP66 |







Components







The kit is certified as part of the system approval of the various heating cables. For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

Temperature classification is defined by the complete system.

Product certification













More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

| Part description | nVent RAYCHEM C25-21 |
|------------------|----------------------|
| PN (Weight) | 311147-000 (0.06 kg) |

Components


C25-100-METAL and C3/4-100-METAL



CONNECT AND PROTECT

Cold applied metal connection kit (Ex)

PRODUCT OVERVIEW

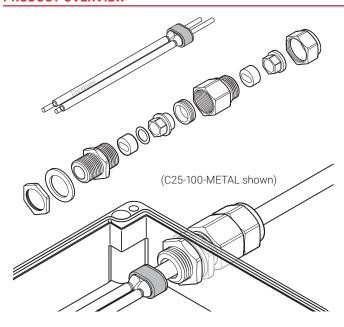

These connection kits are designed for terminating all nVent RAYCHEM BTV, QTVR, XTV, KTV, HTV and VPL industrial parallel heating cables to a junction box, whilst maintaining electrical insulation of the heating cable conductors and core.

The braid is directly connected to the metal gland body. The connection kits can be used with metal boxes or plastic boxes with internal earthing plate. They are approved for use in hazardous areas.

The core sealing boot does not require a heat gun or torch for the installation (no hot work permit necessary). The non-curing sealant allows easy installation and facilitates maintenance purposes.

The C25-100-METAL kit is designed for use with M25 entries, the C3/4-100-METAL for 3/4" NPT entries.

A metal locknut is included.

Application

Connection kit for BTV, QTVR, XTV, KTV, HTV and VPL parallel heating cables

Kit contents

1 gland,

2 grommets,

1 locknut and sealing washer (only M25),

1 core sealer,

1 installation instruction (multilingual).

Components





| | C25-100-METAL | C3/4-100-METAL |
|---------------------------|---------------|----------------|
| Thread size | M25 x 1.5 | 3/4" NPT |
| Gland material | Brass | Brass |
| Min. ambient temperature | -60°C | -60°C |
| Max. exposure temperature | 180°C | 180°C |

APPROVALS

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

Temperature classification is defined by the complete system.

Product certification











More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.


ORDERING INFORMATION

| ORDERING INFORMATION | | | |
|----------------------|-----------------------|----------------------|--|
| Part description | C25-100-METAL | C3/4-100-METAL | |
| PN (Weight) | 875016-000 (0.31 kg) | 440588-000 (0.3 kg) | |
| Gland material | Brass | Brass | |
| | | | |
| Part description | C25-100-METAL-NP | C3/4-100-METAL-NP | |
| PN (Weight) | 1244-002296 (0.31 kg) | 1244-001350 (0.3 kg) | |
| Gland material | Nickel Plated Brass | Nickel Plated Brass | |
| | | | |
| Part description | C25-100-METAL-SS | | |
| PN (Weight) | 1244-017869 (0.3 kg) | | |
| Gland material | Stainless Steel | | |



Cold applied conduit connection kit 🖾

PRODUCT OVERVIEW

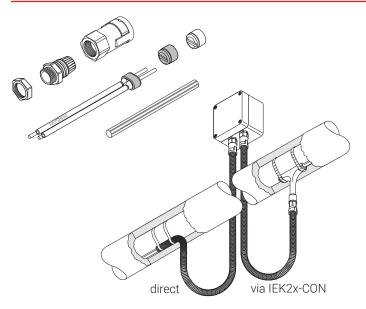

This connection kit is designed for terminating all nVent RAYCHEM BTV, QTVR, XTV, KTV and VPL parallel industrial heating cables to a junction box, whilst maintaining electrical insulation of the heating cable conductors and core as well as providing a reliable and sealed connection to a conduit system. It is approved for use in hazardous locations.

The conduit system will provide supplementary mechanical protection of the heating cable between a junction box and the entry into the insulation. The conduit connection is fast and reliable and allows simple installation whilst maintaining an IP66 seal. The kit can be used with various types of conduits which can be cut-to-length as required in the field. The core sealing boot for the heating cable does not require a heat gun or torch for the installation (no need for a hot work permit). The non-curing sealant (silicone free) allows easy installation and facilitates maintenance purposes.

The conduit and eventually required insulation entry kit needs to be purchased separately.

Application

Connection kit with conduit adaptor for BTV, QTVR, XTV, KTV and VPL parallel industrial heating cables

Kit contents

1 gland body,

1 conduit adaptor including safety retention clip,

2 grommets,

1 locknut,

1 core sealer,

1 green/yellow tube,

1 installation instruction (multilingual)

PRODUCT SPECIFICATION

Technical details

| Thread size | M25 x 1.5 |
|------------------------------|---|
| Conduit compatibility | ND 23 mm, nVent RAYCHEM conduits type CCON25-C |
| Ambient temperature | −55°C to +40°C |
| IP ingress protection rating | IP66 |
| Surface resistance | $\!<$ 1G $\!\Omega$ according to the requirements of EN 60079-0 and EN 61241-0 for use in hazardous areas |





Components







Components



For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

Temperature classification is defined by the complete system.

Product certification





More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

Part description nVent RAYCHEM CCON25-100 PN (weight) 1244-003272 (0.075 kg)


Accessories

For suitable conduits and insulation entry kits refer to the datasheet for CCON2x-C...



Cold applied low profile power connection (Ex)

PRODUCT OVERVIEW

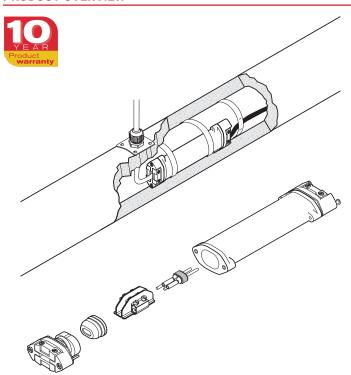

The nVent RAYCHEM C-150-E is a cold applied low profile power connection. The kit enables in line connection of nVent RAYCHEM industrial heating cables, BTV, QTVR and XTVR, to a flexible power cable. It can be used in applications with temperature ratings from -55°C to 200°C. It is approved for use in hazardous areas.

A nVent RAYCHEM supplied power cable such as C-150-PC may be used or any suitable standard industrial power cable type 3 x 1.5 mm² or 3 x 2.5 mm² with stranded copper conductors and an outer insulation jacket. The power cable is connected by means of screw terminals to the conductors and the braid of the heating cable.

C-150-E is used as connector:

- · where connection to a junction box is difficult e.g. because of space limitation
- · on instrument lines or loading arms
- where installation of "under insulation" components is preferred
- · as a cost effective solution for short heat-tracing lines as an alternative for JBS-100.

Application

Cold applied low profile splice for connection of BTV, QTVR and XTVR heating cables to a power cable

Kit contents

1 splice housing assembly including

- · 1 sealing grommet assembly for heater
- 1 pressure plate/strain relief assembly

1 core sealer for heater

1 spacer including screw terminal

1 sealing grommet assembly for the power cable

1 pressure plate/strain relief assembly for the power cable

1 identification label

1 installation instruction





Components










Dimensions (in mm)

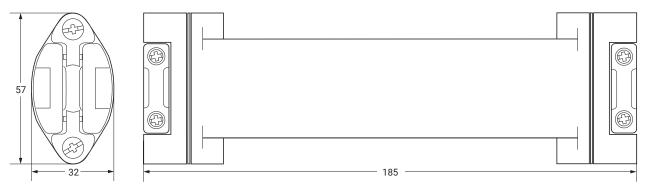

Technical details

| Heating cable capability | BTV-CR, BTV-CT, QTVR-CT, XTVR-CT | | |
|----------------------------------|--|--|--|
| Power cable capability | For use with nVent RAYCHEM's high temperature power cable C-150-PC or for use with other flexible cable such as: H07RN-F, Silicone insulated cables. Minimum and maximum installation and operating temperatures, given by cable manufacturer, have to be considered by designer and installer. | | |
| Power cable dimension | -> outer diameter range 6.8 mm - 12.6 mm -> 3 stranded copper conductors (3 x 2.5 mm² or 3 x 1.5 mm²) -> temperature range depending on the application | | |
| Maximum power cable length | Depending on power cable voltage drop and maximum current for nVent RAYCHEM power cable C-150-PC (3 x 2.5 mm²): CB 16 A 40 m CB 20 A 32 m CB 25 A 25 m | | |
| Ingress protection | IP66 | | |
| Minimum installation temperature | −55°C | | |
| Maximum pipe temperature | Refer to heating cable specification | | |
| Maximum operating voltage | 277 Vac | | |
| Maximum current rating | Depending on power cable and 40 A maximum | | |

Construction materials

| Housing, end plate, shim and spacer | Engineering polymers, black |
|-------------------------------------|-----------------------------|
| Sealing grommets | Silicone rubber |
| Screws, compression spring | Stainless steel |

APPROVALS

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust) Class I Zone 1

Temperature classification

Temperature classification is defined by the complete system.

Product certification













For certifications in other regions (FM, CSA, IEx etc.), please refer to the installation manual.

More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.



ORDERING INFORMATION


| Part description | C-150-E | | |
|------------------|--|--|--|
| PN (Weight) | 073704-000 (0.4 kg/0.8 lb) | | |
| Pack size | 1 bag | | |
| Accessories | | | |
| Power cable | C-150-PC 3-core flexible power cable for connection to C-150-E, 3 x 2.5 mm ² , silicone insulation, temperature range: -40°C to +180°C, short term: 215°C | | |





Cold applied low profile power connection (Ex)

PRODUCT OVERVIEW

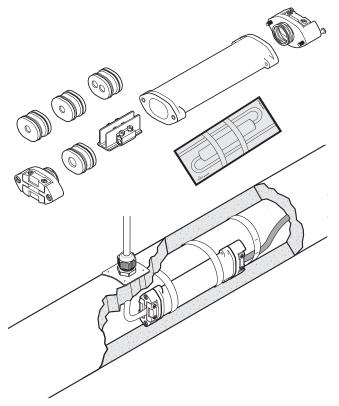

The nVent RAYCHEM CS-150-UNI-PI is a universal low profile heating cable connector for the direct connection of single conductor Polymer Insulated (PI) series heating cables. It can be used in different configurations: for the connection of a cold lead to a heating cable (Variant C), as an under insulation connecting system for the connection of a three core power cable to a heating cable loop (Variant L), as well as for splicing two heating cables (Variant S).

The connector is certified for use in hazardous areas and doesn't require a hot work permit. The electrical connection is realized by means of screw terminals, so no special crimp tools are required. If used as a connection kit, an additional gland needs to be ordered separately.

Application

"Cold" applied connection/splice for a single conductor polymer insulated (PI) series heating cables with an external diameter between 3.2 and 6.4 mm. In hazardous area use only with ATEX approved heating cable.

The CS-150-UNI-PI can be used in different configurations:

- Connection of a heating cable to a cold lead cable 1 x 2.5 mm² or 1 x 4 mm² (Variant C)
- Connection of a heating cable to a power cable 3 x 2.5 mm² (Variant L)
- Splice of two heating cables (Variant S)

Kit contents

1 x temperature resistant and impact proof body

1 x screw terminal block

4 x rubber seals (to be used according to application)


2 x strain relieve clamps with screws

1 x identification label

1 x tube of lubricant

1 x installation instruction

Dimensions (in mm)

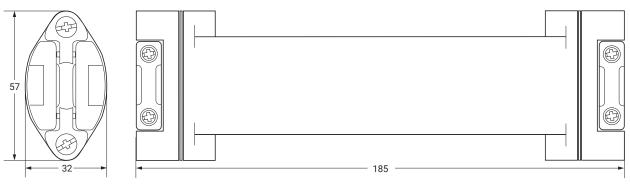

Heating cable types

| Heating cable capability | XPI-F, XPI and XPI-S polymer insulated (PI) series resistance cable, for other types contact nVent. | |
|--|--|--|
| Materials of construction | | |
| Housing, connection | Glass fibre reinforced temperature resistant engineering plastic | |
| Support ring, spacer, screws and spring | Stainless steel | |
| Cable seals | Silicon rubber | |
| Technical Details | | |
| Maximum operating temperature (*) | Power on: 180°C (may be limited by the temperature resistance of the supply cable) Power off: 200°C (using variant L, dependent on the type of supply cable e.g. 200°C for silicon cables, unless the power cable connection is bent sufficiently far away from the heated surface). | |
| Minimum installation temperature | -50°C | |
| Max. operating voltage | Variant C and S = 750 Vac Variant L = 420 Vac | |
| Max. allowed wattage | The max. allowed cable output is limited depending on the application. Refer to the installation instruction for details. | |
| Variant S: 32 A Variant C with 1 x 2.5 mm² supply cable: 25 A Variant C with 1 x 4 mm² supply cable: 32 A Variant L with 3 x 2.5 mm² supply cable up to 150°C: 25 A | | |

Variant L with 3 x 2.5 mm² supply cable 151°C to 180°C: 20 A

Supply cable dimensions

- Multi-stranded copper conductors 3 x 2.5 mm², Ø 6.8–12.6 mm
- Single conductor cold lead, max. 1 x 4 mm², Ø 3.2-6.4 mm

Supply cable requirements

The maximum permissible voltage drop is to be taken into consideration when selecting the cross-section of the power cable. The maximum working temperature of the CS-150-UNI-PI can be reduced through the maximum permitted continuous use temperature of the supply cable, unless the supply cable is laid (at a sufficient distance from the heated surface) so that the maximum permitted continuous use temperature will not be exceeded. A suitable power cable is the silicon insulated cable type C-150-PC.













For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

Particular measures to maintain the T-classification of polymer insulated heating cables are to be taken in accordance with the appropriate EC - Type examination certificate (also refer to installation instructions).

Type examination certification applies for the use of ATEX certified polymer insulated (PI) series heating cables.

The temperature class will depend on the system.

Product certification













More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

CS-150-UNI-PI Order reference A45371-000 (0.4 kg) Part number (Weight)

(*) For the full range of technical design details of the CS-150-UNI-PI refer to the installation instructions (INSTALL-064)

Accessories

| Cable gland | GL-55-M25 hazardous area approved gland for, 8−15 mm, up to −55°C |
|-----------------------|---|
| Glands for PI heaters | C20-PI-PA-KIT Hazardous area approved gland, PA, up to −40°C |
| | C20-PI-M0-KIT Hazardous area approved gland, Ni plated brass, up to −55°C (to be used with boxes with integral earth plate or with earth lug) |




CS-150-xx-PI



CONNECT AND PROTECT

Cold applied connection and splice kit with silicone sealing for Polymer Insulated (PI) heating cables (Ex)

PRODUCT OVERVIEW

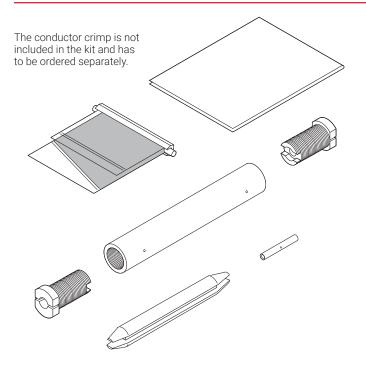

The kits nVent RAYCHEM CS-150-xx-PI are designed to connect a PI cold lead cable to a polymer insulated (PI) series heating cable as well as to splice two PI heating cables. The kit employs a two component silicone compound to provide durable and flexible moisture proof encapsulation.

Electrical continuation is maintained via specially engineered crimps that provide a highly reliable electrical connection.

It is very important that the electrical crimp connections are performed with the correct crimp tool (PI-TOOL-xx).

Due to its low profile design, the connection can be easily installed under the insulation directly on the pipe. If used as a connection kit, a cable gland, an insulation entry kit as well as a crimp for the connection between the cold lead and the heating cable, need to be ordered separately. If used as a splice kit, just the heating cable conductor crimp is needed additionally.

For simplified installation- and maintenance work, we offer a crimp toolbox that contains the suitable installation tool, crimping dies and a variety of crimps exactly matching common cable types. For all details concerning the crimping system, refer to the datasheet of the electrical connection system for PI heating cables (PI-TOOL-SET-xx).

Application

Cold applied silicone sealed connection/splice for PI heating cables.

Kit contents

1 x PTFE body

2 or 3 x PTFE plugs (depending on kit)

1 x PTFE crimp separator

1 x two component silicone compound in plastic bag (shelf life is 12 months)

2 x braid crimps

1 x identification label

1 x multilingual installation instruction





Components





Dimensions (in mm)

CS-150-2.5-PI: Overall length ~120 mm, Ø ~17 mm CS-150-6-PI: Overall length ~120 mm, Ø ~26 mm CS-150-25-PI: Overall length \sim 135 mm, Ø \sim 35 mm

Technical details

| | CS-150-2.5-PI | CS-150-6-PI | CS-150-25-PI |
|-------------------------------|--|------------------------|--------------------------|
| Max. operating temperature | 200°C continuous, (260°C intermittent) | | |
| Min. installation temperature | -50°C | | |
| Max. operating voltage (U0/U) | 450/750 Vac nominal | | |
| Max. operating current | Only limited by heating cable used | | |
| Cable/Cold leads | Up to 2.5 mm ² | 4 to 6 mm ² | 10 to 25 mm ² |

APPROVALS

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

Temperature classification is defined by the complete system.

Product certification













More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

| Order reference | CS-150-2.5-PI | CS-150-6-PI | CS-150-25-PI |
|----------------------|----------------------|----------------------|----------------------|
| Part number (Weight) | 1244-000586 (0.1 kg) | 1244-000588 (0.2 kg) | 1244-000587 (0.3 kg) |

Accessories

| Cable gland for PI connection kit | C20-PI-PA-KIT Hazardous area approved gland, PA, up to -40°C |
|---|---|
| (one per piece of cold lead connection; to be ordered separately) | C20-PI-M0-KIT Hazardous area approved gland, Ni plated brass, up to -55°C (to be used with boxes with integral earth plate or with earth lug) |


CS20-2.5-PI-NH



CONNECT AND PROTECT

Heat-shrink connection or splice kit for PI heating cables

PRODUCT OVERVIEW

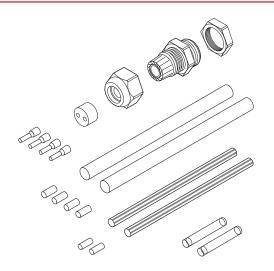

The nVent RAYCHEM CS20-2.5-PI-NH kit is designed for terminating polymer insulated (PI) series resistance heating cables.

The CS20-2.5-PI-NH may be used in non-hazardous areas only. The kit contains components required for the installation of either: a connection of (2) cold leads- to a heating cable or for (2) splices between two heating cables. The splice kit employs easy to use heat shrinkable tubing that after installation forms a semi-flexible moisture proof encapsulation. Electrical continuation is maintained via crimps for both conductor and braid. Thanks to its low profile design the finished connection can be easily installed under the insulation directly on the pipe. The kit is designed for use with junction boxes with M20 entries.

Each CS20-2.5-PI-NH kit contains 2 connection sets. The crimps must be installed using an appropriate crimp tool (CW-CT-KIT or equivalent).

Application

Heat shrink based connection/splice kit for single core polymer series resistance heating cable. Only use with PTFE sheathed cables (XPI and XPI-S).

Kit contents

4 x heat shrinkable tubes (PTFE/FEP)

2 x green/yellow tube for the braid

6 x crimp connectors (crimp for conductor and braid)

1 x polyamide gland with dual hole sealing grommet M20 threaded, suitable for cables ranging from 4.8 to 7 mm diameter

1 x installation instruction

PRODUCT SPECIFICATIONS

Dimensions

Overall length ~130 mm, ø ~10 mm

Technical data

| Max. cold lead size | 2,5 mm ² |
|-------------------------------|---------------------|
| Max. operating temperature | 205°C |
| Min. installation temperature | -50°C |
| Max. operating voltage | 750 Vac |
| Max. operating current | 25 A |





Components







For use in ordinary area only.

More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

| Order reference | CS20-2.5-PI-NH |
|----------------------|----------------------|
| Part number (Weight) | 1244-000585 (0.1 kg) |










CCON20-100-PI

CONNECT AND PROTECT

RAYCHEM

Cold applied conduit connection kit 🖾

PRODUCT OVERVIEW

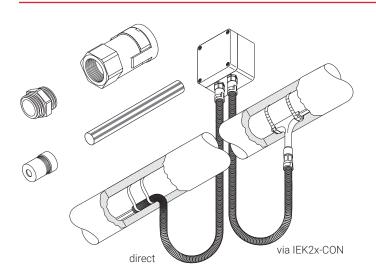

This connection kit is designed for terminating the full range of nVent RAYCHEM XPI polymer insulated series heating cables and cold leads in to a junction box, as well as providing a reliable and sealed connection to a conduit system.

It is approved for use in hazardous locations. The conduit system will provide supplementary mechanical protection of the heating cable or cold lead between a junction box and the entry into the insulation. The conduit connection is fast and reliable and allows simple installation whilst maintaining at all time an IP66 seal.

The kit can be used with various types of conduits which can be cut-to-length as required in the field. The kit exists in three different versions, depending on the outer diameter of the heating cable or cold lead to protect. The conduit and possibly required insulation entry kit need to be purchased separately.

Application

Connection kit with conduit adaptors for 2 PI series heating cables or cold lead cables

Kit contents

2 metal gland bodies,

2 conduit adaptors including safety retention clip,

2 grommets,

2 green/yellow tubes for braid,

1 installation instruction (multilingual)

PRODUCT SPECIFICATIONS


Dimensions

| | CCON20-100-PI-A | CCON20-100-PI-B | CCON20-100-PI-C |
|-------------------------|-----------------|-----------------|-----------------|
| PI cable diameter range | 4.0 – 6.5 mm | 6.5 – 9.5 mm | 9.5 – 13 mm |

Technical details

| Thread size | M20 x 1.5 |
|------------------------------|--|
| Conduit compatibility | ND 17 mm, nVent RAYCHEM conduits type CCON20-C |
| Ambient temperature | -55°C to +40°C |
| IP ingress protection rating | IP66 |
| Surface resistance | < 1 $\mbox{G}\Omega$ according to the requirements of EN 60079-0 and EN 61241-0 for use in hazardous areas |

Components



Temperature classification

Temperature classification is defined by the complete system.

Product certification





More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

| Part description | CCON20-100-PI-A | CCON20-100-PI-B | CCON20-100-PI-C |
|------------------|----------------------|----------------------|----------------------|
| PN (Weight) | 1244-003274 (0.1 kg) | 1244-003276 (0.1 kg) | 1244-003278 (0.1 kg) |

Accessories

For suitable conduits and insulation entry kits refer to the datasheet for CCON2x-C...



Cold applied under insulation low profile splice (Ex)

PRODUCT OVERVIEW



The nVent RAYCHEM S-150 is a cold applied low profile splice for in-line connection. This universal kit fits with all nVent RAYCHEM industrial heating cables, BTV, QTVR and XTVR, meaning simplified product selection and reduced inventory to stock. It can be used in applications with temperatures ranging from -55°C to 200°C. It is approved for use in hazardous areas.

The unique design of the S-150 suits the demanding requirements of the industrial environment. The low profile housing can be installed on pipes and other surfaces. Spring loaded grommets make a first seal to maintain a water tight connection while the non-curing sealant (silicone free) used in nVent RAYCHEM's core sealer adds a second seal, providing additional protection. The rugged construction of the splice makes it resistant to impact and suitable for high temperature variations and aggressive chemical exposure. The connection is made using screw terminals. The splice is re-enterable. The S-150 is a safe under the insulation in-line splice that can be relied upon over time.

The splice requires no heat source for installation, making maintenance work fast and easy. Each kit contains all the necessary materials to do one in-line splice connection.

Description

Cold-applied in-line splice kit for use with BTV, QTVR and XTVR heating cables.

Kit contents

1 splice housing

2 sealing grommets

2 core sealers

1 spacer including screw terminals

1 identification label







Components






Dimensions (in mm)



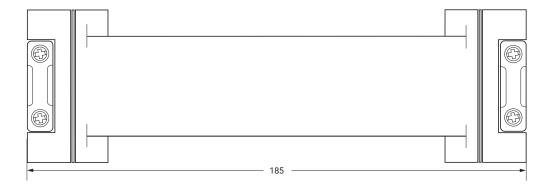

Technical details





BTV-CR, BTV-CT, QTVR-CT, XTVR-CT **IP66** -55°C

Minimum installation temperature Maximum pipe temperature

150°C POWER ON and 200°C POWER OFF

Connection method

Screw terminals 277 Vac

Maximum operating voltage Maximum current rating

40 A heating cable circuit

Materials of construction

Housing, end plate, shim and spacer

Engineering polymers, black


Sealing grommets

Silicone rubber

Screws, compression spring

Stainless steel

APPROVALS



Temperature classification

Temperature classification is defined by the complete system

Product certification













For certifications in other regions (FM, CSA, IEx etc.), please refer to the installation manual.

More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

S-150

ORDERING INFORMATION

| , | Splice connection | | |
|---|-------------------|--|--|
| | | | |

PN (Weight) 497537-000 (0.4 kg/0.8 lb.)












Heat-shrink under insulation in-line splice kit €x

PRODUCT OVERVIEW

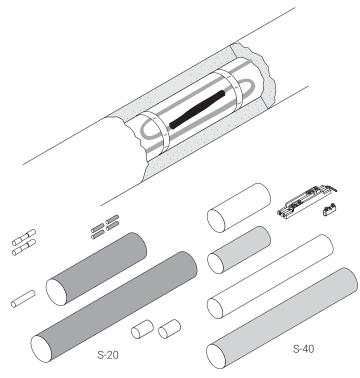

These splice kits are designed for the in-line joining of nVent RAYCHEM BTV, QTVR, XTVR, HTV and VPL self-regulating heating cables.

The nVent RAYCHEM S-20 kit is designed for use with BTV and QTVR heating cables and the S-40 kit is for use with XTVR, HTV and VPL heating cables.

All kits are approved for use in hazardous areas.

The splice kits employ easy to use heat-shrinkable tubing with an adhesive, that when heated, forms a semi-flexible moisture proof encapsulation. The S-40 kit is supplied with a removable caddy to make the installation quick and easy.

The S-20 kit uses crimp electrical connections, while the S-40 kit utilizes screws terminals.

Due to their low profile designs, the finished splices can be installed under the insulation, directly on the pipe.

Components





Application

| S-20 | S-40 |
|--|---|
| In-line splice kit for BTV and QTVR heating cables | In-line splice kit for XTVR, HTV and VPL heating cables |

Kit contents

| | Heat shrinkable sleeves Crimp splice connectors | Heat shrinkable sleeves, with installation aid, screw terminals and an allen (hex) wrench |
|--|--|---|
|--|--|---|

PRODUCT SPECIFICATIONS

Technical details

| | S-20 | S-40 |
|------------------------------|--|--|
| Maximum exposure temperature | 110°C (230°F) | 260°C (500°F) |
| Maximum current rating | 35 A (with QTVR cables) | |
| Final dimensions | Length approximately 180 mm (7 inches) Diameter approximately 20 mm (0.8 inches) | Length approximately 300 mm (11.8 inches) Diameter approximately 20 mm (0.8 inches) |
| Minimum ambient temperature | -60°C (-76°F) | -60°C (-76°F) |

Installation details

| Gas torch or equivalent | Minimum 1460 W hot air gun | Minimum 3000 W hot air gun |
|----------------------------------|----------------------------|----------------------------|
| Minimum installation temperature | -20°C (-4°F) | -60°C (-76°F) |

nVent.com/RAYCHEM | 135



Temperature classification is defined by the complete system.



For use in ordinary and hazardous area Zone 1 (Gas), Zone 21 (Dust) and Div 2







More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

Temperature classification

| Part description | S-20 | S-40 |
|------------------|-----------------------|-----------------------|
| PN (Weight) | 1244-022490 (0.05 kg) | 1244-022492 (0.11 kg) |

The installation of the S-40 requires a high power heat gun and an experienced installer.














Splice or tee connection kit ⟨€x⟩

PRODUCT OVERVIEW

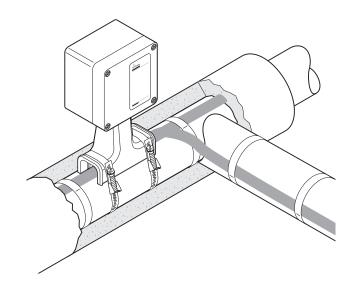

The nVent RAYCHEM T-100 is an above-insulation splice or tee kit, designed for use with up to three nVent RAYCHEM BTV, QTVR, XTVR, HTV or VPL industrial parallel heating cables. It is approved for use in hazardous locations.

The rugged stand protects the heating cable and allows for up to 100 mm (4") of thermal insulation.

The core sealing boot does not require a heat gun or torch for the installation (no hot work permit necessary).

The non-curing sealant (silicone free) in the boot allows easy installation and facilitates maintenance.

The T-100 significantly reduces installation and maintenance time and effort.

Components





This kit is an above-insulation splice/tee, appropriate for use worldwide with no requirements for local customization.

Kit contents

1 splice/tee enclosure and lid

1 stand assembly

3 core sealers

3 green/yellow earthing sleeve

3 compression crimps

3 crimping insulating tubes

1 polywater sachet

1 spanner

1 strain relief assembly


2 grommet plugs

1 installation instruction





Dimensions (nominal)

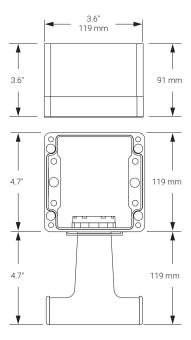

Technical details

| Heating cable capability | BTV-CR, BTV-CT, QTVR-CT, XTVR-CT, HTV-CT, VPL |
|-----------------------------------|--|
| Ingress protection | NEMA Type 4X IP66 |
| Min. installation temperature | −55°C |
| Max. pipe temperature | Refer to heating cable specification |
| Ambient temperature range: | −55°C to +56°C |
| Max. operating voltage | 277 Vac for FM, CSA, 480 Vac for PTB |
| Max. continuous operating current | 50 A heating cable circuit for NEC/CEC as approved by CSA and FM 40 A heating cable circuit for IEC as approved by PTB |

Materials of construction

| Enclosure, lid, and stand | Electrostatic charge-resistant glass-filled engineered polymer, black |
|---------------------------|---|
| Lid screws | Stainless steel |
| Lid gasket | Silicone rubber |

APPROVALS

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust) and Class I Div 2 (Groups A, B, C, D), Class II Div 1 (Groups E, F, G) and Class III

Temperature classification

Temperature classification is defined by the complete system.

Product certification













For certifications in other regions (FM, CSA, IEx etc.), please refer to the installation manual.

More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

| Part description | T-100 |
|------------------|-----------------------------|
| PN (Weight) | 447379-000 (2.5 lb /1.2 kg) |

Accessories

| Crimp tool | T-100-CT (not included in the kit, equivalent to Panduit: CT-1570) | |
|-----------------------------------|---|--------------------------------------|
| | PN | 954799-000 |
| | | T-100-CRIMP-KIT (spare part only) |
| Spare crimps and insulating tubes | T-100-CRIMP-KIT (spare part only) | |
| | PN | 577853-000 |
| Junction box standoff | For insulation thickness >100 mm & ≤150 mm * | |
| | Catalog number | JBM-100-STANDOFF |
| | Part number | P000003624 |
| | Weight | 0.599 lb / 272 g |
| | * Consider extra pipe strap length 6-9" (150-225 mm) for attachment | |
| Small pipe adapter | Required for stand on pipes ≤1" | |
| | Catalog number | JBM-SPA |
| | Part number | D55673-000 |
| | Weight | 0.930 lb / 422 g (Bag of 5 adaptors) |














Integrated junction box for direct connection of XPI heaters 🖘

PRODUCT OVERVIEW

JB-SPLICE-PI-E

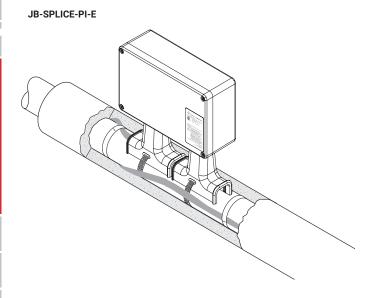

The nVent RAYCHEM JB-SPLICE-PI-E kit is designed to splice nVent RAYCHEM XPI industrial series heating cables directly without the use of cold leads and with certain power and current restrictions.

The system is approved for hazardous areas and integrates the function of connection kits, cold leads and insulation entry kits. This simplifies the Bill of Materials and actual installation by eliminating the need for special tools or craft sensitive connections.

The XPI heating cables are directly connected into springtype terminals to provide a fast, reliable and maintenance free operation. This connection system significantly reduces installation time.

The design validation depends on cable type, power and temperature and is captured in our design software packages such as TraceCalc Pro.

Application

This kit is for use in regions adhering to the IEC standards and allows the splicing of both monophase or triphase circuits with nVent RAYCHEM XPI series cables of type XPI-(S-)1000 up to XPI-(S-)1.8 without the use of cold leads.

Kit contents

1 junction box with spring-type terminals

2 stand assemblies

6 green/yellow earthing sleeves

4 sealing pins

4 grommets (2 premounted for small cables, 2 for large cables)

1 stand wrench

2 strain relief assemblies

1 polywater sachet













| | (260 mm) | |
|--------------------|------------------|---|
| 3.5 in (90 mm) | | 7 |
| | 10.2 in (260 mm) | - |
| 6.3 in (160 mm) | | |
| 4.8 in (122 mm) | | |


Technical details

| Heating cables | XPI-1000 up to XPI-1.8 XPI-S-1000 up to XPI-S-1.8 (XPI-F not allowed) |
|----------------------------------|--|
| Ingress protection | IP66 |
| Ambient temperature range | −55°C up to +56°C |
| Minimum installation temperature | −55°C |
| Max continuous pipe temperature | 160°C* |
| Terminals | 16 mm² Spring-type terminals (terminal configuration & types cannot be altered w/o consulting nVent) |
| Max conductor size | 16 mm² stranded and solid |
| Max operating voltage | 550 Vac |
| Max continuous operating current | 45 A* |
| Max start-up current | 70 A* |
| | |

^{*} Different current and power restrictions apply for different ambient temperatures, pipe temperatures and cable types. Use nVent design software packages to validate the usage for your application.

Materials of construction and weight

| Enclosure, lid and stand | Electrostratic charge resistant glass-filled engineered polymer (Black) |
|--------------------------|---|
| Lid screws | Stainless steel (captive screws) |
| Lid gasket | Silicone rubber |
| Weight | 2.7 kg |



Temperature classification

Temperature classification is defined by the complete system.

Product certification











More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING DETAILS

| Part description | JB-SPLICE-PI-E |
|------------------|----------------|
| PN | P000004430 |
| | |

Accessories

| Small pipe adaptor | JBM-SPA, required for pipes ≤1" (DN 25) (bag of 5 adaptors). Requires 2 pieces per junction box |
|--------------------|--|
| | |












E-100-E and E-100-L-E

CONNECT AND PROTECT

RAYCHEM

End seal and lighted end seal 🖘

PRODUCT OVERVIEW

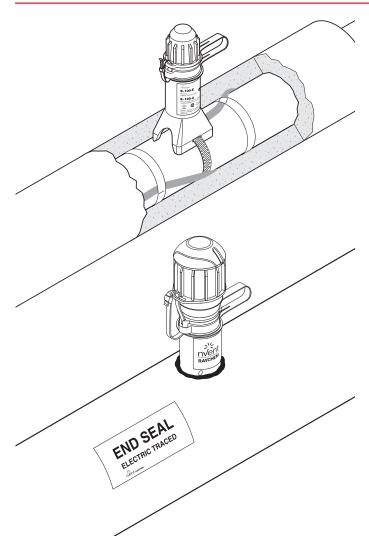

Both the nVent RAYCHEM E-100-E and E-100-L-E are accessible, re-entrable end seals, the E-100-E without a light, the E-100-L-E with a signal light. Both end seals can be used with all nVent RAYCHEM BTV, QTVR, XTVR, HTV or VPL industrial parallel heating cables. They are approved for use in hazardous areas. They are extremely rugged - made of a strong, moulded part with 4 mm wall thickness.

The heating cable is firmly kept in place by the integral strain relief.

Sealing is done twice. First a dry compartment for the heating cable is created, then a boot filled with a non-curing sealant (silicone free) is placed over the end of the heating cable inside the compartment.

The end seals are mounted on the pipe and project through the cladding.

The light module of the E-100-L-E uses an array of super-bright green LEDs for long life and excellent visibility from almost any angle. The robust industrial-grade electronics are encapsulated to reliably seal out moisture.

Extra sealant filled boots for the E-100-E end seal can be ordered separately.

Kit contents

| E-100-E | E-100-L-E |
|---|---|
| 1 end seal 1 cable tie 1 polywater sachet 1 installation instruction | 1 end seal with indicator light 1 cable tie 1 polywater sachet 2 insulated parallel crimps 1 core sealer 1 installation instruction |





Technical details

| | E-100-E | E-100-L-E |
|-------------------------------|---|---|
| Max. pipe temperature | Refer to heating cable specification (absolu | te maximum is 260°C) |
| Max. operating voltage | 277 V* (480 V VPL4 only) | 277 V |
| | *Extra conditions for safe use apply for volta Please refer to the certificate or installation | ages above 277 V. instructions for full details. |
| Ambient temperature range | -55°C to +56°C* | -40°C to +40°C |
| | *Extra conditions for safe use apply for amb Please refer to the certificate or installation | |
| Min. installation temperature | -55°C | -40°C |
| Overall height | 171 mm | 197 mm |
| Outer diameter | 46 mm Usable with up to 100 mm thermal insulation | 66 mm |
| Ingress protection | IP66, Type 4X | IP66, Type 4X |
| Impact resistance | EN 60079-30-1, ≥ 7 joules | EN 60079-30-1, ≥ 7 joules |
| UV stability | No degradation after > 1000 h | No degradation after > 1000 h |
| Solvent resistance | Excellent | Excellent |
| Strain relief | > 250 N | > 250 N |

Light source

| | E-100-E | E-100-L-E |
|------------------------------------|---------|---|
| Туре | | Green LEDs |
| Voltage rating range | | 110-277 Vac, 50/60 Hz |
| Power consumption | | < 2 W |
| Electromagnetic immunity/emissions | | Complies with IEC61000-6 and IEC61000-4 |

Installation data

| Tools required | Cable knife, wire cutters, screwdriver | Cable knife, wire cutters, screwdriver, |
|----------------|--|---|
| | | crimp tool (Panduit-CT-100), long nose |
| | | pliers |

APPROVALS

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust) Class I Div 2, Class II Div 1 and 2, and Class III

Temperature classification

Temperature classification is defined by the complete system.

Product certification

Present logos of available certificates













For certifications in other regions (FM, CSA, IEx etc.), please refer to the installation manual.

More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

End seal

| Part description | E-100-E | E-100-L-E |
|------------------|--|--|
| PN (Weight) | 101255-000 (0.22 kg) Requires one pipe strap (not supplied) | P000001583 (0.63 kg) Requires one pipe strap (not supplied) |

Accessories

| Junction box standoff | For insulation thickness >100 mm & ≤150 mm * | |
|-----------------------|---|--------------------------------------|
| | Catalog number | JBS-100-STANDOFF |
| | Part number | P000003408 |
| | Weight | 0.297 lb / 135 g |
| | * Consider extra pipe strap length 6-9" (150-225 mm) for attachment | |
| Small pipe adapter | Required for stand on pipes ≤1" | |
| | Catalog number | JBS-SPA |
| | Part number | E90515-000 |
| | Weight | 0.408 lb / 185 g (Bag of 5 adaptors) |

Spare part

| Boot pack for E-100-E | Part description | E-100-BOOT-5-PACK |
|---|------------------|---|
| | PN (Weight) | 281053-000 (140 g) |
| | Pack size | 5 sealant filled boots and 5 cable ties |
| Replacement indicator light for E-100-L | Part description | E-100-LR-E |
| | PN (Weight) | P000001586 (450 g) |











DRAFT 01




E-150

CONNECT AND PROTECT

Low profile end seal-cold applied (Ex)

PRODUCT OVERVIEW

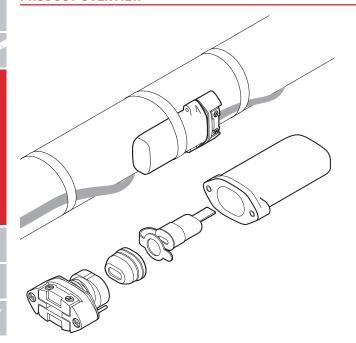

The nVent RAYCHEM E-150 is a cold applied low profile end seal. This universal end seal is designed to fit with all nVent RAYCHEM industrial self-regulating heating cables; BTV, QTVR and XTVR meaning simplified product selection and reduced inventory to stock. It can be used in applications with temperatures ranging from -55°C to +200°C. It is approved for use in hazardous areas.

The unique design of the E-150 suits the demanding requirements of the industrial environment. The low profile housing can be installed on pipes and other surfaces. A spring loaded grommet makes a first seal to maintain a water tight connection while the non-curing sealant (silicone free) used in nVent RAYCHEM's core sealing boot adds a second seal, providing additional protection. The rugged construction of the end seal makes it resistant to impact and suitable for high temperature variations and aggressive chemical exposure. The end seal is re-enterable. The E-150 design provides a safe under the insulation end seal that can be relied upon over time.

The end seal requires no heat source for installation, making maintenance fast and easy. Each kit contains all the necessary materials to do one end termination.

Description

Cold applied end seal for use with BTV, QTVR and XTVR heating cables.

Kit contents

1 end seal enclosure housing

1 sealing grommet assembly


1 core sealing boot

1 identification label

1 installation instruction

PRODUCT SPECIFICATIONS

Dimensions (in mm)

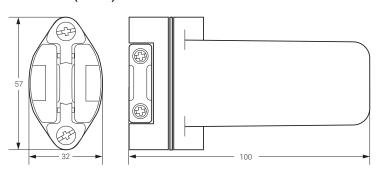

Technical details

| Heating cable capability | BTV-CR, BTV-CT, QTVR-CT, XTVR-CT |
|----------------------------------|------------------------------------|
| Ingress protection | IP66 |
| Minimum installation temperature | -55°C |
| Maximum pipe temperature | 150°C POWER ON and 200°C POWER OFF |
| Operating voltage | 277 V |

Materials of construction

| Enclosure, end plate, and shim | Engineering polymers, black |
|---|-----------------------------|
| Sealing grommet and core sealer | Silicone rubber |
| Screws, compression spring, reinforcement plate | Stainless steel |

APPROVALS

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust) Class I Div 2, Class II Div 2, Class III

Temperature classification

Temperature classification is defined by the complete system.

Product certification













For certifications in other regions (FM, CSA, IEx etc.), please refer to the installation manual.

More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

| End seal | E-150 |
|-------------|-----------------------------|
| PN (Weight) | 979099-000 (0.3 kg/0.6 lb.) |










CONNECT AND PROTECT

Cold applied end seal kit

PRODUCT OVERVIEW

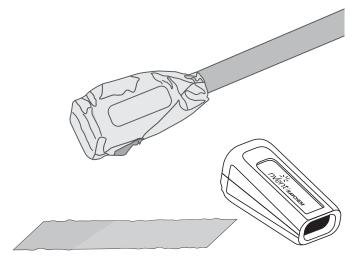

nVent RAYCHEM End Seal E-02-AL is a cold applied end seal kit for termination of nVent RAYCHEM BSA heating cables in ordinary (non-hazardous) area.

This kit is quick and easy to install without the need of a heat gun.

Kit content

1 x end seal with gel filling

1 x protective aluminium tape

PRODUCT SPECIFICATIONS

| Rated voltage | 230 Vac |
|--|--------------|
| Ingress protection | IP68 |
| Min installation Temp | -20°C |
| Max maintain or continuous exposure T (power on) | 65°C |
| Max exposure T (power off) | 85°C |
| Material | Grey polymer |

APPROVALS

For use in ordinary area

Product certification





ORDER INFORMATION

| Part description | E-02-AL |
|----------------------|-----------------------|
| Part number (weight) | 1244-020913 (0.03 kg) |

0




E-20 and E-40

CONNECT AND PROTECT

Heat-shrink under insulation end seal kits 🖘

PRODUCT OVERVIEW

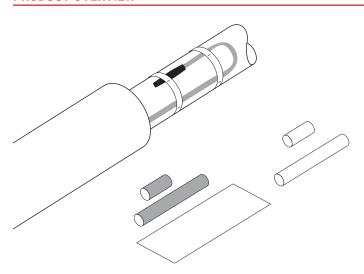

These end seal kits are designed for the termination of nVent RAYCHEM BTV, QTVR, XTVR, HTV and VPL self-regulating heating cables.

The nVent RAYCHEM E-20 is designed for use with BTV and QTVR heating cables and the nVent RAYCHEM E-40 is designed for use with XTVR, HTV and VPL heating cables. All kits are approved for use in hazardous areas.

The end seal kit E-20 employs easy to use heat-shrinkable tubing with an adhesive, that when heated forms a semi-flexible moisture proof encapsulation. The end seal kit E-40 employs high temperature heat-shrinkable tubing with a plastic melt liner that when heated forms a semi-flexible moisture proof encapsulation. Due to the low profile design, the finished termination can be installed directly on the pipe.

One end seal kit is required for each termination.

Application

| | E-20 | E-40 |
|--------------|--|---|
| | End seal for BTV and QTVR self-regulating heating cables | End seal for XTVR and HTV self-regulating and VPL power-limiting heating cables |
| Kit contents | | |

Kit contents

| Heat-shrinkable adhesive coated sleeves Installation instruction Aluminum tape | Heat-shrinkable sleeves Installation instruction |
|--|---|
|--|---|

PRODUCT SPECIFICATIONS

Technical details

| | E-20 | E-40 |
|------------------------------|---|---|
| Maximum exposure temperature | 110°C (230°F) | 260°C (500°F) |
| Final dimensions | Length approximately 120 mm Diameter approximately 20 mm | Length approximately 120 mm Diameter approximately 20 mm |
| Minimum ambient temperature | -60°C (-76°F) | -60°C (-76°F) |

Installation details

| Gas torch or equivalent | Minimum 1460 W hot air gun | Minimum 3000 W hot air gun |
|----------------------------------|----------------------------|----------------------------|
| Minimum installation temperature | -20°C (-4°F) | -60°C (-76°F) |

YCHEM-DS-EU1636-E20E40-EN-2401 nVent.com/RAYCHEM | 149

Product certification



Temperature classification



Temperature classification is defined by the complete system.



For use in ordinary and hazardous area Zone 1 (Gas), Zone 21 (Dust) and Div 2





For certifications in other regions (FM, CSA, IEx etc.), please refer to the installation manual.

More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

| Part description | E-20 | E-40 |
|------------------|-----------------------|-----------------------|
| PN (Weight) | 1244-022489 (0.03 kg) | 1244-022491 (0.06 kg) |

The installation of the E-40 requires a high power heat gun and an experienced installer.














CONNECT AND PROTECT

Conduit for protection of heating cables

PRODUCT OVERVIEW

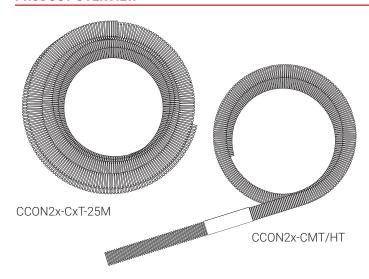

These conduits have been designed for use in combination with the conduit connection kits nVent RAYCHEM CCON2x-100-... They provide supplementary mechanical protection of the heating cable or cold lead between a junction box and the entry into the insulation. The conduit materials have been selected to meet the requirements for use in hazardous locations.

The resistance of the conduits to fuels, mineral oils, fats, alkalies, acids and bases is excellent.

The conduits can be cut-to-length as required in the field and can either be entered in the insulation directly or by use of an insulation entry kit.

Application

Conduit for protection of heating cables

Kit content

| | M20 | M25 |
|--------------------|---|---|
| | CCON20-CHT | CCON25-CHT |
| Pipe stands | 2 | 1 |
| Conduit connectors | 2 | 1 |
| Pipe straps | Pipe straps need to be ordered separately | Pipe straps need to be ordered separately |

PRODUCT SPECIFICATIONS

Technical details

| | M20 | M25 |
|------------------------------------|---|------------|
| | CCON20-CHT | CCON25-CHT |
| Medium temperature conduit (150°C) | | |
| Conduit size | ND 17 mm | ND 23 mm |
| Outer diameter (nominal) | 21.2 mm | 28.5 mm |
| Bending radius (static) | 40 mm | 45 mm |
| Weight (kg/100 m) | 5.7 | 9.9 |
| Material | Modified polyamide | |
| Temperature range (continuous) | -40°C to +135°C (compatible with surface temperature of all heating cables) | |
| Exposure temperature | 150°C (3000 h intermittent, cumulative) | |
| Impact strength | Minimum 6 J @ -40°C (empty conduit), min. 7 J with all heating cables | |
| Flame class | HB as per UL 94 | |







Components









| | M20 | M25 | |
|----------------------------------|--|---|--|
| | CCON20-CHT | CCON25-CHT | |
| High temperature conduit (260°C) | | | |
| Conduit size | ND 17 mm | ND 23 mm | |
| Oute | 21.1 mm | 28.8 mm | |
| Bending radius (static) | 15 mm | 26 mm | |
| Weight (kg/100 m) | 8.3 | 14.8 | |
| Material | PFA | | |
| Temperature range | -200°C to +260°C | -200°C to +260°C | |
| Impact strength | Minimum 2.5 J (empty conduit), min. 7 J with | Minimum 2.5 J (empty conduit), min. 7 J with all heating cables | |
| Flame class | V0 as per UL 94 | | |

Combined medium and high temperature conduit

| Ideal for direct entry into cladding for high pipe temperatures. | 1.67 m length of medium temperature conduit for connection to the junction box connected to 33 cm of high temperature conduit for connection to the hot surface. |
|--|--|
|--|--|

APPROVALS

For use in ordinary and hazardous area Zone 1 / Zone 21 and Zone 2 / Zone 22 (Gas and Dust)

Temperature classification

Temperature classification is defined by the complete system

Product certification





More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

| Conduit size | ND 17 mm | ND 23 mm |
|---|--|---|
| Pack of 2 m of medium temperature conduit | CCON20-CMT-2M (PN: 1244-003286/Weight: 0.12 kg) | CCON25-CMT-2M (PN: 1244-003281/Weight: 0.20 kg) |
| Pack of 25 m of medium temperature conduit | CCON20-CMT-25M (PN: 1244-003285 Weight: 1.44 kg) | CCON25-CMT-25M (PN: 1244-003280/Weight: 2.25 kg) |
| Pack of 2 m of high temperature conduit | CCON20-CHT-2M (PN: 1244-003289/Weight: 0.16 kg) | CCON25-CHT-2M (PN: 1244-003284/Weight: 0.28 kg) |
| Pack of 25 m of high temperature conduit | CCON20-CHT-25M (PN: 124-003288/Weight: 2.24 kg) | CCON25-CHT-25M (PN: 1244-003283/Weight: 3.90 kg) |
| 1 pc of combination med./high temperature conduit (1.67 m medium temperature with 0.33 m high temperature) | CCON20-CMT/HT-1.67/0.33M (PN: 1244-003475/Weight: 0.135 kg) | CCON25-CMT/HT-1.67/0.33M (PN: 1244-003474/Weight: 0.24 kg) |

Accessories

| Insulation entry kit comprising of pipe | IEK20-CON | IEK25-CON |
|---|-------------------|-------------------|
| stand with conduit connection system | (PN: 1244-003291) | (PN: 1244-003290) |


IEK-25-PIPE and IEK-25-04



CONNECT AND PROTECT

Insulation entry kit

PRODUCT OVERVIEW

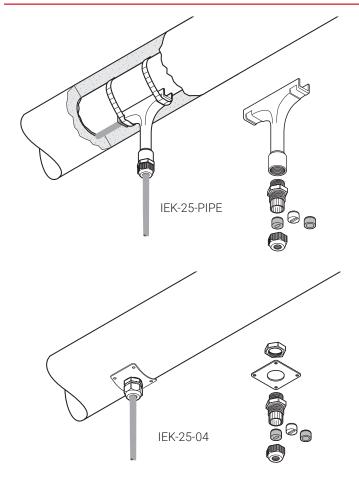

Insulation entry kits are designed to protect cables when passing through the thermal insulation cladding. The IEK's are suitable for all type of parallel heating cables as well as power cables. Insulation entry kits may be used in hazardous and non hazardous areas.

The gland and the grommet provided in the kit provide strain relief and environmental sealing to avoid water ingress in the insulation.

The nVent RAYCHEM IEK-25-PIPE contains a protective guiding tube which is fixed to the pipe and allows the heat-tracing installation to be completed independently from the insulation work. The nVent RAYCHEM IEK-25-04 contains a stainless steel plate which can be screwed to the cladding.

Insulation entry kits can be used for installations on pipes, tanks and vessels etc.







Application

| IEK-25-PIPE | IEK-25-04 |
|---|---|
| Insulation entry kit for pipe mounting for heating- and power cables with an outside diameter in the range of 8 to 17 mm. | Insulation entry kit for pipes, tanks and vessels. Usable for all types of polymer heating cables and power cables with an outside diameter in the range of 8 to 17 mm. |
| Kit contains 1 pc. | Kit contains 1 pc. |

Kit contents

| 1 x polymer "T" Tube | 1 x stainless steel fixing plate |
|--|---|
| 1 x plastic gland (M25) with round hole grommet for power cables | 1 x plastic gland (M25) with round hole grommet for power cables |
| 1 x bag with 2 silicon grommets for heating cables | 1 x bag with 2 silicon grommets for heating cables |
| | 1 x locknut |





| Height | 135 mm |
|--------|--------------------|
| Width | 120 mm |
| Plate | 60 x 60 mm (22SWG) |

Technical details

| | IEK-25-PIPE | IEK-25-04 | |
|---------------------|-------------|-----------|--|
| Max. exposure temp. | | | |
| gland | 110°C | 110°C | |
| tube | 260°C | _ | |

APPROVALS

For use in ordinary area

Product certification





ORDERING INFORMATION


| Part number (Weight) | 1244-001050 (0.13 kg) | 332523-000 (0.06 kg) |
|----------------------|-----------------------|----------------------|



CONNECT AND PROTECT

Insulation entry kit

PRODUCT OVERVIEW

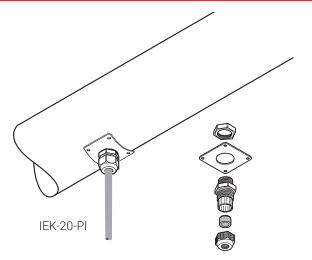

Insulation entry kits are designed to protect cables when passing through the thermal insulation cladding.

The nVent RAYCHEM IEK-20-PI is suited for PI heating cables as well as for power cables.

Insulation entry kits may be used in hazardous and non hazardous areas.

The gland and the grommet included in the kit provide strain relief and environmental sealing to avoid water ingress in the insulation. They contain a stainless steel plate which can be screwed to the cladding. Insulation entry kits can be used for installations on pipes, tanks and vessels etc.

Application

Two-pack insulation entry kit for pipes, tanks and vessels. Usable for all types of PI cold leads as well as all other round cables with an outer diameter in the range of 5 to 13 mm. Kit contains 2 pc.

Kit contents

- 2 x stainless steel fixing plates
- 2 x plastic glands (M20) with round hole grommet for power- or cold lead cables
- 2 x locknuts

PRODUCT SPECIFICATIONS

Dimensions

| Plate | 60 x 60 mm (22 SWG) |
|-------|---------------------|
|-------|---------------------|

Technical Details

Max. exposure temp. gland 80°C

APPROVALS

For use in ordinary area

Product certification



ORDERING INFORMATION

Part number (Weight) 1244-000689 (0.08 kg)









\equiv










CONNECT AND PROTECT

Surface sensing mechanical thermostat 🖾

PRODUCT OVERVIEW

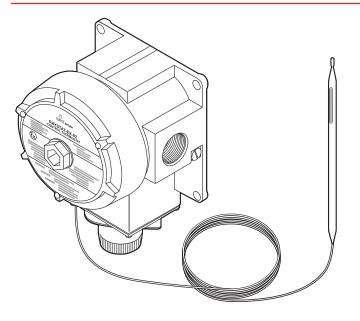

This EEx d approved surface sensing thermostat provides temperature control for all nVent RAYCHEM BTV, QTVR, VPL and XTVR heating cables in hazardous areas. The switching temperature range is -4° C to +163°C and is adjustable externally to the Ex enclosure by a dial mounted under a bolted-on cover and seal.

The switching current capacity is 22 A. It has a single pole change-over switch with volt-free contacts.


Cable entry is through a single 3/4" NPT thread entry. nVent RAYCHEM cable glands are available to suit non-armoured and armoured cable.


The 3 m long stainless steel fluid filled bulb and capillary give freedom to locate the enclosure remote from the bulb. The bulb exposure range is -50° C to $+215^{\circ}$ C.

The cast aluminium construction with stainless steel fittings gives a lightweight unit which can be pipe mounted using nVent RAYCHEM support brackets or surface mounted.

PRODUCT SPECIFICATIONS

Dimensions (in mm)

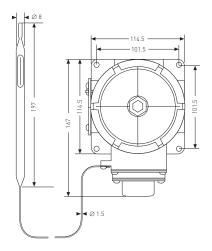



Enclosure


| Body and lid | Lacquer coated cast aluminium with stainless steel fittings and nitrile rubber internal lid seal |
|-------------------------------|--|
| Protection | IP 65 if installed with nVent RAYCHEM cable glands GL-33 or GL-34 |
| Lid fixing | Screw thread lid locked in place by a 2 mm hexagonal key grub screw |
| Entry | 1 x 3/4" NPT |
| Ambient operating temperature | -40°C to +60°C |

Temperature sensing

| remperature sensing | |
|----------------------|--|
| Туре | Fluid filled bulb and capillary |
| Dimensions | Capillary 3 m long, bulb 197 mm x 8 mm |
| Material | Stainless steel (Type SS316) |
| Exposure temperature | −50°C to +215°C |
| Minimum bend radius | Do not bend bulb, 15 mm for capillary |
| Switching | |
| Туре | Single pole change over volt free contacts (SPDT) |
| Rating | 22 A at 480 Vac, switching (100.000 cycles) |
| Setting | |
| Range | -4°C to +163°C |
| Repeatability | ±1.7 K |
| Differential | 5 K |
| Accuracy (switch on) | ±4.5°C at 21°C ambient and 50°C sensor temperature |
| Method | External knob and dial |
| Connection terminals | |
| Supply | 3 terminals for 1 to 4 mm ² conductors |

| Supply | 3 terminals for 1 to 4 mm ² conductors |
|----------------|---|
| Internal earth | Single bolt for 1 to 4 mm ² conductors |
| External earth | Single bolt and clamp for 1 to 4 mm ² conductors |

Connection details and thermostat control system

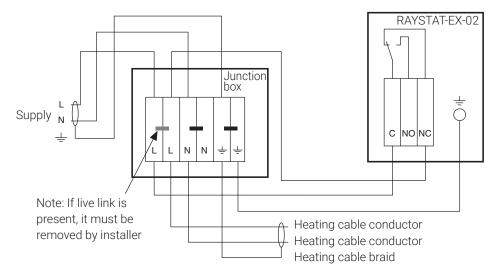

Maximum recommended heating cable lengths (230 V supply)

The maximum recommended heating cable length is restricted by the electrical protection sizing or the switching capacity of the RAYSTAT-EX-02.

For circuits and electrical protection rated up to and including 20 A

Use the maximum recommended heating cable lengths, mentioned in the cable datasheet.

For circuits and electrical protection rated above 20 A but less than or equal to 22 A

Use the shorter length of the values given in the cable datasheet and those given for your switching temperature in the table below.

For circuits and electrical protection rated above 22 A, RAYSTAT-EX-02 must NOT be connected for direct switching.



3BTV2-CT/-CR

_

Switching temp. (°C)

100 to 110

115 to 120

5BTV2-CT/-CR

_

8BTV2-CT/-CR

_

IOBTV2-CT/-CR

10QTVR2-CT

L max. (m) - Maximum recommended heating cable length

105 | 110













nVent RAYCHEM support bracket nVent RAYCHEM SB-100, SB-101, SB-111, SB-125 or surface mounting with 4 fixing holes (M6) on 101.5 x 101.5 mm centres

12XTV2-CT-T3

8XTV2-CT-T3

4XTV2-CT-T3

20QTVR2-CT

ISQTVR2-CT

20XTV2-CT-T2

5KTV2-CT

20KTV2-CT

15 VPL2

20VPL2

ISKTV2-CT

8KTV2-CT

ISXTV2-CT-T3

APPROVALS

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

T6

Product certification













More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

| Part description | RAYSTAT-EX-02 |
|------------------|----------------------|
| PN (Weight) | 404385-000 (1.77 kg) |
| Accessories | |

Power cable gland for non-armoured cable (to be ordered separately)

Power cable gland for armoured cable


GL-33 **GL-34** 493217-000 931945-000



CONNECT AND PROTECT

Surface and ambient sensing electronic thermostat (Ex)

PRODUCT OVERVIEW

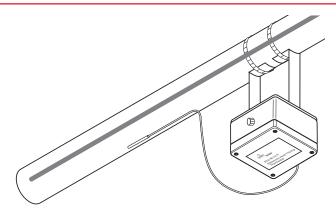

nVent RAYCHEM ETS-05 electronic surface and ambient sensing thermostat provides accurate temperature control for heating cables.

The ETS-05 is available in many versions. The ETS-05-L2-E is for temperatures up to 199°C, while the ETS-05-H2-E can be used for temperatures up to 499°C. The ETS-05-A2-E is an ambient sensing thermostat with a temperature setpoint in the range of 0°C to +49°C.


The maximum nominal load is 32 A for the thermostats. Temperature setting is accurate via digital rotary switches inside the enclosure.

The ETS-05 is available with an alarm relay for remote monitoring.


The ETS-05 has a LED indicator which indicates the status of the thermostat (powered on/off), the status of the heat-tracing cable (powered on/off) and the status of the sensor. In case of sensor failure, the thermostat can switch to an on or off state, depending upon the user's requirement.

Dimensions (in mm)

Top view

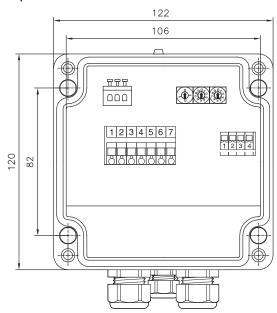

Side view

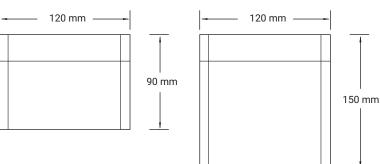

ETS-05 versions without alarming, without extended voltage range

ETS-05 versions with extended voltage range and/or alarm relay





Control & Monitoring



| The following table shows the general information applicable for all versions of the ETS-05. | | | | |
|--|--|--|--|--|
| Maximum sensor lead resistance | 20 Ohm | | | |
| Ingress protection | IP66 | | | |
| Switching accuracy | ±1 K at 5°C, 2 K at 499°C | | | |
| Switching differential (Hysteresis) | ≈ 3°C | | | |
| Output relay | Single pole change over type (SPST) | | | |
| Switching capacity | 32 A resistive load | | | |
| Ambient temperature range | -40°C to +60°C (ATEX / IECEX) -60°C to +60°C (EAC Ex) | | | |
| Internal power consumption | 3 VA | | | |
| Terminal size | max. 6 mm ² | | | |
| Cable gland entries | 2 x M25: 1 x M25 gland for power cable in 1 x M25 rain plug for heating cable out 1 x M20 gland for alarm wire (when alarm relay is available in unit) | | | |
| Sensor | The ETS-05 for ATEX/IECEx countries includes a sensor. The ETS-05 for EAC countries does not include a sensor. The sensor needs to be ordered separately. | | | |
| Alarm light | Green: ETS-05 powered on, heat-tracing cable off Yellow: ETS-05 powered on, heat-tracing cable on Red flashing: Sensor failure, controller in fail-safe mode | | | |

Fail safe "On" and Fail Safe "Off" configurable

ETS-05 with Alarm Relay 2.38 kg

Other versions: 1.64 kg

Versions

Fail safe

Weight

The ETS-05 is available in different versions. These are:

ETS-05-AB-CD-E

Letters ABCDE described in table below

| Type description ETS-05 | | | | | |
|---|--------------------|---------------------------------|--|--|--|
| "A": | Setpoint range | Temperature measurement range | | | |
| A: Ambient Sensing | 0°C to +49°C | -65°C to +260°C | | | |
| L: Line Sensing, Low Temp. | 0°C to +199°C | -65°C to +260°C | | | |
| H: Line Sensing, High Temp. | 0°C to +499°C | −65°C to +585°C | | | |
| 'B" | Voltage range | Voltage range | | | |
| 1: 110 Vac | 99-121 Vac | 99-121 Vac | | | |
| 1R: 110 Vac | 99-132 Vac | | | | |
| 2: 230 Vac | 195-230 Vac +10% | | | | |
| 2R: 277 Vac | 195-277 Vac +3% | | | | |
| "C" | | | | | |
| E: ATEX / IECEx approved (IEC countries) | | | | | |
| J: ATEX / IECEx approved (for Japan) | | | | | |
| "D" | | | | | |
| P: Earth Plate | | | | | |
| "E" | | | | | |
| A: Alarm Relay | NO and NC contacts | 275 Vac, 3 A resistive load max | | | |
| (EAC) in the product name indicates that the product has a Russian language label on it for Eurasian Customs Union countries. | | | | | |
| Examples: | | | | | |
| ETS-05-L2-EP: ETS-05 thermostat, setpoint range 0-199°C, 195-230 Vac, ATEX/IECEx approved, Earth Plate | | | | | |

ETS-05-H2R-EP-A: ETS-05 thermostat, setpoint range 0-499°C, 195-277 Vac, ATEX/IECEx, Earth Plate, Alarm Relay


Terminals

Power terminals

| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
|-------------|----------------|-------------------|--------------|-------|-------|-------|
| Line Out | Neutral Out | Neutral Supply | 230 V Supply | Earth | Earth | Earth |

Terminals 2 and 3 are joined electrically Terminals 5, 6 and 7 are joined electrically


Sensor/Failure mode select terminals



Terminals 1 to 3 allow for the connection of a three wire PT100 sensor.


Terminals 3 to 4 allow the user to select the default heating status on sensor error. Without a link fitted the heating will turn OFF if a sensor error is detected (default). With a link fitted the heating will turn ON if a sensor error is detected

Alarm relay



Healthy situation: 1-3 is closed, 2-3 is open Alarm situation: 1-3 is open, 2-3 is closed

Typical wiring diagram for direct switching

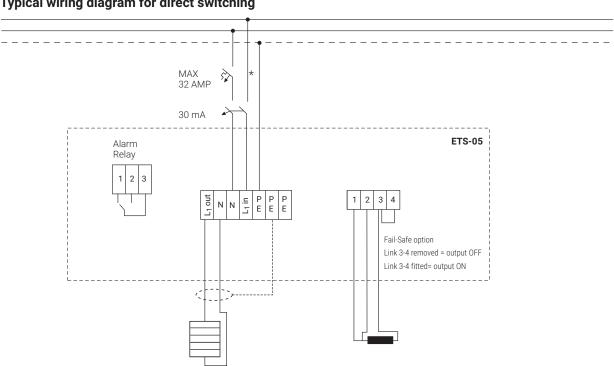

^{*} Circuit breaker configuration may vary according to local standards / requirements

Mounting method

Support bracket SB-100, SB-101, SB-110, SB-111, SB-130 or surface mounting with 4 fixing holes on 106 x 82 mm centers



For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

T5

Product certification









More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING DETAILS

| Product Name | Part Number |
|-----------------|-------------|
| ETS-05-L2-E | 1244-014367 |
| ETS-05-H2-E | 1244-014368 |
| ETS-05-A2-E | 1244-022311 |
| ETS-05-L2-EP | 1244-017508 |
| ETS-05-H2-EP | 1244-017509 |
| ETS-05-A2-E-A | 1244-022663 |
| ETS-05-L2-EP-A | 1244-022669 |
| ETS-05-H2-EP-A | 1244-022670 |
| ETS-05-H2R-EP-A | 1244-022680 |

| Product Name | Part Number |
|-----------------------|-------------|
| ETS-05-L2-E (EAC) | 1244-022701 |
| ETS-05-H2-E (EAC) | 1244-022702 |
| ETS-05-A2-E (EAC) | 1244-022700 |
| ETS-05-L2-EP (EAC) | 1244-022703 |
| ETS-05-H2-EP (EAC) | 1244-022704 |
| ETS-05-A2-E-A (EAC) | 1244-022710 |
| ETS-05-L2-EP-A (EAC) | 1244-022713 |
| ETS-05-H2-EP-A (EAC) | 1244-022714 |
| ETS-05-H2R-EP-A (EAC) | 1244-022719 |

(EAC) in the product name indicates that the product has a Russian language label on it for Eurasian Customs Union countries.

Control & Monitoring


AT-TS-13 and AT-TS-14



CONNECT AND PROTECT

Surface sensing thermostat, electronic

PRODUCT OVERVIEW

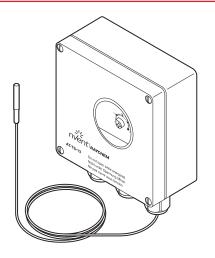



nVent RAYCHEM AT-TS thermostats provide temperature control in safe area. The temperature set point can be checked through a window in the lid. LED's are providing an indication when cables are energized (Heating ON) or when the temperature sensor is defect (sensor break or sensor short-circuit).

The temperature sensor has a length of 3 meter and can be shortened for ambient sensing operating. Direct connection of the heating cable is possible. Connection kits need to be ordered separately. The thermostat is available in 2 temperature ranges.

PRODUCT SPECIFICATIONS

Dimensions (in mm)

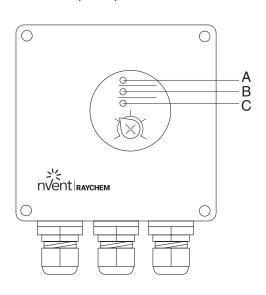



- Green LED Heating cable on
- Red LED Sensor break
- Red LED Sensor short-circuit



Technical details

| | nVent RAYCHEM AT-TS-13 | nVent RAYCHEM AT-TS-14 |
|------------------------------|----------------------------------|---------------------------------|
| Supply voltage | 230 Vac +10% -15% 50/60 Hz | 230 Vac +10% -15% 50/60 Hz |
| Max. switching current | 16 A, 250 Vac | 16 A, 250 Vac |
| Max. conductor size | 2.5 mm ² | 2.5 mm ² |
| Switching differential | 0.6 K to 1 K | 0.6 K to 1 K |
| Switching accuracy | ± 1 K at 5°C (calibration point) | 2 K at 60°C (calibration point) |
| Switch type | SPST (normally open) | SPST (normally open) |
| Adjustable temperature range | -5°C to +15°C | 0°C to +120°C |

Housing

| Temperature setting | inside | inside |
|----------------------|---|--|
| Exposure temperature | -20°C to +50°C | -20°C to +50°C |
| Ingress protection | IP65 according to EN 60529 | IP65 according to EN 60529 |
| Entries | 1 x M20 for supply cable (Ø 8-13 mm) 1 x M25 for heating element (Ø11-17 mm) 1 x M16 for the sensor | 1 x M20 for supply cable (Ø 8-13 mm) 1 x M25 for heating element (Ø 11-17 mm) 1 x M16 for the sensor |
| Material | ABS | ABS |
| Lid fixing | nickel-plated quick release screws | nickel-plated quick release screws |
| Mounting | SB-110 and SB-111 or surface mount | SB-110 and SB-111 or surface mount |

Temperature sensor

| | AT-TS-13 | AT-TS-14 |
|--|----------------|----------------|
| Туре | PTC KTY 83-110 | PTC KTY 83-110 |
| Length sensor cable | 3 m | 3 m |
| Diameter sensor cable | 5.5 mm | 5.5 mm |
| Diameter sensor head | 6.5 mm | 6.5 mm |
| Sensor material | PVC | Silicone |
| Max. exposure temperature sensor cable | 80°C | 160°C |


The sensor cable may be extended to a maximum of 100 m using a 2-conductor wire with a cross-section of 1.5 mm². The sensor cable should be shielded if it is laid in cable ducts or in the vicinity of high-voltage carrying cables. The shield of the extension cable should be grounded at the controller end only.

Output parameters


| | Red LED: Sensor break | Green LED: Heating Cable ON Red LED: Sensor break Red Led: Sensor short-circuit |
|--|-----------------------|---|
|--|-----------------------|---|

Wiring diagram for thermostat

AT-TS-13 or AT-TS-14

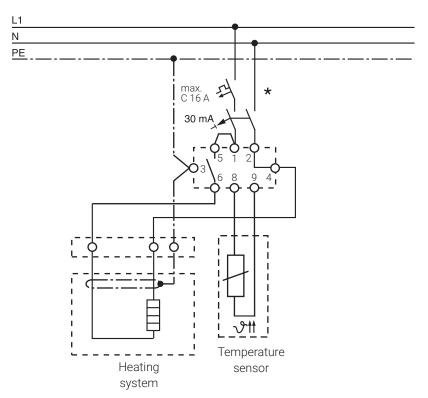

AT-TS-13/14 with contactor

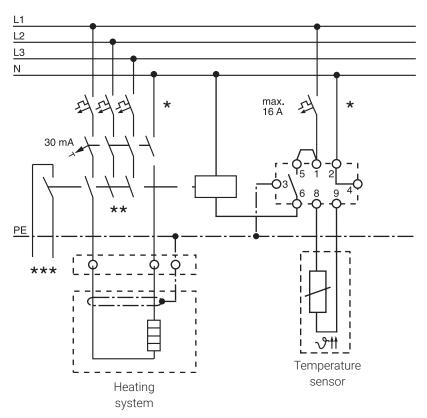

- Two- or four-pole electrical protection by circuit-breaker may be needed for local circumstances, standards and regulations
- ** Depending on the application, one- or three-pole circuit-breakers or contactors may be used
- *** Optional: Potential-free circuit-breaker for connection to the BMS









Product certification



ORDERING INFORMATION

| Part description | AT-TS-13 | AT-TS-14 |
|------------------|----------------------|----------------------|
| PN (Weight) | 728129-000 (0.44 kg) | 648945-000 (0.44 kg) |

Accessories

| PA Reducer | Reducer M25 (M)/M20 (F) | Reducer M25 (M)/M20 (F) |
|--------------------------|-----------------------------------|-------------------------|
| PN | 184856-000 | 184856-000 |
| Spare temperature sensor | HARD-69 | HARD-69 |
| (AT-TS-13 and AT-TS-14) | (Max. exposure temperature 160°C) | |
| PN (Weight) | 133571-000 (180 g) | 133571-000 (180 g) |







CONNECT AND PROTECT

Electronic controller for pipe freeze protection and temperature maintenance systems

PRODUCT OVERVIEW



The nVent RAYCHEM RAYSTAT V5 controller is designed for operation with the nVent RAYCHEM self-regulating heating cables.

Features

- · Easy set-up and programming of the unit
- · Flexible temperature control of pipe freeze protection and temperature maintenance systems
- · Line sensing and/or ambient sensing
- Proportional Ambient Sensing Control (PASC) algorithm for enhanced energy savings in ambient sensing mode
- · Alarm relay with change over contact to signal power, temperature or communication problems
- Pipe temperature monitoring with high and low temperature alarm
- Offsite configurable can be set up prior to final installation
- · On wall mountable for outdoor location

GENERAL

| Area of use | Non-hazardous locations; for nVent RAYCHEM heating cables | |
|---------------------------------|---|--|
| ELECTRICAL PROPERTIES | | |
| Supply voltage | 180 - 253 VAC 50/60 Hz | |
| Operating temperature | -40°C to +40°C ambient | |
| Power consumption | Max. 3.5 VA | |
| Switching capacity output relay | 25 A 230 VAC | |
| Size power supply terminals | 3 x 6 mm² max. | |
| Size heating cable terminals | 3 x 6 mm² max. | |
| Size alarm terminals | 3 x 1.5 mm² max. | |
| Size pipe sensor terminals | 2 x 1.5 mm² max. | |
| Alarm relay | Single pole double throw relay, volt-free; Max. switching capacity (resistive load only) 1 A/30 VDC 0.5 A/125 VAC, Max.: 60 VDC/125 VAC | |
| Keylock | Password protection for parameter settings | |
| USB port | For pre-setup in power off mode; for firmware upgrades | |








Control & Monitoring





| Dimensions | 210 mm x 110 mm x 85 mm |
|--------------------------|---|
| Ingress protection class | IP65 |
| Enclosure material | Polycarbonate |
| Mounting option | On wall; mountable DIN rail 35 mm (included in the package) |
| Cable entries | 2 x M25 and 1 x M20; 2 x M20 pre-punched |
| Storage temperature | -40°C to +50°C |
| Flammability class | DIN EN 60730/VDE 0631-1 |
| Weight | 990 g |

MODULE LAYOUT



1. LED Display

2. LED Green: a - Power to the unit

b - Power to the heating cable c - Line sensor connected or d - Ambient sensor connected

e - Alarm/Error info

3. M25 Gland: Power cable4. M25 Gland: Heating cable

5. M20 Gland: Sensor/Sensor pipe/External alarm

PROGRAMMING


| Selectable set temperatures | 0°C to +90°C (line sensing) and 0°C to +30°C (ambient sensing); optional 0°C to +250°C (line sensing, when used with SM-PT100-1) |
|-----------------------------|--|
| Parameter | Operation modes, high and low temperature alarm, hysteresis |

ENERGY SAVING WITH PROPORTIONAL AMBIENT SENSING CONTROL (PASC)

Duty cycle (power to heater on) depends on the ambient temperature. For example: If minimum temperature= -20° C and if maintain temperature (set point)= $+5^{\circ}$ C

| ambient t° | % ON | |
|------------|------|--------------|
| -20 | 100 | |
| -10 | 60 | Min. Ambient |
| 0 | 20 | |
| 5 | 0 | Set point |

Result: At ambient temperature of -5°C, 60% energy is saved



SENSOR

| | Standard | With SM-PT100-1 Module | |
|-------------------------|---|--------------------------------------|----------------------|
| | (included in box) | HARD-78 | MONI-PT100-260/2 |
| Temperature sensor type | NTC 2 KOhm / 25°C, 2-wire | PT100 | PT100 |
| Sensor tip dimensions | Ø 5 mm; length 20 mm | Ø 6 mm, length 50 mm | Ø 6 mm, length 50 mm |
| Sensor cable length | 5 m | 3 m | 2 m |
| Cable extension | Up to 150 m, cross section extension cable: 2 x 1,5 mm² | Up to 150 m, 3 x 1,5 mm ² | |
| Temperature range | -40°C to +90°C | -40°C to +150°C | -50°C to +260°C |

MONITORING

| Temperature alarm | High temperature alarm | Adjustable range: maintain temperature to +2°C to +250°C, OFF |
|--------------------------|---|---|
| | Low temperature alarm | Adjustable range: maintain temperature to −40°C to +245°C, OFF |
| Sensor alarm | Sensor open circuit Sensor short circuit | |
| Heating cable connection | Heating cable open circuit | |


APPROVALS

Approvals CE, ROHS, WEEE


Electromagnetic Compatibility (EMC) EN 61000-6-1: 2007; EN 61000-6-3:2007 + A1:2011

ELECTRICAL SCHEME

Standard: NTC Sensor

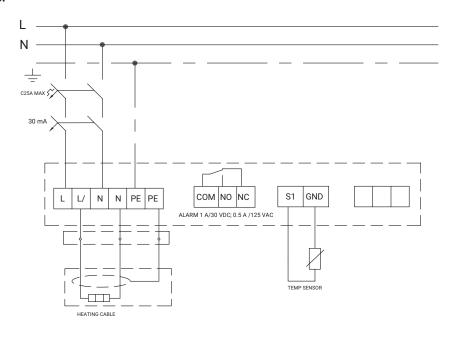

Option: PT100 Sensor

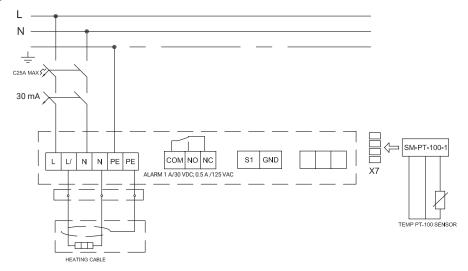

ORDERING DETAILS

| Catalog number | RAYSTAT V5 |
|----------------|---------------------------------------|
| Part number | 1244-022440 |
| Weight | 990 g |
| In package | Control unit, Din-rail, 1 Line sensor |











ACCESSORY

| Product description | PCN number |
|--|-------------|
| SENSOR-NTC-10M (-40°C +90°C) | 1244-015847 |
| Sensor Module for PT 100 (up to +250°C) SM-PT100-1 | 1244-022441 |
| PT-100 Sensor HARD-78 (-40°C +150°C) | 213430-000 |
| PT-100-Sensor MONI-PT100-260/2 (-50°C +260°C) | 1244-006615 |
| GM-TA-AS NTC-Sensor / Ambient sensor in enclosure | 1244-017965 |
| nVent RAYCHEM PB-POWERBANK | 1244-020365 |

Important: The nVent RAYCHEM RAYSTAT controller is for use with the nVent RAYCHEM heating cables only. The warranty and system listing will be invalidated if the RAYSTAT controller is used with other heating cables.






T-M-10-S/+x+y



CONNECT AND PROTECT

Surface sensing thermostat

PRODUCT OVERVIEW

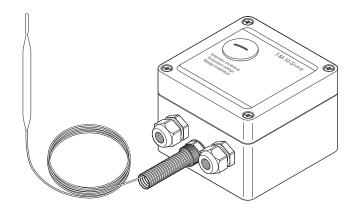

A surface sensing thermostat providing temperature control in safe areas.


Temperature set point adjustment can be completed, without opening the enclosure, via a removable plug in the lid. The 2 meter long stainless steel capillary is protected at the enclosure by a flexible conduit.

Direct connection of the heating cable is possible.

The thermostat is available in 3 temperature ranges: 0-50°C; 0-200°C; 50-300°C.

PRODUCT SPECIFICATIONS

Dimensions (in mm)

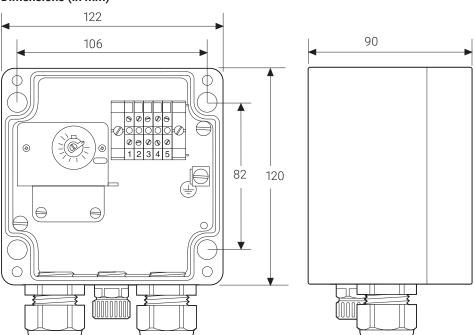














Connection details

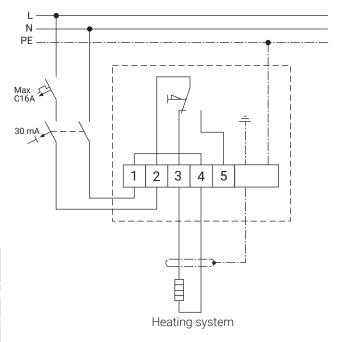

Technical details

| | T-M-10-S/+0+50C | T-M-10-S/0+200C | T-M-10-S/+50+300C |
|-------------------------------|--|---|---|
| Max rated voltage (nom) | 230 Vac | 230 Vac | 230 Vac |
| Temperature setting | 0°C to +50°C | 0°C to +200°C | +50°C to +300°C |
| Switching type | Single pole change over (SPDT) 100,000 cycles at 16 A | Single pole change over (SPDT) 100,000 cycles at 16 A | Single pole change over (SPDT) 100,000 cycles at 16 A |
| Switching capacity | Max 16 A | Max 16 A | Max 16 A |
| Hysteresis/Differential | 2.5% of temperature range | 2.5% of temperature range | 2.5% of temperature range |
| Accuracy | ±1.5% of setpoint for temperature setting in upper third of range (measured at 22°C) | | (measured at 22°C) |
| Setting | Internal dial, through lid | Internal dial, through lid | Internal dial, through lid |
| Terminal size | 4 mm ² | 4 mm ² | 4 mm ² |
| Ambient operating temp. range | -20°C to +80°C | -20°C to +80°C | -20°C to +80°C |

Output parameters

| Control relay | Change-over switch | Change-over switch | Change-over switch |
|---------------|--------------------|--------------------|--------------------|

Enclosure

| Protection | IP65 | IP65 | IP65 |
|------------------------|--|-------------------|-------------------|
| Dimension | 122 x 120 x 90 mm | 122 x 120 x 90 mm | 122 x 120 x 90 mm |
| Materials body and lid | Grey, polyester enclosure | | |
| Lid fixing | 4 captive screws, stainless steel | | |
| Entries | 2 entries: 1 x M25 reducer M25 (M)/M20 (F) incl. M20 gland (Ø 8-13 mm) 1 x M20 gland (Ø 8-13 mm) | | |

Temperature sensor

| Туре | | Fluid filled capillary, 2 m long | | |
|----------------|------------------------|--|-----------------|-----------------|
| Dimensions | Ø | 8 mm | 8 mm | 8 mm |
| | Length sensing element | 166 mm | 78 mm | 56 mm |
| Material | | V4A Stainless Steel | | |
| Exposure tempo | erature | -40°C to +60°C | -20°C to +230°C | -20°C to +345°C |
| Minimum bend | ng radius | 10 mm for capillary, the sensor cannot be bent | | |

Mounting method

| Support bracket | SB-110 or SB-111 or | SB-110 or SB-111 or | SB-110 or SB-111 or surface |
|-----------------|---------------------|---------------------|-----------------------------|
| | surface mount | surface mount | mount |

Product certification



More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

| Ordering references | Part Number (PN) | Weight |
|---------------------|------------------|--------|
| T-M-10-S/0+50C | 105336-000 | 1 kg |
| T-M-10-S/0+200C | 337388-000 | 1 kg |
| T-M-10-S/+50+300C | 607672-000 | 1 kg |

Meaning of reference: T-M-10-S/+x+y

T = thermostat

M = mechanical thermostat

10 = control thermostat

S = surface sensing

x = min temperature of control range

y = max temperature of control range





Control & Monitoring










CONNECT AND PROTECT

Surface sensing thermostat with limiter

PRODUCT OVERVIEW

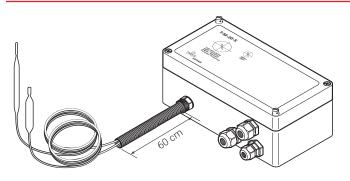

A surface sensing thermostat providing temperature control and temperature limiter in safe areas. The high limit cut-out prevents the heating system exceeding a preset maximum temperature should the control function fail to operate or an unsafe process temperature occur.


Temperature set point adjustment and limiter reset can be completed, without opening the enclosure, via removable plugs in the lid.

Both 2 meter long stainless steel fluid filled bulb and capillary are protected at the enclosure by a flexible conduit.


Direct connection of the heating cable is possible. The thermostat is available in 3 temperature ranges. 0-100°C; 0-200°C; 50-300°C.

PRODUCT SPECIFICATIONS

Dimensions (in mm)

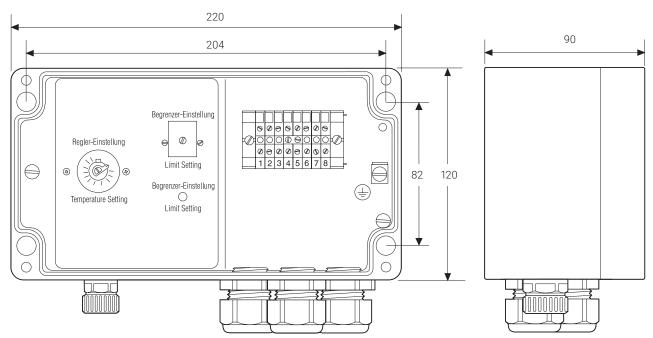

Connection details

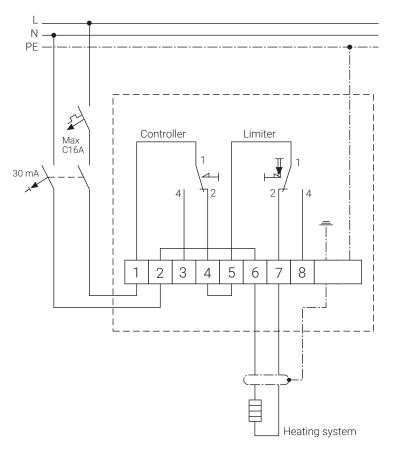

Technical details

| | | T-M-20-S/0+100C | T-M-20-S/0+200C | T-M-20-S/+50+300C |
|-------------------------------|------------|---|---------------------------------|----------------------------|
| Max rated voltage (nom) | | 230 Vac | 230 Vac | 230 Vac |
| - | Controller | 0°C to +100°C | 0°C to +200°C | +50°C to +300°C |
| Temperature setting | Limiter | +50°C to +150°C | +80°C to +200°C | +150°C to +350°C |
| Switching type | | Single pole change over (SPDT) 100,000 cycles at 16 A (controller) 500 cycles at 10 A (limiter) | | |
| Cwitching consoity | Controller | Max 16 A at 230 Vac | Max 16 A at 230 Vac | Max 16 A at 230 Vac |
| Switching capacity | Limiter | Max 16 A at 230 Vac | Max 16 A at 230 Vac | Max 16 A at 230 Vac |
| Hysteresis/Differential | | 2.5% of temperature range | 2.5% of temperature range | 2.5% of temperature range |
| Accuracy | | ±1.5% of setpoint in upper third of | of temperature range (at 22°C a | mbient) |
| Setting Internal dia | | Internal dial, through lid | Internal dial, through lid | Internal dial, through lid |
| Terminal size | | 4 mm ² | 4 mm ² | 4 mm ² |
| Ambient operating temp. range | | -20°C to +80°C | -20°C to +80°C | -20°C to +80°C |

Output parameters

| Control relay | Change-over switch (SPDT) |
|---------------|---|
| Limiter relay | Change-over switch with possibility for external alarm (SPDT) |

Enclosure

| Protection | IP65 | IP65 | IP65 |
|------------------------|---|---------------------------|------------------------------|
| Dimension | 222 x 120 x 90 mm | 222 x 120 x 90 mm | 222 x 120 x 90 mm |
| Materials body and lid | Grey, polyester enclosure | Grey, polyester enclosure | Grey, polyester enclosure |
| Lid fixing | 4 captive screws, stainless steel | | |
| Entries | 3 entries: 1 x M25 Reducer M25 (M)/M20 (F) incl. M20 gland (Ø 8–13 mm) 1 x M20 gland (Ø 8–13 mm) 1 x M20 gland (Ø 8–13 mm) | | |

Type

Dimensions

Controller

Limiter

Material

Exposure temperature













For use in ordinary area.





Length sensing element

Length sensing element

Controller

Limiter

Minimum bending radius

Mounting method Support bracket

Storage temperature

APPROVALS

ORDERING INFORMATION

| Ordering References | Part Number (PN) | Weight |
|---------------------|------------------|--------|
| T-M-20-S/0+100C | 1244-022642 | 1.9 kg |
| T-M-20-S/0+200C | 1244-022643 | 1.9 kg |
| T-M-20-S/+50+300C | 1244-022644 | 1.9 kg |

10 mm for capillary, the sensor cannot be bent

T-M-20-S/0+100C

V4A Stainless Steel

SB-120 or surface mount

-50°C to +50°C

8 mm

90 mm 6 mm

52 mm

+125°C

+175°C

Fluid filled capillary, 2 meter long

T-M-20-S/0+200C

V4A Stainless Steel

8 mm

82 mm

6 mm

57 mm

+230°C

+230°C

T-M-20-S/+50+300C

V4A Stainless Steel

8 mm

60 mm

6 mm

85 mm

+330°C

+365°C

Meaning of reference: nVent RAYCHEM T-M-20-S/+x+y

T = thermostat

M = mechanical thermostat

20 = control thermostat + limiter

S = surface sensing

x = min temperature of control range


y = max temperature of control range



CONNECT AND PROTECT

Surface sensing thermostat with safety limiter for hazardous area 🖾

PRODUCT OVERVIEW

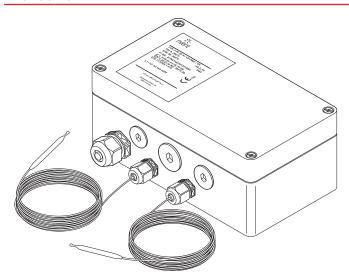

A surface sensing thermostat providing temperature control and temperature limit in hazardous areas.

The safety limiter prevents the heating system exceeding a preset maximum temperature should the control function fail to operate or an unsafe process temperature occur. The maximum rated voltage is 400 VAC. The switching current capacity is 16 A maximum via independent Ex d single pole change over micro switches with volt-free contacts.


The switches are mounted within an Ex e enclosure together with a spring-type terminal block for fast easy connection. The sensors are 3 meter long stainless steel fluid filled bulb and capillary.

The thermostat is delivered with Ex approved power cable glands and plugs and the entries offer the possibility for a variety of connections such as connecting M25 and M20 glands for direct heating cable entry or alarm output.

The thermostat with limiter is available in 3 temperature ranges: +0°C +120°C, +0°C +200°C and +50°C +300°C

PRODUCT SPECIFICATIONS

Dimensions (in mm)

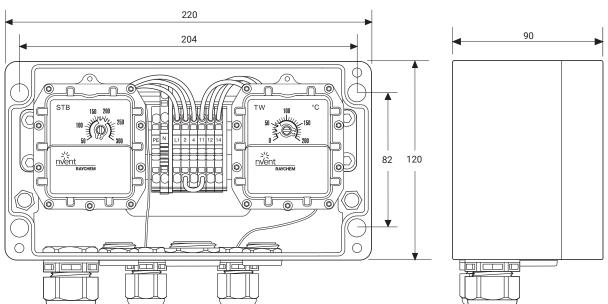










Control & Monitoring



Connection details

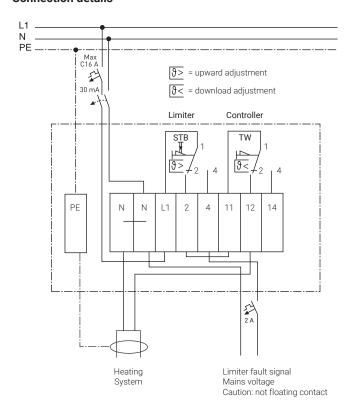

Technical details

| | | T-M-20-S/+0+120C/EX | T-M-20-S/+0+200C/EX | T-M-20-S/+50+300C/EX | |
|-------------------------------|------------|---|---|---|--|
| Temperature setting | Controller | +0°C to +120°C | +0°C to +200°C | +50°C to +300°C | |
| | Limiter | +0°C to +120°C | +50°C to +300°C | +50°C to +300°C | |
| Switching type | | Single pole change over (SPDT) >100.000 cycles at I nom | Single pole change over (SPDT) >100.000 cycles at I nom | Single pole change over (SPDT) >100.000 cycles at I nom | |
| Switching capacity | | Maximum 16 A at 400 Vac, resistive load | Maximum 16 A at 400 Vac, resistive load | Maximum 16 A at 400 Vac, resistive load | |
| Hysteresis/ Differential | Controller | max. 2.5% range, calibrated downwards | max. 2.5% range, calibrated downwards | max. 2.5% range, calibrated downwards | |
| | Limiter | max 7% calibrated upwards | max. 7.5%, calibrated upwards | max. 7.5%, calibrated upwards | |
| Setting | | Inside enclosure | Inside enclosure | Inside enclosure | |
| Reset limiter | | Inside enclosure by means of a screwdriver | | | |
| Terminal size | | 4 mm ² | 4 mm ² | 4 mm ² | |
| Terminal type | | spring-type terminals | spring-type terminals | spring-type terminals | |
| Ambient operating temp. range | | -60°C to +70°C | -40°C to +70°C | -40°C to +70°C | |

Output parameters

| Control relay | Change-over switch | Change-over switch | Change-over switch |
|---------------|--|--------------------|--------------------|
| Limiter relay | Change-over switch with possibility for external alarm | | |
| | Capillary leakage detection system | | |

Enclosure

| | T-M-20-S/+0+120C/EX | T-M-20-S/+0+200C/EX | T-M-20-S/+50+300C/EX |
|------------------------|--|---|---|
| Protection | IP65 | IP65 | IP65 |
| Dimension | 220 x 120 x 90 mm | 220 x 120 x 90 mm | 220 x 120 x 90 mm |
| Materials body and lid | Black, glass filled polyester enclosure | Black, glass filled polyester enclosure | Black, glass filled polyester enclosure |
| Lid fixing | 4 captive screws, stainless steel | 4 captive screws, stainless steel | 4 captive screws, stainless steel |
| Entries | 6 entries: 1 x M25 gland (Ø 8-17 mm): power supply 1 x M25 stopping plug: output to heating cables | | |
| | 2 x M20 stopping plug: output to heating cables (possibility to connect single conductor heating element) | | |
| | 2 x M20: capillary sensors | | |

Temperature sensor

| Туре | | Fluid filled capillary, 3 m long | Fluid filled capillary, 2 m long | Fluid filled capillary, 2 m long |
|----------------------|------------|--|--|---|
| Dimensions | Controller | Ø 6 mm; length sensing element = 90 mm | Ø 6 mm; length sensing element = 72 mm | Ø 4 mm; length sensing element = 135 mm |
| | Limiter | Ø 6 mm; length sensing element = 58 mm | Ø 4 mm; length sensing element = 78 mm | Ø 4 mm; length sensing element = 78 mm |
| Material | | | stainless steel | stainless steel |
| Temperature exposure | Controller | -40°C +138°C | -40°C +230°C | -40°C +345°C |
| | Limiter | -40°C +138°C | -40°C +345°C | -40°C +345°C |
| Minimum bendir | ng radius | 5 mm for capillary (not for sensor) | 5 mm for capillary (not for sensor) | 5 mm for capillary (not for sensor) |

Mounting method

| Support bracket | SB-120, SB-125 or surface | SB-120, SB-125 or surface mounting via 4 fixing holes at 204 x 82 centres | | |
|-----------------|---------------------------|---|------------|--|
| PN | | SB-120 | 165886-000 | |
| | | SB-125 | 1244-00603 | |

APPROVALS

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

T6 ...T4

Product certification











More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.





ORDERING INFORMATION

| Ordering References: | PN Number | Weight |
|----------------------|-------------|--------|
| T-M-20-S/+0+200C/EX | 1244-013410 | 2 kg |
| T-M-20-S/+50+300C/EX | 1244-013411 | 2 kg |
| T-M-20-S/+0+120C/EX | 1244-016536 | 2 kg |

Meaning of reference: nVent RAYCHEM T-M-20-S/+x+y/Ex

T = thermostat

M = mechanical thermostat

20 = control thermostat + limiter

S = surface sensing

x = min temperature of control range

y = max temperature of control range

Ex = hazardous area






Elexant 5010i and Elexant 5010i-LIM



CONNECT AND PROTECT

Field-Mounted electronic heat-tracing control unit (Ex)

PRODUCT OVERVIEW

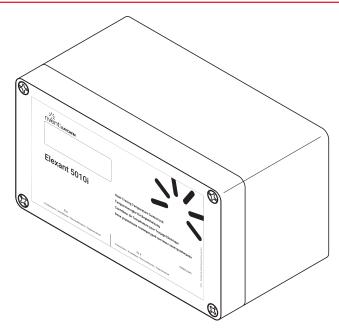

The nVent RAYCHEM Elexant 5010i is an electronic heat-tracing control unit featuring the benefits of local control and the capability for central monitoring. Elexant 5010i control unit can be used for single phase circuits up to 25 A and is approved for use in hazardous areas. The Elexant 5010i can provide tight temperature control and is available with an IEC 61508-SIL 2 classified safety temperature limiter on board (Elexant 5010i-LIM). It measures the temperature with up to two RTD (s) connected to the unit. The Safety temperature limiter has a dedicated temperature input.

Control, monitoring and alarm capabilities

The Elexant 5010i offers several different control algorithms including PASC for an optimised electrical heat-tracing control. The Elexant 5010i offers alarms for high and low temperature, high and low current, high and low voltage and ground fault. The trip and warning level of the ground-fault current is user configurable and can be used as a warning and to isolate circuits. The Elexant 5010i control unit provides a dry contact relay for alarm annunciation.

Automated heat-tracing system check

To ensure system integrity the Elexant 5010i control unit can be configured to periodically check dormant heating cables for faults. As a consequence maintenance personnel is systematically informed about the status of the heat-tracing system, and unexpected and usually expensive downtime of important pipelines can be reduced.

Communications and networking

The Elexant 5010i control unit is equipped with a RS-485 interface. Through this interface up to 247 Elexant 5010i units can be networked to a single nVent RAYCHEM NGC-UIT3-EX/TOUCH 1500 or to one serial port of a standard PC running nVent RAYCHEM Supervisor software.

The Elexant 5010i control unit can as well be monitored and/or configured via the wireless Tab-EX handheld device. This device is available for hazardous areas.

Installation

The Elexant 5010i control unit can be installed in the field near the heating application. The Elexant 5010i enclosures are manufactured from high impact-resistant, UV stabilized glass-filled polyester suitable for installation indoors or outdoors. One heating cable can be directly connected to the unit. The units can be mounted on the heated surface via an appropriate support bracket.

Configuration and commissioning


The Elexant 5010i control unit can be commissioned locally by means of a handheld programming device or from a central location using the nVent RAYCHEM NGC-UIT3-EX/TOUCH 1500 or nVent RAYCHEM Supervisor Software. After programming, all settings are permanently stored in the non-volatile memory of the Elexant 5010i control unit, avoiding loss of data in the event of power failure or after a long term power shutdown.

nVent.com/RAYCHEM | 181





Dimensions (in mm)

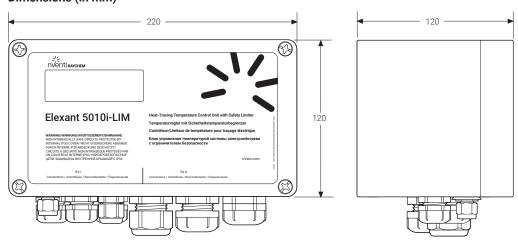

Sample shown is Elexant 5010i-LIM. Gland included in scope of delivery - 1 x M25 x 1,5


Enclosure

| | Elexant 5010i(-LIM) units can be installed directly on the pipe via an appropriate support bracket as long as the maximum permitted ambient temperature is not exceeded. Alternatively, units can be mounted on any stable structure via the moulded holes in the enclosure. | |
|-------------------------|--|--|
| Protection | IP66 per IEC-60529 | |
| Material | Glass fibre reinforced enclosure with internal metallic earth plate on the bottom | |
| Entries | 1 x M25 gland Ø 8 – 17 mm: power IN/heating cable out 3 x M25 | |
| Mounting & installation | Installation on an appropriate support bracket directly on the heated surface up to temperatures of 230°C. When the temperature of the heated surface is above 230°C, install the control unit to a stable structure nearby the application. | |
| Installation position | Any position allowed, typical use with glands facing down | |

Electrical data

| Power supply & own power consumptio | n 100 Vac to 250 Vac +/-10% 50/60 Hz 20 VA max. |
|-------------------------------------|---|
| Connection terminals | Spring-type |
| L, N and PE terminals | 9 pc (cables with cross section ranging from 0.2 to 6 mm²) |
| Alarm output terminals | 3 pc (cables with cross section ranging from 0.2 to 2.5 mm²) |
| Pt 100 (RTD) terminals | 8 pc Elexant 5010i, 12 pc Elexant 5010i-LIM (cables with cross section ranging from 0.2 to 1.5 mm²) |
| RS-485 communication | 7 pc (0.2 to 1.5 mm²) |
| Internal Earth stud for RTD shield | 1 pc (Cable cross section max 6 mm²) |
| Alarm output relay | Contact rated 250 Vac/3 A Relay output is software programmable to open, close or to toggle in case of alarm |
| Electrical safety | EN 61010-1. Category III. Pollution degree 2 |

Connection diagram (typical)

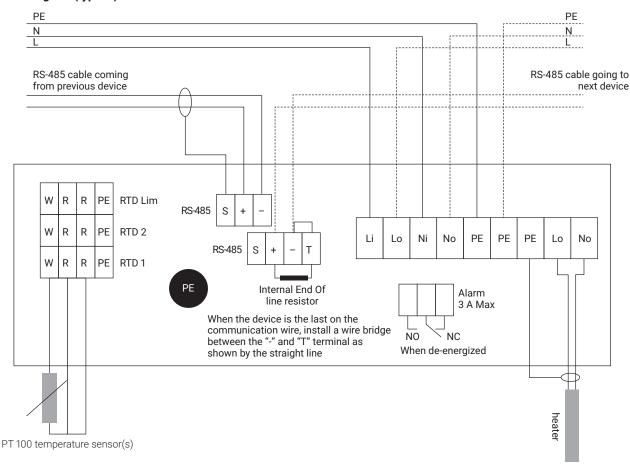

mnoroturo concoro

| Temperature sensors | |
|-----------------------------------|--|
| Compatible types | 100 Ω platinum, 3-wire, α = 0.00385 Ω /°C. Can be extended with a three core shielded or braided cable of maximum 20 Ω lead resistance per conductor. |
| Quantity | Two RTD inputs for the control unit plus one independent temperature input for the safety limiter. All temperature sensors are permanently monitored for "sensor short", "sensor break". |
| Communications | |
| Physical network | RS-485 and Bluetooth |
| Protocol/topology | Modbus RTU or ASCII. Multi drop/Daisy chain |
| Cable and maximum length | Shielded twisted pair cable, 0.5 mm² (AWG 24) or larger maximum cable length should be no more than 1200 m |
| Maximum quantity of control units | Max. of 247 units per nVent RAYCHEM NGC-UIT3-EX/TOUCH 1500 or per serial |

Network User Interface

| Environmental | |
|-------------------------------|-----------------------------------|
| Ambient operating temperature | From -50°C to +60°C (ATEX, IECEx) |
| Storage temperature | From -55°C to +80°C (ATEX, IECEx) |

TOUCH 1500, NGC-UIT3-EX, Supervisor and Elexant Connect

communication port in one network

Measuring ranges

| measuring runges | |
|--------------------------------|--|
| Temperature range control unit | From -200°C to +700°C in steps of 1K |
| Temperature range limiter | From +50°C to +599°C in steps of 1K (Elexant 5010i-LIM only) |
| Voltage | From 90 Vac to 305 Vac |
| Load Current | From 0.1 A to 25 A |
| Ground-fault current | From 10 mA to 500 mA (RCD/ELCB required due to IEC and/or local regulations) |
| Heater time alarm | From 1 to 1 x 10 ⁶ hours |
| Relay cycle alarm | From 0 to 2 x 10° cycle |



Programming and setting

| Method | Through handheld programming device and a wireless Bluetooth connection or via RS-485 interface and nVent RAYCHEM Supervisor software or nVent RAYCHEM User Interface |
|------------------|---|
| Units of measure | °C or °F, software selectable |
| Memory | Non-volatile, no loss of parameters after the event of power outage or long term shut down, data holding time $\sim\!10$ years |
| LED indicators | Status LEDS are available for: Heater, Alarm, RS-485 communication, Bluetooth communication Heater, Alarm, Limiter Tripped, RS-485 communication and Bluetooth |

APPROVALS

For use in ordinary and hazardous area Zone 1 or Zone 2 (Gas) or Zone 21 or Zone 22 (Dust)

Temperature classification

T4

Product certification











* all in progress

More details about product certification, approvals and conditions of safe use are www.nVent.com/RAYCHEM.

Functional safety approval for limiter:

SIL2 IEC 61508

ORDERING INFORMATION

Elexant 5010i control units

| Name | Description | Part Number | Weight |
|---------------------------------|----------------------|-------------|--------|
| Elexant 5010i | Controller | 2000002132 | 2.2 kg |
| Elexant 5010i-LIM | Controller + Limiter | 2000002133 | 2.3 kg |
| Elexant 5010i (EAC pending) | Controller | 2000002370 | 2.2 kg |
| Elexant 5010i-LIM (EAC pending) | Controller + Limiter | 2000002369 | 2.3 kg |

Temperature sensors

| Name | Description | Part Number |
|-----------------------|---|-------------|
| MONI-PT100-260/2 | Flexible sensor, maximum 260°C, 2 m length | 1244-006615 |
| MONI-PT100-260/5 | Flexible sensor, maximum 260°C, 5 m length | 1244-020817 |
| MONI-PT100-260/10 | Flexible sensor, maximum 260°C, 10 m length | 1244-020816 |
| MONI-PT100-EXE | Temperature Sensor with MI Cable and Junction Box | 967094-000 |
| MONI-PT100-EXE-SENSOR | Temperature Sensor with MI Cable | 529022-000 |
| MONI-PT100-EXE-AMB | Ambient Temperature Sensor with Junction box | 1244-004451 |

Support bracket for installation on pipe

Product name SB-125

1244-06603 (0.5 kg) Part number & (weight)

Bluetooth enabled handheld programming device with customized nVent RAYCHEM software

| Name | Description | Part Number |
|---------------|---|-------------|
| Tab-EX 02 DZ1 | nVent RAYCHEM configuration & monitoring assistant Zone 1 | 1244-022745 |
| Tab-EX 03 DZ2 | nVent RAYCHEM configuration & monitoring assistant Zone 2 | 1244-022743 |

Control & Monitoring

Elexant 4010i



CONNECT AND PROTECT

Single-point heat-tracing controller

PRODUCT OVERVIEW



Elexant 4010i-SSR-FW

The nVent RAYCHEM Elexant 4010i is a compact, full-featured, touch screen based, single-point heat-tracing controller. It provides control and monitoring of Electric Heat Tracing (EHT) circuits for both freeze protection and process temperature maintenance. This controller can monitor and alarm on high and low temperature, high and low current, ground-fault levels, voltage, and supports a host of additional features to offer the utmost in control and monitoring of EHT.

The Elexant 4010i controller is available in two output types: an electromechanical relay (EMR) for use in nonhazardous locations, and a solid-state relay (SSR) for use in nonhazardous and Class I Div. 2 / Zone 2 hazardous locations. The controller is protected by a Fiber reinforced plastic or Stainless steel enclosure, both with front window (-FW or -SW). Multiple communication ports allow flexible connectivity for remote monitoring, configuration, and ease of integration with nVent RAYCHEM Supervisor software or a Distributed Control System (DCS).



Control

The Elexant 4010i measures temperatures of up to three directly-connected temperature sensors. The controller also supports 4-20 mA inputs, allowing the use of external temperature sensor converters with thermocouples or other sensor types. The Elexant 4010i also features line sensing, ambient sensing, Proportional Ambient Sensing Control (PASC), and power limiting modes.

Monitoring

A complete set of parameters are measured, including ground fault, temperature, current and voltage to ensure system integrity. The controller can be set to periodically check the heating cable for faults, alerting maintenance personnel of a heat-tracing problem eliminating costly manual maintenance checks.

A programmable dry contact alarm relay is provided for local or remote alarm annunciation.

Installation

The Elexant 4010i comes ready to install, eliminating the need for custom panel design or field assembly. The IP6x rated FRP or stainless steel enclosures are approved for use in both indoor and outdoor locations. Wiring is as simple as connecting the incoming and outgoing power wiring (up to 277 Vac) and temperature sensors as needed for the application.

The Elexant 4010i provides an intuitive user interface that makes it easy to use and program. No additional programming devices are needed. Alarm conditions and programming settings are easy to read and interpret on the color touch screen. Settings are stored in non-volatile memory in the event of a power failure.

Communication

Elexant 4010i units come equipped with RS485 and Ethernet ports and can be readily connected to a distributed control system (DCS). The units support both the Modbus RTU and Modbus/TCP protocols. The controller may be networked to a host PC running Windows-based nVent RAYCHEM Supervisor software for central programming, status review, and alarm annunciation.



Control algorithms


Control Range

| Area of Use | Nonhazardous locations (EMR versions) | |
|-------------------------------|--|--|
| | Nonhazardous and Class I, Division 2/Zone 2 hazardou | s locations (SSR versions) |
| Approvals | Hazardous locations | Non-Hazardous locations |
| | Class I, Division 2, Group A,B,C,D T4 Type 4X Class I, Zone 2, AEx nA nC [ia Ga] IIC T4 Gc Ex ec nC [ia Ga] IIC T4 Gc IP64 (FW) IP66 (SW) DEMKO 18 ATEX 2091 X IECEX UL 18 .0098X II3 (1)G Ex ec nC [ia Ga] IIC T4 Gc IP64 (FW) IP66 (SW) | Enclosure Type 4X IP64 (FW) IP66 (SW) E498881 Proc. Cont. Eq. |
| | Associated Apparatus Un = 305VAC Un = 305VAC Un = 5.4V U | |
| Electromagnetic Compatibility | IEC 61326-1:2012 / EN 61326-1:2013 | |
| Supply voltage | 100 Vac to 277 Vac, +/−10%, 50-60 Hz | |
| nternal power consumption | < 24 W | |
| ENVIRONMENTAL | | |
| Protection | Type 4X, IP64 (FRP enclosure) | |
| | Type 4X, IP66 (stainless steel enclosure) | |
| Materials | Fiber-Reinforced Plastic (FRP) or stainless steel (SS304 | .) |
| Ambient operating temperature | -40°C to 60°C (-40°F to 140°F) | |
| Ambient storage temperature | −55°C to 85°C (−67°F to 185°F) | |
| Relative humidity | 0% to 90%, noncondensing | |
| Environment | PD2, CAT III | |
| Max altitude | 2,000 m (6,562 ft) | |
| CONTROL | | |
| Relay Type | Double-pole, mechanical (EMR versions) | |
| | Double-pole, solid-state (SSR versions) | |
| /oltage, maximum | 277 Vac nominal, 50/60 Hz | |
| Current, maximum | 32 A @ 40°C, de-rated to 24 A @ 50°C and further de-ra | ted to 16 A @ 60°C (EMR) |
| | | |


EMR: On/Off, PASC, always on, always off

 -200°C to 700°C (-328°F to 1292°F)


SSR: On/Off, proportional, PASC, always on, always off

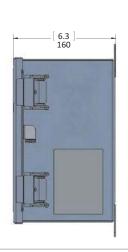


Elexant 4010i-EMR-FW

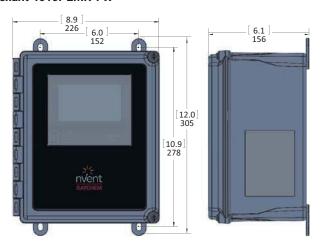


Elexant 4010i-SSR-SW

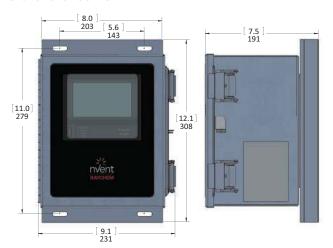

Elexant 4010i-SSR-FW

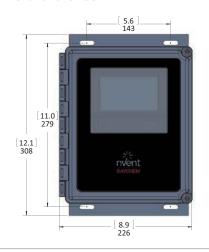



MOUNTING

| FRP enclosure with EMR (EMR-FW) | Surface mounting with four holes on 152 mm x 278 mm (6.0 in x 10.9 in) centers |
|---------------------------------|--|
| | Hole diameter: 8 mm (0.3 in) |
| FRP enclosure with SSR (SSR-FW) | Surface mounting with four holes on 143 mm x 279 mm (5.6 in x 11.0 in) centers |
| | Hole diameter: 8 mm (0.3 in) |
| SS enclosure with EMR (EMR-SW) | Surface mounting with four holes on 152 mm x 279 mm (6.0 in x 11.0 in) centers |
| | Hole diameter: 8 mm (0.3 in) |
| SS enclosure with SSR (SSR-SW) | Surface mounting with four holes on 143 mm x 279 mm (5.6 in x 11.0 in) centers |
| | Hole diameter: 8 mm (0.3 in) |

MONITORING

| MONTOKING | | |
|--------------|--------------------------|---|
| Temperature | Low alarm range | −200°C to 700°C (−328°F to 1292°F) or OFF |
| | High alarm range | -200°C to 700°C (-328°F to 1292°F) or OFF |
| Ground fault | Alarm range | 10 mA to 500 mA or OFF |
| | Trip range | 10 mA to 500 mA or OFF |
| Current | Low alarm range | 0.1 A to 100 A or OFF |
| | High alarm range | 0.1 A to 100 A or OFF |
| | Power limit range | 8 W to 30 kW |
| Voltage | Low alarm range | 80 Vac to 300 Vac or OFF |
| | High alarm range | 80 Vac to 300 Vac or OFF |
| Resistance | Low resistance range | 1% to 100% of deviation from nominal |
| | High resistance range | 1% to 250% of deviation from nominal |
| Autocycle | Diagnostic test interval | 1 to 750 hours |
| | | |













TEMPERATURE SENSOR INPUTS

| Quantity | 3 |
|--------------------------|---|
| | Each can be individually set to one of the types below. |
| Types | |
| 100Ω platinum RTD | 3-wire, α=0.00385 ohms/ohm/°C |
| | −200°C to 700°C (−328°F to 1292°F), ± 1°C |
| | Can be extended with a 3-conductor shielded cable of 20Ω maximum per conductor |
| 100Ω nickel iron RTD | 2-wire, α=0.00599 ohms/ohm/°C |
| | −73°C to 350°C (−99°F to 662°F), ± 1°C |
| | Can be extended with a 2-conductor shielded cable of 20Ω maximum per conductor |
| 100Ω nickel RTD | 2-wire, α=0.00618 ohms/ohm/°C |
| | −70°C to 250°C (−94°F to 482°F), ± 1°C |
| | Can be extended with a 2-conductor shielded cable of 20Ω maximum per conductor |
| Thermocouple | Requires external 4-20 mA converter |
| | 4-20 mA current loop, ±0.05 mA, 24 Vdc loop power |
| | |

The Elexant 4010i-IS variants are equipped with intrinsic safety barriers at the RTD inputs.

RTD Intrinsic Safety Associated Apparatus Entity Parameters

Po (Maximum Output Power): 0.449 W

DIGITAL INPUTS

Quantity

| | May be configured for Hand-Off-Auto (HOA) operation | |
|-------------|--|--|
| Rating | 100Ω max loop resistance or 5-24 Vdc @ 1 mA maximum | |
| OUTPUTS | | |
| Alarm Relay | Form-C dry contact: 00 Vac to 277 Vac, 3 A 50/60 Hz | |

24 Vdc, max load of 250 mA @ 40°C, de-rated to 165 mA @ 60°C

Two multi-purpose inputs for connection to external dry (voltage free) contact or DC voltage

CONFIGURATION

Auxiliary Output

| Method | Touch screen display |
|-------------------------|---|
| Units | °F or °C |
| Idle display | Sensor temperature, control temperature, heater current, voltage, power, alarm status |
| LEDs | Status, heater on, alarm conditions, receive / transmit data |
| Memory | Nonvolatile, restored after power loss, checksum data checking |
| Stored usage parameters | Minimum and maximum process temperature, maximum ground-fault current, minimum and maximum voltage, maximum heater current, power accumulator, contactor cycle count, total time in use, heater on time |
| Alarm conditions | Low / high temperature, low / high current, low / high voltage, low / high resistance, ground-fault alarm / trip, RTD failure, loss of programmed values, EMR or SSR failure, equipment protection trip, attached device alarm, contactor lifetime exceeded |
| Alarm Modes | Normal (solid on), flash (on & off), toggle (re-ring new alarms) |
| Control Algorithms | EMR: On/Off, PASC, always on, always off |
| | SSR: On/Off, proportional, PASC, always on, always off |
| Equipment Protection | Ground fault trip, low / high temperature limit, Soft-Start features, (heat trace output limiting, SSR overcurrent protection, circuit breaker nuisance trip prevention) |
| Load Shedding | Up to 8 zones, with temperature failsafe and communication timeout (requires nVent RAYCHEM Supervisor) |
| Profiles | Built-in default setting profiles for common heat trace applications Up to two additional user configurations can be saved and reloaded. Saved configurations can be saved to, and loaded from, a USB thumb drive |
| | |

| Network | Automatic ne | etwork configuration with DHCP, or static IP configuration | |
|----------------------------------|---|---|--|
| Firmware Updates | User updateable using a USB thumb drive | | |
| Multi-language Interface | English, Fren | English, French, German, Spanish, Russian | |
| Other | Password pr | rotection, text tags / identifiers for controller and temperature sensors | |
| CONNECTION TERMINALS | | | |
| Power supply input | Screw termir | nals, 0.2 – 16.8 mm² (24 – 5 AWG) | |
| Heating cable output | Screw termir | nals, 0.2 – 16.8 mm² (24 – 5 AWG) | |
| Torque range for screw terminals | 1.2 – 1.5 Nm | | |
| Ground (Earth) | Three box lug | gs, 2.0 – 33.6 mm² (14 – 2 AWG) | |
| Sensor / Other terminals | Cage clamp | terminals, 0.08 – 3.3 mm² (28 – 12 AWG) | |
| CABLE ENTRIES | | | |
| Fiberglass enclosure | 3 x M16 | for temperature sensors, 2 x stopping plugs and 1 x rain plug | |
| | 2 x M20 | For communication and/or alarm relay, all with stopping plugs | |
| | 2 x M25 | 1 x gland (GL-55-M25), Ø 8-15 mm for power cable in | |
| | | 1 x rain plug for heat-tracing cable out | |
| Stainless steel enclosure | 3 x M16 | for temperature sensors, 2 x stopping plugs and 1 x rain plug | |
| | 2 x M20 | For communication and/or alarm relay, all with stopping plugs | |
| | 2 x M25 | 2 x rain plugs for power cable in and heat-tracing cable out | |
| COMMUNICATIONS | | | |
| RS-485 | | | |
| Туре | 2-wire RS-48 | 35 | |
| Cable | One shielded | d twisted pair | |
| Length | 1,200 m (4,00 | 00 ft.) maximum | |
| Quantity | Up to 247 de | Up to 247 devices per port | |
| Data Rate | 9600, 19.2k, 38.4k, 57.6k baud | | |
| Parity | None, even, o | odd | |
| Stop bits | 0, 1, 2 | | |
| Tx delay | 0 - 5 second | ds | |
| Protocol | Modbus RTU | J | |
| Ethernet | | | |
| Туре | 10/100 Base- | -Т | |
| Length | 100 m (328 f | ft) max | |
| | | | |

10 or 100 MB/s

Modbus/TCP, DHCP

Shielded 8-pin RJ-45

Data rates

Connection terminals

Protocol



| ORDERING DETAILS | | | |
|---|-----------------------|---------------------------|--------------------|
| Description | Catalog number | Part number | Weight (kg/lbs) |
| Elexant 4010i controller in an 20 cm x 25 cm FRP enclosure with window. Controls a single circuit with a 2-pole electromechanical relay (32 A EMR). Includes intrinsically safe barriers on RTD inputs with power cable gland. | 10380-009 | 4010i-EMR-IS-FW (EMEA) | 4.6/10.2 |
| (Approved for nonhazardous locations only. RTDs may be placed in Zone | 0/Zone 1/Zone 2 loc | cations) | |
| Elexant 4010i controller in an 20 cm x 25 cm stainless steel enclosure with window. Controls a single circuit with a 2-pole electromechanical relay (32 A EMR). Includes intrinsically safe barriers on RTD inputs with power cable gland. | 10380-011 | 4010i-EMR-IS-SW (EMEA) | 6.6/14.6 |
| (Approved for nonhazardous locations only. RTDs may be placed in Zone | 0/Zone 1/Zone 2 loc | cations) | |
| Elexant 4010i controller in an 20 cm x 25 cm FRP enclosure with window. Controls a single circuit with a 2-pole solid-state relay (32 A SSR). Includes intrinsically safe barriers on RTD inputs with power cable gland. | 10380-010 | 4010i-SSR-IS-FW (EMEA) | 6.6/14.6 |
| (Approved for Zone 2 hazardous locations. RTDs may be placed in Zone 0 | /Zone 1/Zone 2 loca | ations) | |
| Elexant 4010i controller in an 20 cm x 25 cm stainless steel enclosure with window. Controls a single circuit with a 2-pole solid-state relay (32 A SSR). Includes intrinsically safe barriers on RTD inputs with power cable gland. | 10380-012 | 4010i-SSR-IS-SW (EMEA) | 8.6/19.0 |
| (Approved for Zone 2 hazardous locations. RTDs may be placed in Zone 0 | /Zone 1/Zone 2 loca | ations) | |
| RTD Sensors | | | |
| Temperature Sensor with 2 m flexible cable and M16 gland, Pt100 | MONI- PT100-260/2 | 1244-006615 | 0.14/0.3 |
| Temperature Sensor with 5 m flexible cable and M16 gland, Pt100 | MONI- PT100-260/5 | 1244-020817 | 0.35/0.8 |
| Temperature Sensor with 10 m flexible cable and M16 gland, Pt100 | MONI- PT100-260/10 | 1244-020816 | 0.7/1.5 |
| Temperature Sensor with 2 m MI Cable and Junction Box, Pt100, ATEX | MONI-PT100-EXE | 967094-000 | 0.5/1.1 |

MONI-PT100-

EXE-SENSOR

529022-000

Available for download at www.nVent.com

0.13/0.3

Temperature Sensor with 2 m MI Cable and M16 gland, Pt100, ATEX

nVent RAYCHEM Supervisor Software

Elexant 4020i

CONNECT AND PROTECT

RAYCHEM

Single-point heat-tracing control module

PRODUCT OVERVIEW



Elexant 4020i-Mod-3P-IS

The nVent RAYCHEM Elexant 4020i is a compact, full-featured, touch screen based, single-point heat-tracing controller. It provides control and monitoring of Electric Heat-Tracing (EHT) circuits for both freeze protection and process temperature maintenance. This controller can monitor and alarm on high and low temperature, high and low current, ground-fault levels, voltage, and supports a host of additional features to offer the utmost in control and monitoring of EHT.

The Elexant 4020i controller provides three output types: a line powered electromechanical relay (EMR) for driving contactors in nonhazardous locations; a DC output for driving solid-state relays (SSRs) in nonhazardous and Class I Div. 2 / Zone 2 hazardous locations; and a 0-10V analog output for driving variable output power modules. Multiple communication ports allow flexible connectivity for remote monitoring, configuration, and ease of integration with nVent RAYCHEM Supervisor software or a Distributed Control System (DCS).

Control

The Elexant 4020i measures temperatures for up to three directly-connected temperature sensors. The controller also supports 4-20 mA inputs, allowing the use of external temperature sensor converters with thermocouples or other sensor types. The Elexant 4020i also features line sensing, ambient sensing, Proportional Ambient Sensing Control (PASC), and power limiting modes.

The Safety Limiter option provides a redundant, functionally safe, high temperature cutout mechanism. Its IEC61508 SIL2 certification makes it suitable for safety-critical applications.

Monitoring

A complete set of parameters are measured, including ground fault, temperature, current, and voltage to ensure system integrity. The system can be set to periodically check the heating cable for faults, alerting maintenance personnel of a heat-tracing problem eliminating costly manual maintenance checks.

A programmable dry contact alarm relay is provided for local or remote alarm annunciation. The dedicated Safety Limiter contactor output provides hardware redundancy for the Safety Limiter option.

Installation

The Elexant 4020i modules can be mounted on symmetric 35 mm DIN-railes into an enclosure appropriate for the intended environment. nVent offers standard multi-circuit panels suitable for indoor or outdoor locations, and custom configurations are available to provide the most flexible solution. Installing is as simple as connecting the incoming and outgoing power wiring and temperature sensors as needed for the application.

The Elexant 4020i provides is an intuitive user interface that makes it easy to use and program. No additional programming devices are needed. Alarm conditions and programming settings are easy to read and interpret on the color touch screen. Settings are stored in non-volatile memory in the event of a power failure.

Communication

Elexant 4020i units come equipped with RS485 and Ethernet ports and can be readily connected to a distributed control system (DCS). The units support both the Modbus RTU and ModBus/TCP protocols, and an optional ProfiBus module is also available. The controller may be networked to a host PC running Windows-based nVent RAYCHEM Supervisor software for central programming, status review, and alarm annunciation.

PRODUCT SPECIFICATIONS

Typical enclosure dimensions

Elexant 4020i-Mod shown









Front View


Side View Bottom View

Rear View

Mounting ([inches] mm)


Without IS barrier


Panel mounting on 35 mm DIN rails

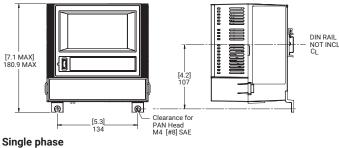


With IS barrier

Panel mounting on 35 mm DIN rails

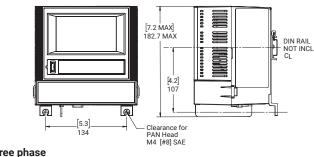





Technical details

| Supply voltage | 100 Vac to 277 Vac, +/-10%, 50-60 Hz | |
|--|--------------------------------------|------------|
| Internal power consumption | < 24 W per 4020i module | |
| I.S temperature sensor inputs (Optional) | Um = 305 VAC | |
| Associated apparatus | Uo = 5.4 V | Ca = 65 uF |
| Entity parameters | Io = 0.083 A | La = 2 mH |

Functional safety

| Standard | IEC 61508:2010 |
|--|--|
| Safety integrity level | SIL 2 |
| Systematic capability | SC 3 |
| Available only with the Safety Limiter option. | See Safety Limiter section of User Manual for detailed safety information. |

Environmental

| Ambient operating temperature | −40°C to 70°C (−40°F to 158°F) |
|-------------------------------|--------------------------------|
| Ambient storage temperature | −55°C to 85°C (−67°F to 185°F) |
| Relative humidity | 0% to 90%, noncondensing |
| Environment | PD2, CAT III |
| Max altitude | 2,000 m (6,562 ft) |

Elexant 4020i control modules are packaged in DIN rail mount housings for installation onto symmetric 35 mm DIN rails into enclosures suitable for the intended environment.

Control & load

| Load voltage, maximum | 690 Vac, 50/60 Hz | | |
|-----------------------|--|--|--|
| Load current, maximum | 63 A continuous (limited by the | 63 A continuous (limited by the rating of the output device) | |
| Control algorithms | | EMR Version: On/Off, PASC, always on, always off SSR Version: On/Off, proportional, PASC, always on, always off | |
| Control range | −200°C to 700°C (−328°F to 12 | −200°C to 700°C (−328°F to 1292°F) | |
| Monitoring | | | |
| Temperature | Low alarm range High alarm range | −200°C to 700°C (−328°F to 1292°F) or 0FF −200°C to 700°C (−328°F to 1292°F) or 0FF | |
| Ground fault | Alarm range Trip range | 10 mA to 500 mA or OFF 10 mA to 500 mA or OFF | |
| Current | Low alarm range High alarm range Power limit range | 0.1 A to 100 A or OFF 0.1 A to 100 A or OFF 8 W to 30 kW | |
| Voltage | Low alarm range High alarm range | 80 Vac to 300 Vac or OFF 80 Vac to 300 Vac or OFF | |
| Resistance | Low resistance range High resistance range | 1% to 100% of deviation from nominal 1% to 250% of deviation from nominal | |
| Autocycle | Diagnostic test interval | 1 to 750 hours | |
| | | | |

Temperature sensor inputs

Standard

| Quantity | 3 Each can be individually set to one of the types below. |
|-----------------------|--|
| Types | |
| 100 Ω platinum RTD | 3-wire, α =0.00385 ohms/ohm/°C -200°C to 700°C (-328°F to 1292°F), \pm 1°C Can be extended with a 3-conductor shielded cable of 20 Ω maximum per conductor |
| 100 Ω nickel iron RTD | 2-wire, α =0.00599 ohms/ohm/°C -73°C to 350°C (-99°F to 662°F), \pm 1°C Can be extended with a 2-conductor shielded cable of 20 Ω maximum per conductor |
| 100 Ω nickel RTD | 2-wire, α =0.00618 ohms/ohm/°C -70 °C to 250°C (-94 °F to 482°F), \pm 1°C Can be extended with a 2-conductor shielded cable of 20 Ω maximum per conductor |
| Thermocouple | Requires external 4-20 mA converter 4-20 mA current loop, ± 0.05 mA, 24 Vdc loop power |

The Elexant 4020i-IS variants are equipped with intrinsic safety barriers at the RTD inputs.













| 0 | pti | or | ıa |
|---|-----|----|----|
| | | | |

| Safety limiter | One dedicated temperature input |
|---------------------------|---|
| 100 Ω platinum RTD | 3-wire, α=0.00385 ohms/ohm/°C |
| | −200°C to 700°C (−328°F to 1292°F), ± 1°C |
| | Can be extended with a 3-conductor shielded cable of 20.0 maximum per conductor |

Digital inputs

| Quantity | Two multi-purpose inputs for connection to external dry (voltage free) contact or DC voltage May be configured for Hand-Off-Auto (HOA) operation |
|----------|--|
| Rating | 100 Ω max loop resistance or 5-24 Vdc @ 1 mA maximum |

Outputs

| Control relay | Form-A wet contact: | 100 Vac to 277 Vac, 3 A, 50/60 Hz |
|-------------------------------|---|-----------------------------------|
| DC (SSR) control output | 12 Vdc @ 215 mA max. | |
| Analog (linear phase control) | 0-10 Vdc @ 215 mA max. | |
| Alarm relay | Form-C dry contact: | 100 Vac to 277 Vac, 3 A, 50/60 Hz |
| Auxiliary output | 24 Vdc, max load of 250 mA @ 40°C, de-rated to 165 mA @ 60°C | |

Configuration

| Method | Touch screen display |
|-------------------------|--|
| Units | °F or °C |
| Idle display | Sensor temperature, control temperature, heater current, voltage, power, alarm status |
| LEDs | Status, heater on, alarm conditions, receive / transmit data |
| Memory | Nonvolatile, restored after power loss, checksum data checking |
| Stored usage parameters | Minimum and maximum process temperature, maximum ground-fault current, minimum and maximum voltage, maximum heater current, power accumulator, contactor cycle count, total time in use, heater on time |
| Alarm conditions | Low / high temperature, low / high current, low / high voltage, low / high resistance, ground-fault alarm / trip, RTD failure, loss of programmed values, EMR or SSR failure, againment protection trip, attached device alarm. Safety Limiter alarms, contactor |

| | ground-fault alarm / trip, RTD failure, loss of programmed values, EMR or SSR failure, equipment protection trip, attached device alarm, Safety Limiter alarms, contactor lifetime exceeded |
|-------------|---|
| Alarm modes | Normal (solid on) flash (on & off) toggle (re-ring new alarms) |

| O = | EMP Vancions On 10ff DAGO almost an almost aff |
|-------------|--|
| Alarm modes | Normal (solid on), flash (on & off), toggle (re-ring new alarms) |

| Control algorithms | EIVIR Version. On/OH, PASC, always on, always off |
|--------------------|---|
| | SSR Version: On/Off proportional PASC always on always of |

| Equipment protection | Ground fault trip, low / high temperature limit, Soft-Start features: (heat-trace output |
|----------------------|--|
| | limiting SSR overcurrent protection circuit breaker nuisance trip prevention) |

| Load shedding | Up to 8 zones, with temperature failsafe and communication timeout |
|---------------|--|
| | (requires nVent RAYCHEM Supervisor) |

| | \ ' | ' ' | | |
|----------|----------------------|--|---------------|--------------|
| Profiles | Built-in default set | ting profiles for commo | on heat trace | applications |
| | | and the second s | | |

| Network | Automatic network configuration with DHCP, or static IP configuration |
|---------|---|
| | |

| Firmware updates | User updateable using a USB thumb drive |
|--------------------------|---|
| Multi-language interface | English, French, German, Spanish, Russian |

Other Password protection, text tags / identifiers for controller and temperature sensors

Control & Monitoring

Connection terminals

| Power supply input | Screw terminals, 0.2 - 16.8 mm ² (24 - 5 AWG) |
|-----------------------------------|--|
| Heating cable voltage sense input | Screw terminals, 0.2 – 16.8 mm² (24 – 5 AWG) |
| Ground (Earth) | Screw terminal, 0.2 – 16.8 mm ² (24 – 5 AWG) |
| Torque range for screw terminals | 1.2 – 1.5 Nm |
| Sensor / Other terminals | Cage clamp terminals, 0.08 – 3.3 mm² (28 – 12 AWG) |

Communications

| RS485 | |
|----------------------|-----------------------------------|
| Туре | 2-wire RS485 |
| Cable | One shielded twisted pair |
| Length | 1,200 m (4,000 ft) maximum |
| Quantity | Up to 247 devices per port |
| Data Rate | 9600, 19.2 k, 38.4 k, 57.6 k baud |
| Parity | None, even, odd |
| Stop bits | 0, 1, 2 |
| Tx delay | 0 - 5 seconds |
| Protocol | Modbus RTU |
| Ethernet | |
| Туре | 10/100 BaseT |
| Length | 100 m (328 ft) maximum |
| Data rates | 10 or 100 MB/s |
| Protocol | Modbus/TCP, DHCP |
| Connection terminals | Shielded 8-pin RJ-45 |

APPROVALS

For use in ordinary area when using EMR contactors.

For use in ordinary and hazardous area Zone 2 (Gas) and Class I Div 2 for SSR or purged panel versions

Temperature classification

T4

Product certification









For certifications in other regions (FM, CSA, IEx, UL etc.), please refer to the installation manual.

More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.














| Description | Catalog Number | Part Number | Weight (kg/lbs.) |
|---|--|---|--|
| Elexant 4020i controller module with intrinsically safe barriers on RTD inputs. Single Phase loads. (Approved for Zone 2 locations. RTDs may be placed in Zone 0/ Zone 1/Zone 2 locations) | 10380-021 | 4020i-Mod-IS | 1.3/2.9 |
| Elexant 4020i controller module with intrinsically safe barriers on RTD inputs and functional safety limiter. Single Phase loads. (Approved for Zone 2 locations. RTDs may be placed in Zone 0/ Zone 1/Zone 2 locations) | 10380-022 | 4020i-Mod-IS-LIM | 1.2/2.6 |
| Elexant 4020i controller module with intrinsically safe barriers on RTD inputs. Three Phase loads. (Approved for Zone 2 locations. RTDs may be placed in Zone 0/ Zone 1/Zone 2 locations) | 10380-024 | 4020i-Mod-3P-IS | 1.3/2.9 |
| RTD Sensors Temperature Sensor with 2 m flexible cable and M16 gland, PT100 Temperature Sensor with 5 m flexible cable and M16 gland, PT100 Temperature Sensor with 10 m flexible cable and M16 gland, PT100 Temperature Sensor with 2 m MI Cable and Junction Box, PT100, ATEX Temperature Sensor with 2 m MI Cable and M16 gland, PT100, ATEX | MONI-PT100-260/2 MONI-PT100-260/5 MONI-PT100-260/10 MONI-PT100-EXE MONI-PT100-EXE- SENSOR | 1244-006615 1244-020817 1244-020816 967094-000 529022-000 | 0.14/0.3 0.35/0.8 0.7/1.5 0.5/1.1 0.13/0.3 |
| nVent RAYCHEM - Supervisor Software | Available for downloa | d at www.nVent.com | |



CONNECT AND PROTECT

Panel mounted electronic multi-circuit heat-tracing control, monitoring and power distribution system

PRODUCT OVERVIEW

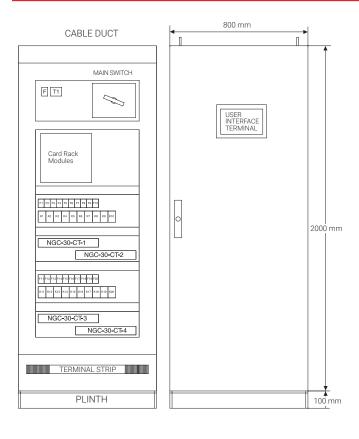

The nVent RAYCHEM NGC-30 is a multi circuit electronic control, monitoring and power distribution system for heat-tracing used in process temperature maintenance and freeze protection applications. The system consists of multiple components covering a broad range of requirements from simple temperature monitoring to ground fault, voltage and current measurement, bringing valuable information about the status and health of the heat-tracing circuits from the field into a central location. The nVent RAYCHEM NGC-30 system can minimise routine checks by transforming field data into valuable information for maintenance and operations.

nVent RAYCHEM NGC-30 panel

The nVent RAYCHEM NGC-30 is available as a complete distribution panel system. Typical characteristics for these panels are easy access, pre-wired and all wiring landed on easy accessible terminals. The enclosure is based on industrial standards while the wiring is optimised for maintenance purposes. The panels are equipped with earth leakage circuit breakers and a main circuit breaker. In addition to these standard features the customer can select additional options based upon the heat-tracing monitoring and control requirements. For example the options include types of contactors (solid state or mechanical), number of circuits plus spare required, voltage monitoring, alarm light indications, panel size, cable entry location and other parameters. A nVent RAYCHEM NGC-30 panel system can consist of multiple cabinets which are interlinked via a dedicated communication link. In general the master panel contains the User Interface Terminal (UIT), typically built into the door.

nVent RAYCHEM NGC-30 components

Customers who wish to integrate the nVent RAYCHEM NGC-30 system into their own control panels can obtain the individual components separately. The nVent RAYCHEM NGC-30 system is configurable in different ways depending upon the requirements of the customer. The user interface for the nVent RAYCHEM NGC-30 is the User Interface Terminal (NGC-UIT3-EX). As soon as ground-fault measurement, line current measurements or distributed control requirements become important, the components Card Rack (CR), Card Rack Modules for mechanical relays (CRM) and/or solid state relays (CRMS), Current Transformer Modules (CTM) and Voltage Module (CVM) should be chosen. The nVent RAYCHEM NGC-30 system has two Remote Measurement Modules available. These modules are the RMM3 for temperature measurement and the RMM2-DI for digital inputs. Users who want to build on the known and proven technology used in the MoniTrace 200N-E can continue using the fully compatible components; Remote Monitoring Module (RMM3) and Remote Modules for Control (RMC).

The powerful nVent RAYCHEM Supervisor heat-tracing controller configuration and monitoring PC-software package completes the system. The Client - Server application enables the user to access all information from anywhere in the world, making nVent RAYCHEM Supervisor a strong management tool for the entire Heat Management System.










Control & Monitoring

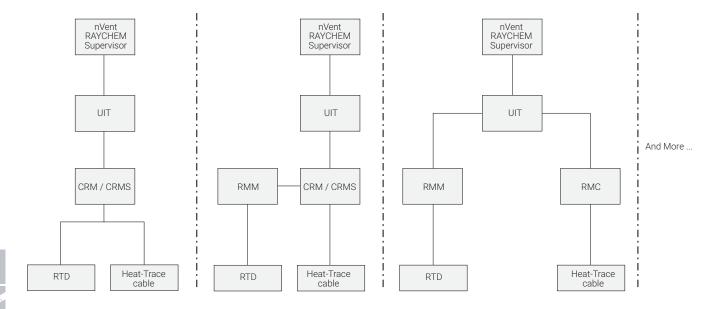

Examples of various nVent RAYCHEM NGC-30 configurations

The following section gives an overview of the different components used in the nVent RAYCHEM NGC-30 system.

nVent RAYCHEM User Interface Terminal (UIT)




The nVent RAYCHEM User Interface Terminal (NGC-UIT3-EX) is the central part of the nVent RAYCHEM NGC-30 communication. The UIT can be used as well with the nVent RAYCHEM Elexant 5010i and NGC-20 (for more information see the nVent RAYCHEM Elexant 5010i and NGC-20 datasheet).

It covers heat-tracing monitoring, configuration and maintenance purposes. The nVent RAYCHEM User Interface Terminal (NGC-UIT3-EX) consists of a 8.4" LCD colour display using touch screen technology. This provides an easy user interface for programming without the need for keyboards or cryptic labels.

The nVent RAYCHEM UIT communicates via RS-485 to the field and via RS-232/RS-485/ Ethernet (selectable) to the nVent RAYCHEM Supervisory Software package as well as the plant process control system. The user interface terminal is available in two different models; the nVent RAYCHEM NGC-UIT3-EX is for direct mounting on the nVent RAYCHEM NGC-30 panel door. The Remote User Interface Terminal (NGC-UIT3-ORD-R) is a panel mounted display (NGC-UIT3-EX) for use with the nVent RAYCHEM NGC-30 panel that allows for the user interface to be mounted remotely.

For detailed description see installation instruction RAYCHEM-IM-H86181-NGCUIT3EX.

Card Rack Module (CRM/CRMS)



The nVent RAYCHEM Card Rack Module controls up to 5 heat-tracing circuits. The Card Rack Modules are available in two versions, the nVent RAYCHEM NGC-30 CRM (for mechanical relays) and the nVent RAYCHEM NGC-30 CRMS (for solid state relays). Up to four of these Card Rack Modules can be installed in a panel mounted Card Rack. RTD's are either directly connected to the nVent RAYCHEM CRM(S) or alternatively collected via RMM's locally or centralized in the field (distributed architecture). The CRM/ CRMS solution can control up to 260 individual heat-tracing circuits and monitor up to 388 temperature inputs (including 128 temperature inputs via RMMs).

Current Transformer Module (CTM)




nVent RAYCHEM Current Transformers are an important part of the nVent RAYCHEM NGC-30 system. nVent RAYCHEM CRM in combination with current transformers offer the capability of monitoring and alarming on ground-fault and operating currents. Circuits can be tripped by the controller on high ground-fault currents.

Voltage Module (CVM)



nVent RAYCHEM Voltage modules (CVM), used in combination with a nVent RAYCHEM CRM(S) offer the option to monitor the voltage in the panel. The nVent RAYCHEM CVM module uses one channel on one nVent RAYCHEM CRM board in a panel.

Remote Modules for Control (RMC)




The nVent RAYCHEM NGC-30 system also includes integrated control functionality. Multiple relay outputs to operate contactors of each heat-tracing circuit will be provided by Remote Modules for Control (RMC). Temperature inputs will be provided by Remote Monitoring Modules (RMM) while the control is executed by the UIT.

nVent RAYCHEM RMC units are modular and may be configured with 2 to 40 relay outputs. Each RMC unit also includes two digital inputs (DI) to monitor the status of circuit breakers or power contactors. A single UIT control unit can communicate with up to 10 RMC modules via a single, twisted pair RS-485 cable to provide distributed control of up to 250 heating cable circuits with a maximum of 128 temperature inputs (see nVent RAYCHEM RMM below). For more information refer to the datasheet of nVent RAYCHEM MONI-RMC. Circuits controlled via RMCs, can't be combined with the current transformers (CTM).

The nVent RAYCHEM NGC-30 system also supports building mixed systems of relay outputs via CRM(S) and RMCs, individual circuits can therefore be configured in the most appropriate way.

Remote Monitoring Modules (RMM3) for temperature measurement




Remote Monitoring Modules (RMM3) provide temperature monitoring capability for the nVent RAYCHEM NGC-30 system.

The RMM accepts inputs up to eight Pt 100 temperature sensors that measure pipe or ambient temperatures in a heat-tracing system. Up to 16 RMMs for a total monitoring capacity of 128 temperatures can be connected to the NGC-30 system.

There are two versions available. The RMM3 is without an enclosure. The RMM3-EX-E is build into a Hazardous approved enclosure. For more details see the RMM3 datasheet.

Remote Monitoring Modules (RMM2-DI) for digital input




Remote Monitoring Module for Digital Inputs (RMM2-DI) provides digital input monitoring capability for the nVent RAYCHEM NGC-30 system. The RMM2-DI accepts inputs up to 15 digital inputs per module. Up to 247 RMM-DI modules can be connected to the nVent RAYCHEM NGC-30 system. The RMM2-DI module can be installed in ATEX / UKEx / IECEX Zone 2 hazardous area. For more details see the RMM2-DI datasheet.





nVent RAYCHEM Supervisory Software



The nVent RAYCHEM NGC-30 system integrates seamless with the nVent RAYCHEM Supervisor heat-tracing controller configuration and monitoring software. It provides a graphical user interface for nVent RAYCHEM communication and heat-tracing controller products. The software supports the latest nVent RAYCHEM control systems via ModBus® protocol. nVent RAYCHEM Supervisor is a powerful client-server software package that gives the possibility to configure and monitor controllers from almost anywhere in the world, using the latest connectivity technologies. In addition to this functionality nVent RAYCHEM Supervisor includes the following functions:

- Logging & trending
- Configuration of alarms
- Batch & recipe processing
- Scheduled events
- Group displays for monitoring multiple controllers at the same time
- Virtual Private Network (VPN) functionality for monitoring possibility on global basis
- Plant Reference Model for structuring controller on a logical way
- Support of plant documentation reports like plant group, location, line/equipment number, breaker panel, controller panel, user and roles are included.

For more detailed information see nVent RAYCHEM Supervisor datasheet.


PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS | |
|-------------------------------------|--|
| Technical details | |
| Туре | Surface Sensing/Ambient Sensing/PASC (Proportional Ambient Sensing Control) |
| Display | |
| Туре | LCD is a XGA, colour TFT transflective device with integral LED backlight |
| Screen size | 175 mm x 132 mm |
| Touchscreen | 5-wire resistive touch screen interface for user entry, usable with gloved fingers |
| Programming and settings | |
| Method | Via touch screen or nVent RAYCHEM Supervisor 2.1 or higher |
| Language(s) | English, Russian, French, German, Spanish, Czech, Chinese |
| Memory | Non-volatile, restores after power loss |
| Enclosure | |
| Protection | UIT: IP 65 (NEMA 4) when mounted in a panel door. |
| Ambient operating temperature range | UIT: -40°C to 60°C CRM(S): -40°C to 60°C, storage temp -40°C to 75°C |
| Electrical properties | |
| Connection terminals | UIT and CRM both are equipped with 2.5 mm ² Phoenix style connectors with retaining screws. |
| Power supply | The NGC-UIT3-EX requires supply voltage of 9-30 V DC, 3.6-1.2 A. The CRM's powered by 12 V DC @ 400 mA per board. For more information about RMC and RMM see datasheets of individual components |
| Power consumption | UIT: 36 W max, CRM/CRMS: 5 W max. |
| Power output | CRM and CTM are calibrated for a maximum load of 60 A |
| Control output | Wired directly to contactor or SSR CRM: SPST 3 A @ 277 V AC max 50/60 Hz CRMS: 12 V DC @ 30 mA max per output |



| Hardware (UIT) | | | |
|--|--|---|--|
| Local port/ remote port; Communication | Isolated RS232/RS-485, solor | stable. Ports may be used to communicate with | |
| port 1 UIT | Isolated RS232/RS-485, selectable. Ports may be used to communicate with (nVent RAYCHEM Supervisor Software) or DCS. | | |
| | The local RS-232 is a non-isolated, 9 pin D sub male; | | |
| | Remote RS-485 #2 is 2-wire is | | |
| | Data rate is 9600 to 57600 ba | | |
| | Maximum cable length for RS-485 not to exceed 1200 m (4000 ft). Cable to be shielded twisted pair. | | |
| | Max number of devices 247, Fail safe design with optional termination resistors | | |
| | Max length 1200 m, Data rate to 9600 baud. | | |
| Field port; communication port 2 UIT | RS485, used to communicate with external devices like RMM, RMC and NGC-30. typical max. cable length 1200 m, cable to be shielded twisted pair. | | |
| LAN UIT | | with link and activity status LEDs. Protocol Modbus via TCP/ ate to nVent RAYCHEM Supervisor | |
| USB Port UIT | USB 2.0 Host port type A rece | eptable | |
| Configuration | | | |
| Temperature (UIT) | Low alarm range | −73°C to 482°C or off | |
| , , , | High alarm range | -73°C to 482°C or off | |
| Ground fault monitoring | Alarm range | 10 mA to 200 mA | |
| (UIT, CRM, CT) | Trip range | 10 mA to 200 mA or off | |
| Operating current (UIT, CRM, CT) | Low alarm range | 1 A to 60 A or off | |
| | High alarm range | 1 A to 60 A or off | |
| Voltage (CRM, CVM; optional) | Displays supply voltage to hea | | |
| reitage (eritti, eritti, epiterial) | (Note: requires one operating | | |
| Autocycle | Each loop can be programme | | |
| Temperature sensor inputs | One input standard per control point on CRM, optional temperature inputs via max. 16 RMMs (8 RTDs per RMM) | | |
| Control modes | EMR: line sensing on/off, amb PASC (proportional amb | | |
| | SSR: line sensing on/off, amb PASC (proportional amb Proportional (includes so | | |
| Units | °C or °F | | |
| Deadband | 1°C to 10°C | | |
| Alarm outputs | | | |
| UIT: 3 (3 open collector outputs, to be con | nbined with external relays) | | |
| Control outputs | | | |
| Number of output relays | CRM: 3-pole mechanical | | |
| | CRMS: 1, 2 or 3 pole solid stat | te, normally open (NO) | |
| Current maximum, used in combination with CRM(S) and CTM | SSR: 60 A at 40°C EMR: 60 A at 40°C | | |
| Network connection | | | |
| Number of RMM's | Up to 16, individually addressable, each with up to 8, 3 wire Pt 100 inputs | | |
| Number of CRM/CTM's | Up to 52 NGC-30-CRM may be connected to one NGC-30-UIT in combination with repeaters. 1 CRM has 5 circuits. In total 260 circuits per NGC-30 system. | | |

nVent.com/RAYCHEM | 201



Temperature classification

T5

Product certification









For certifications in other regions (FM, CSA, IEx etc.), please refer to the installation manual.

More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM

ORDERING INFORMATION

NGC-30 control system

The NGC-30 is offered as a complete solution, where the control system is already integrated into fully engineered control and power distribution panels. Using standard industrial enclosures, specific care has been taken to design the systems to highest safety standards by enabling optimum access for easy maintenance, as well a clear layout of the functional blocks and terminals. Customers desiring to build their own systems, can use the individual components of the nVent RAYCHEM NGC-30 and integrate them into their own power distribution panels. Below both options are described how to order the NGC-30 system.

Individual components

| Product Name | Description | Part Number (Weight) |
|----------------|---|-----------------------|
| RMM3 | Eight RTD inputs, no enclosure RMM3 | 1244-022749 (0.7 kg) |
| RMM3-24VDC | Eight RTD inputs, no enclosure RMM3-24VDC | 1244-022782 (0.7 kg) |
| NGC-UIT3-EX | User Interface Terminal | 10332-034 (1.78 kg) |
| NGC-UIT3-ORD-R | User Interface Terminal with enclosure | 10332-035 (8.86 kg) |
| NGC-30-CRM | Card Rack Module (EMR) | 10720-001 (0.68 kg) |
| NGC-30-CRMS | Card Rack Module (SSR) | 10720-004 (0.50 kg) |
| NGC-30-CTM | Current Transformer Module | 10720-002 (0.36 kg) |
| NGC-30-CVM | Voltage Monitoring Module (CVM) | 10720-005 (0.20 kg) |
| NGC-30-CR | Card Rack | 10720-003 (3.66 kg) |
| PS12 | Transformer 12 V DC | 1244-001505 (0.18 kg) |






CONNECT AND PROTECT

Panel mounted advanced modular heat-tracing control system

PRODUCT OVERVIEW

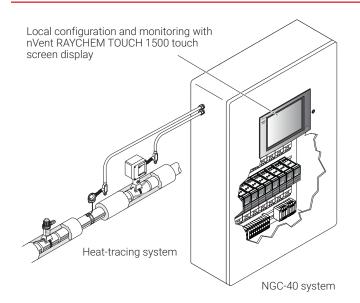

The nVent RAYCHEM NGC-40 is a multipoint electronic control, monitoring and power distribution system with a unique single-point controller architecture providing the most reliable central control and monitoring solution for your Heat Management System.


By taking advantage of innovative modular packaging techniques, the NGC-40 system provides configuration and component flexibility so that it may be optimised for a customer's project specific needs.

Control & Monitoring





Control modules: NGC-40-HTC & NGC-40-HTC3



The NGC-40 uses a single controller module per heat-tracing circuit for maximum reliability. The NGC-40 control system can be powered between 100 to 240 Vac, while mechanical contactors (EMRs) or solid-state relays (SSRs) allow circuit switching up to 60 A at 600 Vac.

There are dedicated control modules available for single phase (NGC-40-HTC) and three-phase (NGC-40-HTC3) heat-tracing circuits. The NGC-40 control modules include ground-fault detection and protection. The control modules guarantee precise single phase and three-phase line current measurements. Up to eight (8) temperature sensors (RTDs) can be used for each heat-tracing circuit allowing a variety of temperature control, monitoring, and alarming configurations. The NGC-40 provides alarm outputs and digital inputs. The alarm output can be used to control an external

The digital input is programmable and may be used for various functions such as forcing outputs on and off or generating alarms, making the system more flexible to match each customer's specific needs.

Safety temperature limiter: NGC-40-SLIM



The NGC-40 has a certified safety temperature limiter module.

The module can be used with up to 3 temperature inputs for three phase heat-tracing circuits. The limiter can be associated with a NGC-40 controller and use current information for latching the trip functionality. The front panel of the limiter module has LED indicators for various status conditions. The front panel also provides a button to confirm new set trip point, a reset trip button and a reset alarm button. The module has one output for the contactor and one output for external alarm annunciation. The safety temperature limiter can be reset via the digital input, the user interface nVent RAYCHEM TOUCH 1500 and nVent RAYCHEM Supervisor.

IO module: NGC-40-IO



In addition to hardwiring an RTD directly into a Heat Trace Control module, RTDs can be wired to Input/output modules (NGC-40-IO) within the panel and assigned to heattracing circuits through software. This means that a NGC-40 system can be optimised for the specific application needs. Each IO module accepts up to four additional RTD inputs.

RMM2




The NGC-40 works with the MONI-RMM2 module. Each RMM2 module installed in the field can accept up to 8 RTDs. 16 RMM2 Modules can be daisy chained together via RS-485 for a total of 128 temperature inputs. Since multiple RMM2s can be networked over a single cable to the NGC-40, the cost of RTD field wiring will be significantly reduced

Communication module: NGC-40-BRIDGE



The NGC-40 system supports multiple communications ports, allowing serial interfaces (RS-485 and RS-232) and network connections (Ethernet) to be used with external devices. All communications with the NGC-40 panel are accomplished through the NGC-40-BRIDGE module which acts as the central router for the system, connecting the panel's control modules, IO modules, safety limiter modules, RMM2 Modules, as well as upstream devices such as TOUCH 1500 touch screen, Supervisor and Distributed Control System (DCS). Communications to devices external to the NGC-40 panel are done via Modbus® protocol over Ethernet, RS-485 or RS-232.

nVent RAYCHEM TOUCH 1500



The nVent RAYCHEM TOUCH 1500 is a panel mounted display used in conjunction with NGC-20 and NGC-40 Control and Monitoring Systems devices. The TOUCH 1500 is rated IP 65 (NEMA 4) and can be mounted both indoors and outdoors. The TOUCH 1500 kit includes all hardware required for mounting in a suitable electrical panel. TOUCH 1500R, a remote version of TOUCH 1500, is also available as a standalone solution for applications in which the controllers are not in the same location as the user interface.

Make Your Systems Talk!

Now more than ever, open communication systems, data integration, easy configuration and real-time monitoring are critical components of running an industrial installation. With the latest TOUCH 1500 software, nVent offers the full data integration of its heat tracing systems with process control systems, allowing for the reduction of maintenance and energy costs and, consequently, increasing process productivity. TOUCH 1500 to DCS means "data a la carte." The heat tracing data you want, in your preferred format for your DCS system.

nVent RAYCHEM Supervisor software



The nVent RAYCHEM Supervisor software package provides a remote, graphic interface for the NGC-40. The software allows the user to configure and monitor various NGC systems from a central location. It also provides an audible alarm tone, acknowledges and clears alarms; and contains advanced features such as data logging, trending, implement changes in batches, and other useful functions. Users can access all information from anywhere in the world, making Supervisor a powerful management tool for the entire Heat Management System.

PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS | |
|----------------------------------|--|
| Electromagnetic compatibility | |
| Emissions | EN 61000-6-3 |
| Immunity | EN 61000-6-2 |
| Supply voltage | 24 Vdc +/- 10% |
| Internal power consumption | < 2.4 W per module |
| Ambient operating temperature | -40°C to +65°C (-40°F to +149°F) |
| Ambient storage temperature | -40°C to +75°C (-40°F to +167°F) |
| Environment | PD2, CAT III |
| Maximum altitude | 2,000 m (6,562 ft) |
| Humidity | 5 – 90% non-condensing |
| Mounting | Din Rail – 35 mm |
| Can networking port | |
| Туре | 2-wire isolated CAN-based peer to peer network. Isolated to 24 Vdc – verified by 500 Vrms dielectric withstand test |
| Connection | Two 8-pin RJ-45 connectors (both may be used for Input or Output connections) Protocol Proprietary NGC-40 |
| Topology | Daisy chain |
| Cable length | 10 m (33 ft) maximum |
| Quantity | Up to 80 HTC/HTC3 and IO modules per network segment |
| Address | Unique, factory assigned |
| Connection terminals and housing | |
| Wiring terminals | Spring-type, 0.5 to 2.5 mm ² (24 to 12 AWG) |
| Housing size | 45.1 mm (1.78 in) wide x 87 mm (3.43 in) high x 106.4 mm (4.2 in) deep |
| NGC-40-HTC/NGC-40-HTC3 | |
| Temperature sensors | Type 100 Ω platinum RTD, 3-wire, α = 0.00385 ohms/ohm/°C. Can be extended with a 3-conductor shielded cable of 20 Ω maximum per conductor 100 Ω , Ni-Fe, 2-wire. Can be extended with a 2-wire shielded cable of 20 Ω maximum per conductor |
| Quantity temperature sensors | One per NGC-40-HTC/HTC3 module |
| Measuring range | Temperature range from -80°C to +700°C (-112°F to 1292°F) |
| Current measurement | Internal to the module |
| Current measurement NGC-40-HTC | 1 for single-phase line current measurements, 60 A, +/- 2% of range |
| Current measurement NGC-40-HTC3 | 3 for three-phase line current measurements, 60 A, +/- 2% of range |
| Ground-fault | 1 for ground-fault measurements, 10-250 mA, +/- 2% of range |
| Alarm relay | Dry contact relay (voltage free). Relay contact rated 250 V/3 A 50/60 Hz (EC) and 277 V/3 A 50/60 Hz (cCSAus). Alarm relay is programmable. N0 and NC contacts available. |
| Contactor output relay | Relay contact rated 250 V/3 A 50/60 Hz (EC) and 277 V/3 A 50/60 Hz (cCSAus). |
| SSR output | 12 Vdc @ 45 mA max per output |
| Digital input | Multi-purpose input Multi-purpose input for connection to external dry (voltage-free) contact or DC voltage. May be user programmable for: not used/force off/force on functions. It can be configured to be active open or active closed. |



NGC-40-SLIM

| 1100 10 02 | |
|------------------------------|---|
| Conditions of use | See installation instructions |
| Measuring range | Temperature range limiter from +50°C to +500°C (-22°F to 932°F) |
| Temperature sensor | Type: $100~\Omega$ platinum RTD, 3-wire, α = 0.00385 ohms/ohm/°C. Can be extended with a 3-conductor shielded cable of $20~\Omega$ maximum per conductor. Quantity: 3 per NGC-40-SLIM module. |
| Digital input | Used for resetting the safety temperature limiter remotely. The Digital Input will be for connection to external dry (voltage free) contactor or DC voltage. The input shall be 5 – 24 VDC/1 mA max with 100 ohms of loop resistance and configured as active low. |
| NGC-40-I0 | |
| Temperature sensors | Type 100 Ω platinum RTD, 3-wire, α = 0.00385 ohms/ohm/°C. Can be extended with a 3-conductor shielded cable of 20 Ω maximum per conductor 100 Ω , Ni-Fe, 2-wire. Can be extended with a 2-wire shielded cable of 20 Ω maximum per conductor. |
| Quantity temperature sensors | Up to four wired directly to each NGC-40-IO module |
| Alarm relay | Dry contact relay (voltage free). Relay contact rated 250 V/3 A 50/60 Hz (EC) and |

277 V/3 A 50/60 Hz (cCSAus). Alarm relay is programmable. NO and NC contacts available.

Multi-purpose input for connection to external dry (voltage-free) contact or DC voltage. May be

NGC-40-BRIDGE

Digital input

| | Communications COM1, COM2 | Communications COM3 |
|----------------------|--|--|
| Туре | 2-wire RS485 | RS232 |
| Cable | One shielded twisted pair | Custom TTC# 10332-005 |
| Length | 1,200 m (4,000 ft) maximum | 15 m (50 ft) maximum |
| Quantity | Up to 255 devices per port | 1 |
| Data rate | 9600, 19.2K, 38.4K, 57.6K, 115.2K baud | 9600, 19.2K, 38.4K, 57.6K, 115.2K baud |
| Data bits | 7 or 8 | 7 or 8 |
| Parity | None, even, odd | None, even, odd |
| Stop bits | 0, 1, 2 | 0, 1, 2 |
| Tx delay | 0 - 5 sec. | 0 - 5 sec. |
| Protocol | Modbus RTU or ASCII | Modbus RTU or ASCII |
| Connection terminals | Spring-type terminals | RJ-11 |

user programmable for: not used/force off/force on functions.

It can be configured to be active open or active closed.

Ethernet

| NCC-40-PTM | | |
|----------------------|---|--|
| Connection terminals | Shielded 8-pin RJ-45 connector on front of module | |
| Protocol | Connection terminals | |
| Data rates | 10 or 100 MB/s | |
| Length | 100 m (328 ft) | |
| Type | 10/100 BaseT Ethernet network | |

NGC-40-PTM

| Connection terminals | Spring-type, 0.5 to 2.5 mm² (24 to 18 AWG). As the current to the modules require up to 2.05 A @ 24 Vdc (20 modules - see CAN Bus connection diagrams) the minimum wire size to the module shall be 1.0 mm² (AWG18) |
|---------------------------------|---|
| CAN networking and module Power | Two RJ-45 connectors, one each IN and OUT. Provides CAN bus signals and 24 Vdc power. |

Control & Monitoring

TOUCH 1500

| 100CH 1300 | |
|-----------------------|--|
| General | |
| Area of use | Non-hazardous, Indoors (IP65, NEMA 4) |
| Supply voltage | 10 - 30 Vdc |
| Amperage rating | Steady state 1.8 A |
| Surge current | 16 A |
| Operating temperature | 0°C to +50°C (32°F to +122°F) w/o space heater, -30°C to +50°C (-22°F to +122°F) using space heater and screen cover |
| Storage temperature | -20°C to +60°C (-4°F to 140°F) |
| Dimensions | 449.9 mm (W) X 315.6 mm (H) X 141.7 mm (D) |
| Relay outputs | One Form C relay rated at 12 A @ 250 Vac. Relay is used as a common alarm. To be ordered separately |
| Display | LCD is a 15-in XGA, color TFT transflective device with integral CCFL backlight Touch Screen 4-wire resistive touch screen interface for user entry |
| Network connection | |
| Local/Remote port | RS232/RS485 ports may be used to communicate with host (Supervisor Software) or DCS 9 pin D sub male |
| Remote RS485 | 2-wire isolated, 9 pin D sub male Data rate 9600 to 57600 baud Maximum cable length not to exceed 1200 m (4000 ft). Cable length to be shielded, twisted pair. |
| Field port | RS485, 2-wire isolated, used for communication with external devices, such as RS485 NGC-40-BRIDGE and NGC-20. Maximum cable length not to exceed 1200 m (4000 ft). Cable to be shielded twisted pair. Signals 2-wire isolated, 9 pin D sub male Data rate to 9600 baud |
| LAN | 10/100 Base-T Ethernet port with Link and Activity Status LEDs (X2) |
| USB ports | USB 2.0 Host port Type A receptacle (X4) |

APPROVALS

For use in ordinary (non-hazardous) area

When system is applied to heat tracing circuits in hazardous areas, hazardous area approved sensors need to be used.

Temperature classification

Τ4

Product certification











More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.





ORDERING INFORMATION

| Product Name | Description | Part Number |
|-----------------|--|--------------|
| NGC-40-HTC | NGC-40 single phase heat trace control module | 10730-003 |
| NGC-40-HTC3 | NGC-40 three phase heat trace control module | 10730-004 |
| NGC-40-SLIM | NGC-40 Safety Temperature Limiter | 1244-010700 |
| NGC-40-IO | NGC-40 Input - Output Module | 10730-001 |
| NGC-40-BRIDGE | NGC-40 Communication Bridge Module | 10730-002 |
| NGC-40-PTM | NGC-40 Power Termination Module | 10730-005 |
| TOUCH 1500-EX | TOUCH 1500 combined computer and 15" touch screen. Alarm output embedded in unit, ATEX / IECEX Zone 2 approved | 10332-036 |
| TOUCH 1500-EX-R | TOUCH 1500 in safe area enclosure for remote mounting on wall | 10332-037 |
| NGC-40-CAN05 | NGC-40 CAN Cable Length 5" | 20578011-005 |
| NGC-40-CAN48 | NGC-40 CAN Cable Length 48" | 20578011-048 |
| NGC-40-TB | CANbus termination plug | 10392-043 |
| MONI-RMC-PS24 | 24 Vdc Power supply | 972049-000 |



CONNECT AND PROTECT

Single-circuit electronic controller with dual display

PRODUCT OVERVIEW



The nVent RAYCHEM TCONTROL-05 family of electronic controllers provide accurate temperature control and centralized monitoring for individual heat-tracing circuits.

The compact panel mount TCONTROL-05 has two displays for indicating the process value and the set point. During programming these displays provide user guidance and visual aid to simplify commissioning.

Alternatively, the optional and easy to use TCONTROL-05/CONFIG software can be used for computer aided configuration.

TCONTROL-05 units are factory configured for ON/OFF control and are suitable for most heat-tracing applications. Other types of control algorithms can be configured by the user.

Different hardware configurations are available: Units with a relay output for controlling electro-mechanical relays or solid state relays and TCONTROL-05/MA units with an analog output for driving other types of actuators like thyristors.


The health of the temperature input sensor is permanently monitored for failures. An alarm will appear in the event of sensor break or short circuit. In the event of a sensor failure the control output switches to a user defined state (ON or OFF)


Specific features:

- Time delayed controller activation after initial power up (this can be used to avoid peak demands during start-up)
- · Service counter included in order to count and eventually alarm on the number of relay operations.

PRODUCT SPECIFICATIONS

Dimensions (mm)





| 00000000000000000000000000000000000000 |
|--|
|--|

| Minimum spacing in between panel cut-outs | Horizontal spacing | Vertical spacing |
|---|--------------------|------------------|
| TCONTROL-05 (all types) | > 15 mm | > 30 mm |









Technical details

| Application | nVent RAYCHEM TCONTROL-05 units are panel mount controllers and are typically used for providing tight temperature control of individual heat-tracing circuits. | | |
|-------------------------|---|---|--|
| Memory data backup | EEPROM based non-volatile memory. No loss of configuration data after power ou | EEPROM based non-volatile memory. No loss of configuration data after power outage or long term shut down. | |
| Display | 2 piece 18 segment LCD displays | | |
| Supported control modes | ON/OFF, P, PI, PD or PID with auto-tuning are user selectable | | |
| Measuring accuracy | PT100 3-wire | error ≤ 0.1%, | |
| | PT100 2-wire | error ≤ 0.1% | |
| | Thermocouples (incl. cold junction) | error ≤ 0.25% | |
| | Voltage and current inputs | error ≤ 0.1% | |

Electrical Properties

| Supply voltage & own power consumption | 110 Vac to 240 Vac -15/+10%, 48 to 63 Hz & ~4.1 VA |
|---|---|
| Electrical connections | Via screw terminals on the back of the unit. Terminals are suitable for wires ranging from 1 to maximum 1.3 mm ² solid core or 1 mm ² stranded with cable shoe. Terminal strips are pluggable. |
| Supported output types (depending on model) | TCONTROL-05: 3 relay outputs (SPST) + 1 logic output TCONTROL-05/MA: 2 relay outputs (SPST) + analog output TCONTROL-05/COM: 3 relay outputs (SPST) + 1 logic output + RS485 TCONTROL-05/COMA: 2 relay outputs (SPST) + analog output + RS485 |

Input options (all types)

| Temperature sensor inputs | PT100, PT1000 RTD's in 2- and 3 wire connection, KTY11-6 sensors Thermocouple types: L, J, U, T, K, E, N, S |
|---------------------------|--|
| Electrical input signals | 0/4 20 mA or 0/2 10 V (Ri = 100 Kohm) |
| Temperature control range | From -200°C to + 2400°C depending on the type of temperature sensor used |

Output options and output ratings (depending on type)


| TCONTROL-05 TCONTROL-05/COM | Control and alarm relay contacts (SPST) are rated 3 A at 230 VAC. Expected lifetime: 350 k operations at rated current or ~900 K operations at 1 A Logic output 0 12 V. Maximum current 20 mA |
|------------------------------------|---|
| TCONTROL-05/MA TCONTROL-05/COMA | Control output, analog: 0/4 20 mA Rload ≥ 500 Ohm Logic output 0 12 V, maximum current 20 mA Alarm relay contacts (SPST) are rated 3 A at 230 VAC. Expected lifetime: 350 k operations at rated current. 900 k operations at 1 A |
| Communication options (*) | RS485, Modbus at 9600, 19200 or 38400 BPS. Maximum up to 32 devices per network. (*) |
| Alarm options | 2 independently configurable alarm relay outputs are provided. TCONTROL-05 units automatically alarm in case of sensor break or sensor short. On top of the input sensor driven alarms up to 8 different temperature triggered alarm functions can be defined. (see installation instructions for details) |

^(*) supported on TCONTROL-05/COMx units only

Enclosure

| Housing type | Plastic enclosure approved to IEC 61554 (ABS) Suitable for installation in electrical distribution panels |
|----------------------------|---|
| Environmental protection | Front IP65, rear IP20 to DIN EN60529 |
| Max. operating temperature | −10°C to +55°C |
| Max. storage temperature | −30°C to +70°C |
| Relative humidity | 90% maximum, no condensation |
| Installation position | All positions allowed |

Connection diagram

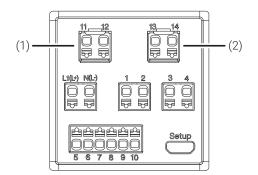

| Terminals | Connection |
|-----------|------------------|
| 1, 2 | Output 1 (relay) |
| 3, 4 | Output 2 (relay) |
| 5-8 | Analog input |

| Terminals | Connection |
|-----------|--|
| 8, 10 | Input 2 (for potential-free contact) |
| 9, 10 | Input 1 (for potential-free contact) or output 3 (logic output) |
| 11, 12 | (1) = option 1: output 4 (relay, logic output) or RS485 interface |

| Terminals | Connection |
|------------------|---|
| 13, 14 | (2) = option 2: output 5 (relay, logic or analog output) |
| L1(L+), N(L-) | Voltage supply |
| Setup (USB) | PC (setup program) |

APPROVALS

For use in ordinary area (indoors, panel mount - through the panel)

Electrical Safety to DIN EN 61010-1 over voltage category II, pollution degree 2 EMC DIN EN 61326 -1, Class A to industrial requirements.

Product certification



More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

Wiring example

| | Part Description | PN | Weight |
|---------------|------------------|-------------|------------|
| Control units | TCONTROL-05 | 1244-022496 | ~ 0.125 kg |
| | TCONTROL-05/MA | 1244-022497 | |
| | TCONTROL-05/COM | 1244-022499 | |
| | TCONTROL-05/COMA | 1244-022498 | |

Accessory selection table

| Configuration and setup interface + | TCONTROL-05/CONFIG | 1244-022500 | ~ 0.120 kg | |
|-------------------------------------|--------------------|-------------|------------|--|
| software | | | | |

Accessory selection table

| Sensors for hazardous area | MONI-PT100-EXE (1), (2) | 967094-000 |
|---|-------------------------|------------|
| | MONI-PT100-4/20MA | 704058-000 |
| Sensor for non-hazardous area | MONI-PT100-NH | 140910-000 |
| Support bracket for temperature sensors | JB-SB-26 | 338265-000 |

- Sensor can be extended with a 3-wire shielded cable of max 30 Ohms per conductor (max. 150 m with a 1.5 mm² cable). Note 1: The sensor cable should be shielded if it is laid in cable ducts or in the vicinity of high-voltage carrying cables. The shield of the extension cable should be grounded at the controller end only.
- MONI-PT100-EXE temperature sensors can be directly connected to the TCONTROL-05 input terminals. There is no need to use current Note 2: limiting devices such as zener barriers or isolators.
- Installed in ordinary area. Note 3:



Elexant 450c / Elexant 450c-Modbus



CONNECT AND PROTECT

Electronic controller for pipe freeze protection and temperature maintenance systems

PRODUCT OVERVIEW



The nVent RAYCHEM Elexant 450c controller is designed for operation with the nVent RAYCHEM heating cables.

The Elexant 450c is available in 2 versions:

- Elexant 450c standard version
- Elexant 450c-Modbus version allowing flexible Modbus connectivity for remote monitoring, configuration, and ease of integration in a Building Management System (BMS).

FEATURES

- Intuitive set-up and programming of the unit with a 4,3" colour touch screen
- Flexible temperature control of pipe freeze protection and temperature maintenance systems
- · Controls 2 independent heating circuits
- · Pipe line sensing and/or ambient sensing
- Proportional Ambient Sensing Control (PASC) algorithm for enhanced energy savings in ambient sensing mode
- Alarm relay with change over contact to signal power, temperature or communication problems
- Pipe line temperature monitoring with high and low temperature alarm
- Offsite configurable can be set up prior to final installation
- DIN rail panel mountable
- The Elexant 450c-Modbus is equipped with a RS485 port for Modbus communication to a BMS system which can be used for configuration, monitoring and alarm purposes.

GENERAL

| Non-hazardous locations; for nVent RAYCHEM heating cables | |
|--|--|
| | |
| 230 VAC -15/+10%; 50 Hz | |
| 4 VA | |
| 2 x 4 A / 230 VAC | |
| 3 x 1.5 mm ² | |
| 2 x 2 x 1.5 mm ² | |
| 3 x 1.5 mm ² | |
| 2 x 2 x 1.5 mm ² | |
| 3 x 1.5 mm ² | |
| Single pole double throw relay, voltage – free, rating 2 A/250 VAC | |
| Automatic summer/winter time and leap year connection | |
| 3 years | |
| +/- 10 minutes per year | |
| Password protection for parameter settings | |
| For preset-up in power off mode and firmware upgrade | |
| All settings are stored in non-volatile memory | |
| | |


0°C to +40°C


Exposure temperature

ENCLOSURE

| Dimensions | 158 mm x 110 mm x 56 mm |
|--------------------------|-------------------------------------|
| Ingress protection class | IP20 |
| Material | PPE |
| Mounting option | DIN-Rail mountable 35 mm, in panel |
| Storage temperature | -20°C to +50°C |
| Flammability class | D category (DIN EN60730/VDE0631-1) |
| Weight | 550 g |

TYPICAL ENCLOSURE DIMENSIONS AND MODULE LAYOUT





- 1. Touch screen, size 4.3"
- 2. LED: Flashes green in operation mode
- 3. USB port

PROGRAMMING

| Selectable Temperature ranges | 0°C to +80°C (when used with SM-PT100-2 up to +245°C) |
|-------------------------------------|---|
| Min and max temperature limit range | -40° C to $+85^{\circ}$ C (when used with SM-PT100-2 up to $+250^{\circ}$ C) |
| Operation modes | Pipe line sensing, Ambient sensing mode |
| | (P.A.S.C. Proportional Ambient Temperature Sensor Control); OFF |

SENSOR

| | Standard | With SM-PT100-2 Module | |
|-------------------------|---|--------------------------------------|--------------------------------------|
| | (included in box) | HARD-78 | MONI-PT100-260/2 |
| Temperature sensor type | NTC 2 KOhm / 25°C, 2-wire | PT100 | PT100 |
| Sensor tip dimensions | Ø5 mm, length 20 mm | Ø6 mm, length 50 mm | Ø6 mm, length 50 mm |
| Sensor cable length | 5 m | 3 m | 2 m |
| Cable extension | Up to 150 m, cross section extension cable: 2 x 1,5 mm ² | Up to 150 m, 3 x 1,5 mm ² | Up to 150 m, 3 x 1,5 mm ² |
| Temperature range | -40°C to +90°C | -40°C to +150°C | -50°C to +260°C |


MONITORING

| Pipe temperature alarm | High temperature alarm | Adjustable range set temperature to 250°C or OFF |
|------------------------|---|--|
| | Low temperature alarm | Adjustable range -40°C to 245°C or OFF |
| Sensor alarm | Sensor open circuit | |
| | Sensor short circuit | |
| Parameter input | Each parameter input and event will be logged | |
| APPROVAL | | |
| Approvals | CE, VDE (pending), ROHS, \ | WEEE |


Complies to EMC: EN 61000-6-3, EN 61000-6-2

Electromagnetic Compatibility (EMC)

Standard: NTC Sensor

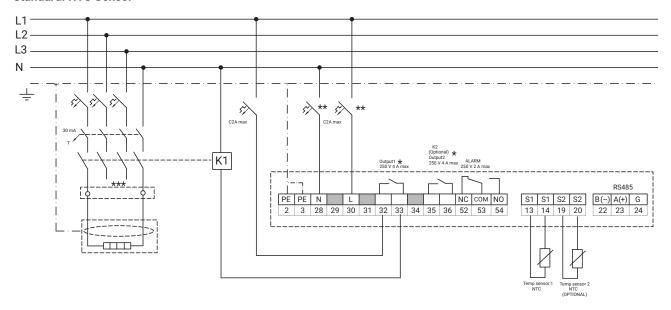

Option: PT100 Sensor

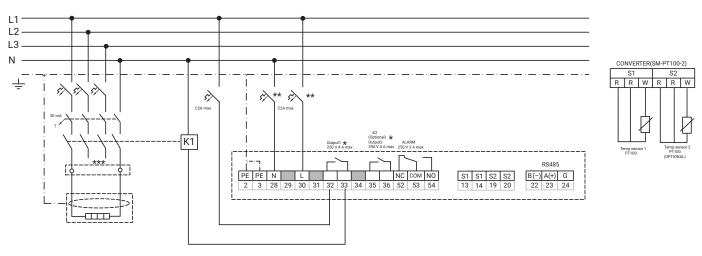

- Output1 and output 2 can be used separately.

 Electrical protection by circuit breaker may be needed for local circumstances, standards and regulations.

 Depending on the application, one or three- pole circuit breakers or contactors maybe used.

COMMUNICATION (Elexant 450c-Modbus)

| Communication port | RS-485 |
|--------------------|--|
| Туре | 2-wire RS-485 |
| Cable | One shielded twisted pair (not included) |
| Length | 1,200 m (4,000 ft.) maximum |
| Quantity | Up to 247 devices per port |
| Data rate | 2400, 4800, 9600, 19200 baud |
| Parity | None, even, odd |
| Stop bits | 1, 2 |
| Protocol | Modbus RTU |

ORDERING DETAILS

| Catalog description | ELEXANT 450c | ELEXANT 450c-Modbus |
|---------------------|--|--|
| Part number | 1244-021970 | 1244-022623 |
| EAN code | 5414506021356 | 5414506022667 |
| Weight | 550 g | 550 g |
| In package | 1 control unit Din rail, 1 line sensor 5 m | 1 control unit DIN rail, 1 line sensor 5 m |

Accessories

| Product description | PCN number |
|--|-------------|
| SENSOR-NTC-10M (-40°C +90°C) | 1244-015847 |
| Sensor Module for PT 100 (up to +250°C) SM-PT100-2 | 1244-022442 |
| PT-100 Sensor HARD-78 (-40°C +150°C) | 213430-000 |
| PT-100 Sensor MONI-PT100-260/2 (-50°C +260°C) | 1244-006615 |
| GM-TA-AS NTC-Sensor / Ambient sensor in enclosure | 1244-017965 |
| nVent RAYCHEM PB-POWERBANK | 1244-020365 |

Important: The nVent RAYCHEM Elexant 450c / Elexant 450c-Modbus controller is for use with the nVent RAYCHEM heating cables only. The warranty and system listing will be invalidated if the Elexant 450c / Elexant 450c-Modbus controller is used with other heating cables.










CONNECT AND PROTECT

Remote monitoring module for Digital Inputs

PRODUCT OVERVIEW

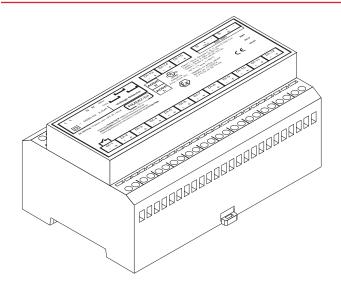

The Remote Monitoring Module for Digital Inputs (nVent RAYCHEM RMM2-DI) provides the capability for the nVent RAYCHEM NGC controller family to read the status of devices remotely and can link them back to the electrical heat-tracing circuits.

The RMM2-DI has in total 15 digital inputs. Multiple RMM2-DI units can communicate with a single User Interface providing centralized monitoring capabilities.

Control and monitoring

A nVent RAYCHEM NGC network controls up to 260 heat-tracing circuits per system based on ambient or pipe temperatures. The RMM2-DI module can be used to collect circuit breaker status, contactor status or other digital information in the field. This information will be communicated back to a central location via one communication cable, reducing installation and wiring cost.

Circuit breaker trip alarms

When monitoring the circuit breaker status with the RMM2-DI module, the information can be linked in the NGC control system to the associated electrical heat-tracing circuits. An alarm will be generated when a circuit breaker trips. As a result the User Interface will show in detail which circuit breaker tripped and the associated electrical heat-tracing circuit(s) effected. The alarms may be reported remotely through an alarm relay in the User Interface, via nVent RAYCHEM Supervisor and upstream to a Process Control system via a Modbus communication link.

Configurations


The RMM2-DI is an electronic device that clips to a DIN 35 rail. The complete kit for ordinary and hazardous areas (Zone 2) include an RMM2 mounted in a rugged polyester enclosure with appropriate terminals and cable glands. For other installation options, contact nVent.










Dimensions (mm) and mounting

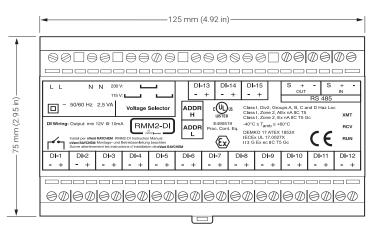



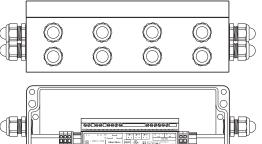

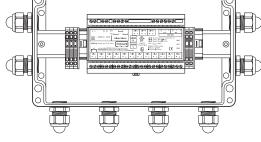

| Dimensions | 125 mm x 75 mm x 60 mm, see drawing | |
|------------|-------------------------------------|--|
| Mounting | DIN rail mountable | |

Technical details

| Ambient operating temperature range | -40°C to +60°C |
|-------------------------------------|--|
| Ambient storage temperature range | -51°C to +60°C |
| Relative humidity | Max. 95%, noncondensing |
| Supply voltage | (nominal) 115/230 Vac +10% -10% 50/60 Hz (jumper selectable) |

RMM2-DI-EX-E enclosure

| Tyna | 2 wire digital input |
|-------------------|--|
| Digital input | |
| Dimensions | 360 mm x 160 mm x 91 mm |
| RMM2-DI-15GL-E | RMM2-DI enclosure with 15 Glands for Digital input signals |
| Dimensions | 260 mm x 160 mm x 91 mm |
| RMM2-DI-8GL-EXE-E | RMM2-DI enclosure with 8 Glands for Digital input signals |
| | DAMAO DI sus de suma unitale O Olemada fem Distribuliano de sinus de |

| Type | 2 wire digital input |
|-------------------|---|
| Supplied power | Minimum power per DI connection supplied by RMM2-DI module 12 V 10 mA (Sink/source) |
| Number of signals | 15 Digital inputs |



Communication to nVent RAYCHEM NGC control system

| Туре | RS485 | |
|----------------|---|--|
| Protocol | Modbus RTU | |
| Cable type | Shielded twisted pair | |
| Length cable | 1200 m max. | |
| Address switch | Selectable on RMM2-DI, address range: 1-255 | |

Connection terminals

| Supply (in-out) | 4 terminals for cables 0.2 mm ² to 4 mm ² |
|------------------|---|
| RS485 connection | 2 x 3 terminals for cables 0.2 mm ² to 2.5 mm ² |
| DI connections | 15 x 2 terminals for cables 0.2 mm² to 2.5 mm² |

APPROVALS

RMM2-DI module

For use in ordinary area.

For use in hazardous area (when mounted in Ex-d enclosure. RMM-DI panel mount, safe area)

Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust) Class 1 Div 2 and Class I Zone 2

RMM2-DI-8GL-EX-E and RMM2-DI-15GL-EX-E System

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas),

Temperature classification

Product certification

RMM2-DI module:









RMM2-DI-8GL-EX-E and RMM2-DI-15GL-EX-E system











For certifications in other regions (FM, CSA, IEX, UL, etc.), please refer to the installation manual.

More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION


| Additional Details | Part Description | Part Number | Weight | EAN Number |
|--|-------------------|-------------|--------|---------------|
| RMM2-DI, no enclosure | RMM2-DI | 1244-018083 | 0.3 kg | 5414506018479 |
| With Zone 2 enclosure and 8 Glands for DI signals | RMM2-DI-8GL-EX-E | 1244-018858 | 1.9 kg | 7350027271611 |
| With Zone 2 enclosure and 15 Glands for DI signals | RMM2-DI-15GL-EX-E | 1244-018859 | 2.0 kg | 7350027271628 |



CONNECT AND PROTECT

Heat-tracing remote monitoring module (Ex)

PRODUCT OVERVIEW

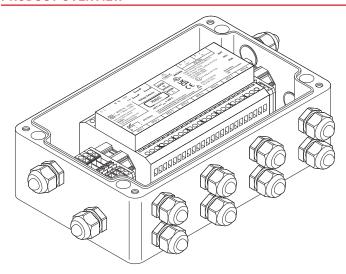

The Remote Monitoring Modules (RMM3) provide temperature monitoring capability for the nVent RAYCHEM Elexant and NGC controller family. The RMM3 accepts inputs from up to eight PT 100 temperature sensors that measure pipe or ambient temperatures in a heat-tracing system. Multiple RMM3 units communicate with a single nVent RAYCHEM User Interface providing centralised monitoring of temperatures.

A single, twisted pair RS-485 cable connects up to 247 RMM3 modules in the field.

Control and monitoring

A nVent RAYCHEM control network can consist of many heat-tracing circuits based on ambient and/or pipe temperatures. The RMM3 may be used to collect both ambient and pipe temperatures for control or for extensive monitoring of the heat-tracing system. The RMM3 units are placed near desired monitoring locations, even in hazardous areas (Zone 2). Multiple temperature sensor inputs are networked over a single cable, significantly reducing installation cost for temperature monitoring.

Alarms

Low and high temperature alarms may be set for sensors connected to the nVent RAYCHEM controllers via the RMM3. Alarm limits are set and alarm conditions are reported to the user. Additional alarms are triggered for failed temperature sensors and communication errors. Alarms may be reported remotely through the Modbus communication to the process control system, via an alarm relay in the User Interface or via nVent RAYCHEM Supervisor.

Configurations

The RMM3 is an electronic device that clips to a DIN rail. The unit is available as 230/115 Vac version and 24 Vdc version. The complete kit for ordinary and hazardous areas (Zone 2) includes an RMM3 mounted in a rugged polyester enclosure with appropriate terminals and cable glands. For other installation options, contact nVent.






Control & Monitoring




Dimensions (in mm)

RMM3 module

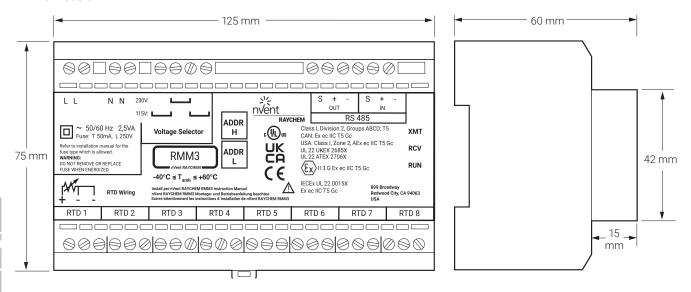

Hazardous area enclosure

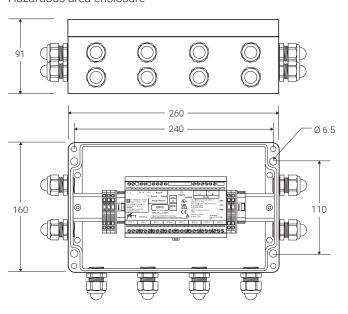

Technical details

| Ambient operating temperature range | -40°C to +60°C |
|-------------------------------------|--|
| Ambient storage temperature range | −51°C to +60°C |
| Relative humidity | max. 95%, noncondensing |
| RMM3 supply voltage (nominal) | 115/230 Vac +10% -10% 50/60 Hz (jumper selectable) |
| RMM3-24Vdc supply voltage (nominal) | 24 Vdc (10-30 Vdc) |
| Internal power consumption | 2.5 VA |
| | |

| RMM3 Hazardous Area Enclosure | nVent RAYCHEM RMM3-EX-E and RMM3-24VDC-EX-E |
|-------------------------------|--|
| Protection | IP66 |
| Base and lid | Material: glassfibre-reinforced polyester, lid seal: silicone |
| Colour | Black |
| Ambient temperature range | -40°C to +60°C |
| Lid fixing | 4 x M6, cheese-head, captive, stainless steel |
| Entries | 12 x M20 for cable diameters ranging from 6 to 12 mm |
| Glands provided (Ex e) | 12 x M20 with integral stopping plugs |
| Mounting | Surface mounting with 4 fixing holes on 240 x 110 mm centres hole diameter: 5 mm |

| | | | en | |
|--|--|--|----|--|
| | | | | |
| | | | | |
| | | | | |

| Area of use | Use sensors with the appropriate approvals required for the area of use |
|--------------------------|---|
| Quantity to be connected | Up to 8 PT 100 per RMM3 The sensor cable may be extended with a 3 (+PE)-wire signal cable adding 20 Ohms lead resistance maximum. When using 1.5 mm² cable this equals to ±150 m of cable. When the sensor cable is laid in cable ducts or in the vicinity of high voltage carrying cables the sensor extension cable should be shielded. The shield of the extension cable should be grounded at one end only. |
| Type | 3 wire PT 100, temperature coefficient per IEC /51-1983 |

Communication

| o o i i i i i i i i i i i i i i i i i i | |
|---|---|
| Туре | RS-485 |
| Cable | 1 shielded twisted pair |
| Length | 1200 m max. |
| Quantity | By Modbus standards limited up to 247 units, maximum number of units defined by control network. See installation manual of control systems for more details. |
| Address | Switch-selectable on RMM3 |
| Communication | Modbus RTU, modbus settings can be modified (baud rate, bits, parity, stop bits, tx delay) |
| | |

Connection terminals

| Supply (in-out) | 4 terminals for cables 0.2 mm ² to 4 mm ² |
|--------------------|---|
| Earth | 10 terminals for cables up to 4 mm ² aside the RMM3 unit |
| PT 100 connections | 8 x 3 terminals for cables 0.2 mm ² to 2.5 mm ² |
| RS-485 connection | 2 x 3 terminals for cables 0.2 mm ² to 2.5 mm ² |

Electromagnetic compatibility

| Immunity | Complies with EN 50 082-2 (heavy industrial) |
|-----------|--|
| Emissions | Complies with EN 50 081-1 (light industrial) |

APPROVALS

For use in ordinary and hazardous area Zone 2 (Gas)

Temperature classification

Т6

Product certification





More details about product certification, approvals and conditions of safe use are available in the installation manual at nVent.com/RAYCHEM.

nVent.com/RAYCHEM | 221



ORDERING DETAILS

| RMM3 | Part Descriptions | Product Number | Weight |
|--|-------------------|----------------|--------|
| 115 VAC/230 VAC No enclosure, internal electronics module only | RMM3 | 1244-022749 | 1.2 kg |
| 115 VAC/230 VAC version with hazardous area enclosure | RMM3-EX-E | 1244-022750 | 3.2 kg |
| 24 VDC version, no enclosure, electronics module only | RMM3-24VDC | 1244-022782 | 1.2 kg |
| 24 VDC version with hazardous area enclosure | RMM3-24VDC-EX-E | 1244-022783 | 3.2 kg |

| Pipe Temperature Sensors (PT 100) | | | |
|--|----------------|------------|--------|
| PT 100 temperature sensor for Zone 1 | MONI-PT100-EXE | 967094-000 | 0.6 kg |
| PT 100 temperature sensor for ordinary areas | MONI-PT100-NH | 140910-000 | 0.2 kg |








CONNECT AND PROTECT

Heat-tracing remote module for control

PRODUCT OVERVIEW

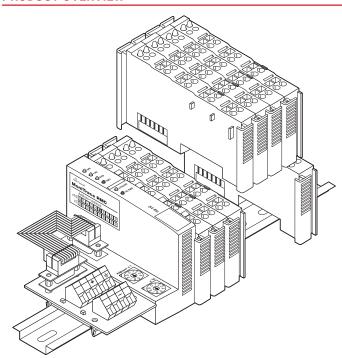

nVent RAYCHEM remote modules for control (RMC) provide multiple relay outputs for switching heating cable circuits controlled by the nVent RAYCHEM NGC User Interface Terminal (NGC-UIT). RMC units are modular and may be configured with 2 to 40 relay outputs. A single nVent RAYCHEM NGC-30-UIT can communicate with up to 10 RMC via a single, twisted pair RS-485 cable to provide distributed control of up to 260 heating cable circuits.

Control and monitoring

The nVent RAYCHEM NGC-30 controls and monitors multiple heat-tracing circuits based on pipe or ambient temperatures. These temperatures can collected locally by nVent RAYCHEM remote monitoring modules (RMM2) connected on the same RS-485 network. Based on temperature inputs from the RMM2, the nVent RAYCHEM NGC-UIT determines which heating cable circuits are to be energised and sends this information to RMC, which then turn on or off the heating cable power contactors. Because temperature inputs and control outputs are located near equipment to be sensed or controlled, wiring costs are reduced significantly.






Alarm inputs

Each RMC unit includes two inputs to monitor the status of circuit breakers or power contactors. For example, one input may be used for a common circuit breaker trip alarm, providing an alarm indication at the nVent RAYCHEM NGC-UIT if any circuits fail due to earth fault or overcurrent events. Alarms may be reported remotely through an alarm relay in the nVent RAYCHEM NGC-UIT or through an RS-485 connection to nVent RAYCHEM Supervisor. Up to 20 MONI-RMC-2DI 2 channel digital input moduls can be added if required.

Configurations


The RMC are modular, electronic devices that mount on a DIN 35 rail. RMC units must be installed in panels or enclosures suitable for the area classification and environment. For each RMC installation, purchase one MONI-RMC-BASE kit, which includes the network processor, digital inputs, and end terminator; one MONI-RMC-PS24 24-Vdc power supply; and up to 16 MONI-RMC-2RO 2-channel relay output modules, as required.



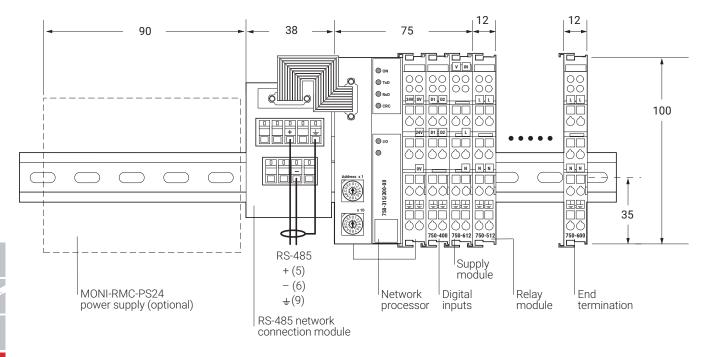

PRODUCT SPECIFICATIONS

Dimensions (in mm)

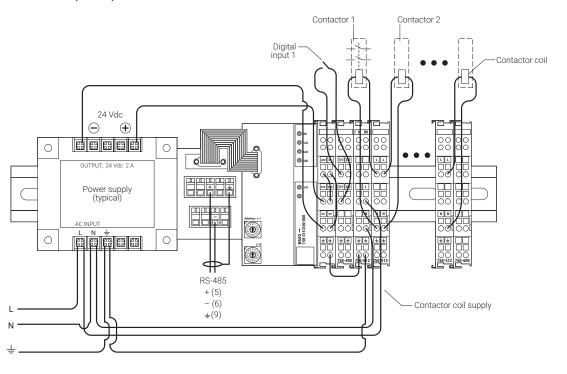

Technical details

| Ambient operating temperature range | 0°C to 55°C |
|-------------------------------------|-------------------------|
| Ambient storage temperature range | −40°C to 70°C |
| Relative humidity | Max. 95%, noncondensing |
| Protection | IP2X per IEC 529 |
| Supply voltage | 24 Vdc |
| Supply current | < 2 A |

Relay outputs

| Quantity per RMC | 1 to 20 two-channel modules (2 to 40 relay outputs) |
|------------------------------|---|
| Total relay outputs via RMCs | 260 |
| Type | Mechanical, normally open, non-floating |
| Voltage, maximum | 250 Vac, 30 Vdc |
| Current, maximum | AC/DC 2 A |
| Maximum power | 60 W/500 VA (resistive) |
| Isolation | 4 kV |
| Life (operations) | 1 x 10 ⁶ at 0.35 A to 0.2 x 10 ⁶ at 2 A |
| Connection terminals | 0.08 mm ² –2.5 mm ² , Spring-type |
| | |

Supply module

| Voltage | 230 Vac/dc |
|----------------------|---|
| Current | 10 A |
| Connection terminals | Spring-type for cables from 0.08 mm ² to 2.5 mm ² |

Digital inputs

| Quantity per RMC | Up to 20 two-channel modules (2 to 40 digital inputs) |
|----------------------|---|
| Туре | Solid-state, 24 Vdc source |
| Current consumption | 5 mA |
| Isolation | 500 V |
| Connection terminals | 0.08 mm ² -2.5 mm ² (Spring-type) |

Communication to nVent RAYCHEM NGC-UIT

| Type | RS-485 |
|----------------------|---|
| Connection terminals | 0.08 mm² to 2.5 mm² (Spring-type) |
| Cable | 1 shielded twisted pair |
| Length | 1200 m max. |
| Quantity | Up to 247 RMC may be connected to one nVent RAYCHEM NGC-UIT |
| Address | Switch-selectable on RMC, 10 addresses, 1-99 |

APPROVALS

For use in ordinary area.

Product certification



nVent.com/RAYCHEM | 225

ORDERING INFORMATION

| | Part Description | Product Number | Weight |
|-------------------------------------|------------------|----------------|---------|
| Remote module for control (RMC) | | | |
| Base unit* | MONI-RMC-BASE | 309735-000 | 0.5 kg |
| Two-channel relay output module** | MONI-RMC-2RO | 920455-000 | 0.05 kg |
| Two-channel digital input module*** | MONI-RMC-2DI | 062367-000 | 0.05 kg |
| 24 Vdc power supply | MONI-RMC-PS24 | 972049-000 | 0.7 kg |

- Purchase one base for each RMC installation. Includes network processor, two digital inputs, end termination, and RS-485 connection module with ribbon cable.
- ** Purchase one module for each set of two relay outputs required. Minimum of one module (2 relay outputs), maximum of 20 (40 relay outputs) per RMC base.
- *** Purchase one module for each set of two digital inputs required. Minimum of one module (2 digital inputs), maximum of 20 (40 digital inputs) per RMC base. Additional module for each pair of digital inputs required. One MONI-RMC-2DI module is included in each MONI-RMC-BASE unit

Control & Monitoring

Ecom Tab-Ex 03



CONNECT AND PROTECT

Configuration and Monitoring Assistant

PRODUCT OVERVIEW



The Ecom Tab-Ex 03 is an easy-to-use wireless tablet for configuration and monitoring of nVent RAYCHEM NGC-20 and Elexant 5010i field controllers. The tablet has an intuitive user interface eliminating the need for extensive training. The tablet is available in two versions: For Zone 2 (Zone 22) use the Tab-EX 03 DZ2. For Zone 1 (Zone 21) use the Tab-Ex 03 DZ1.

Hardware design

The devices are designed for high productivity in an industrial environment. They are protected against humidity, dust, corrosion and extreme ambient temperatures. The tablet has an 8" TFT display.

Software

The application on the tablet is designed to provide full configuration and monitoring capabilities of the controllers. The tablets allow wireless connectivity via Bluetooth® to any nVent RAYCHEM NGC-20 and Elexant 5010i control unit within range. The devices are based on Samsung technology and are running Android operating system.

DRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS | | | | |
|--------------------------|--|--|--|--|
| General | Ecom Tab-EX 03 DZ2 | Ecom Tab-EX 03 DZ1 | | |
| Typical use | | The tablets are used for the configuration and monitoring of nVent RAYCHEM NGC-20 and Elexant 5010i heat-tracing controllers | | |
| Environmental protection | IP64 to EN/IEC 60079-0 | IP64 according to EN/IEC 60079-0 | | |
| Compatible control units | nVent RAYCHEM NGC-20-C-E, NGC-20-Cl | -E, Elexant 5010i and Elexant 5010i-LIM | | |
| Operating temperature | -20°C to +55°C | −20°C to +53°C | | |
| Dimensions | 126.8 x 213.8 x 9.9 mm (incl. protective case) | 161.5 mm x 262.75 mm x 25.75 mm | | |
| Connectivity | Bluetooth, WiFi and USB connector | Bluetooth, WiFi and USB connector | | |
| Operating system | Android O.S. 11 | Android O.S. 13 | | |
| Processor | Exynos 9810 (Lhotse) Octa-Core 64-Bit; 4 x 2.7 GHz, 4 x 1.7 GHz | Octa-core, 4 x 2.7 GHz + 4 x 1.7 GHz Exynos 9810 | | |
| Bluetooth interface | Bluetooth V5.0 | Bluetooth 5.0 | | |
| Memory | RAM 4 GB, ROM 64 GB with microSD up to 512 GB | RAM 4GB, ROM 64 GB with microSD up to 1024 GB, 512 GB installed | | |
| Wireless LNA | WiFi 802.11 a/b/g/n/ac/ax (2.4 GHz + 5 GHz) | 802.11 a/b/g/n/AC/ax 2.4 G+5 GHz, HE80, MIMO, 1024 QAM | | |
| Display | 8" TFT with 1920 x 1200 pixels | 8" TFT with 1920 x 1200 (WUXGA) | | |

| General | Ecom Tab-EX 03 DZ2 | Ecom Tab-EX 03 DZ1 |
|---------------------|----------------------------------|----------------------------------|
| Charger | EU compatible | EU compatible |
| Software (included) | General Android apps | General Android apps |
| Keyboards & buttons | Touchscreen, buttons on the side | Touchscreen, buttons on the side |
| Captive pen | Included | Included |

APPROVALS

Ecom Tab-EX 03 DZ2 Ecom Tab-EX 03 DZ1

For use in ordinary and hazardous area For use in ordinary and hazardous area Zone 2 (Gas) and Zone 22 (Dust) Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Product certification















More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM

ORDERING INFORMATION

| | Ecom Tab-EX 03 DZ2 | Ecom Tab-EX 03 DZ1 |
|-------------|--------------------|--------------------|
| Part number | 1244-022743 | 1244-022837 |
| Weight | 610 g | 1100 g |







Control & Monitoring

Supervisor



CONNECT AND PROTECT

Heat-tracing controller configuration and monitoring software

PRODUCT OVERVIEW

The nVent RAYCHEM Supervisor heat-tracing controller configuration and monitoring software provides a graphical user interface for nVent RAYCHEM heat-tracing communication and controller products. Heat-trace system information can be accessed and managed from almost anywhere in the world, making Supervisor a powerful management tool for the entire Heat Management System (HMS).

Network and connectivity

By using the latest network technologies, costs can be reduced. Devices are no longer limited to simple hard-wired serial communications, but take advantage of existing network infrastructures including Ethernet LANs (Local Area Networks) and Internet-based WANs (Wide Area Networks).


Scalability

nVent RAYCHEM Supervisor is available in two Editions – 'Standard' and 'Enterprise'.

PRODUCT SPECIFICATIONS

Supervisor STANDARD edition

The standard edition is a single-server multi-user version. It provides connectivity to several hundred control units in the field and can support up to four simultaneous users.

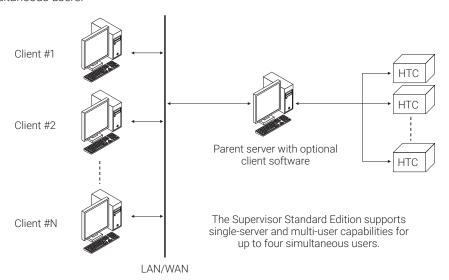








Supervisor ENTERPRISE edition

The 'Enterprise' edition offers unlimited multi-user, multi-server network capabilities, expanding on the capabilities of the 'Standard' edition. Enterprise level functionality requires the purchase of SQL server software and Microsoft Licensing.

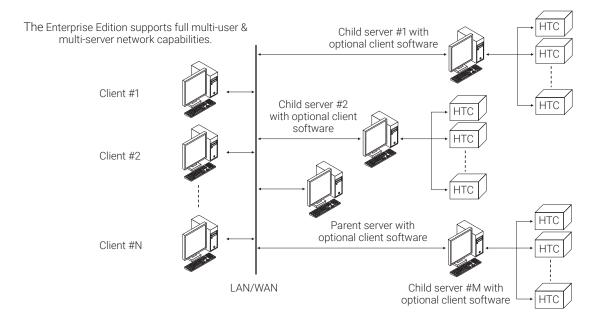



| Device configuration | Individual devices can be configured in either offline or online mode. After confirmation, data will be uploaded into heat-tracing control devices. |
|--|--|
| Online monitoring | Monitoring online signals like temperature, ground-fault current, current, voltage of individual controllers or sets of controllers in user-defined groups. |
| Trending & historical data storage | User defined trending of heat-tracing data which can be stored into the database on a user-defined time interval and storage mechanism. |
| Alarm and events | Displayed in a separate pop-up banner where they can be individually acknowledged by the user. All alarms and events are stored in the database for post-event analyses. |
| Plant reference model | Organize Heat-tracing circuits via a model which represents the layout of the plant, simplifying the process of locating heat trace circuits for the entire system. |
| Enhanced documentation link to device configuration & monitoring utilities | Link heat-tracing circuits to design and construction documentation and makes it easily accessible to the user (examples: P&IDs, heat-tracing isometrics). |
| Data import & export | Export system devices and plant documentation, and save the data in an XML-format file which can also be imported. |
| Reports | Numerous pre-defined reports like device configurations, alarms and events (historical and current), user roles, etc. |
| Batch, recipes and event scheduler | Multiple pre-defined heat-trace setting changes can be executed at the same time by using the batch and recipe tool. Batches can be launched manually or automatic at a scheduled date and time or at regular intervals. |
| System wide data synchronisation | Synchronise continuously with the controllers in the field. Local changes in the controller will reflect in Supervisor and vice versa. |
| E-mail on alarm notification | Send email notifications to selected users when alarms occur. |
| Internal user messaging | Instantaneous communication between Supervisor clients connected to the same Supervisor network. |
| Multi level security and individual user defined preferences | Security is based on plant groups, users, and roles, which offers differentiation between each end-user responsibility, rights and preferences. |
| Languages | English, French, German, Russian, Chinese |
| | |

Controller compatibility

Supervisor is compatible with any of the following nVent RAYCHEM communication and controller products that have the appropriate communications interface installed:

- · Elexant 4000 series
- NGC-20
- · Elexant 5010i
- NGC-30
- · NGC-40 series
- · HTC-900 series
- MoniTrace RMC
- · NGC-UIT's
- Legacy devices (T2000 systems, GCC-9000/780, 720, 790, HTC-9000/9100/CAS HTC's)

System requirements Parent server computer A Quad core® – 2.0 GHz CPU For large systems, where multiple Child Servers are to be used, consider the use of higher speed CPU's with more processing cores and / or processing threads within the Parent Server computer for greater performance. Consult nVent Applications Engineering for guidance 4 gigabytes of free disk space (HDD or SSD) · 8 gigabytes of RAM · Field Device connectivity, such as Ethernet or Serial RS-485 (type and quantity depend on device communication architecture) · A mouse or other compatible pointing device • A display with minimum 800x600 resolution · Standard configurations using Microsoft SQL Express: Windows 7, Windows 8 or Windows 10, either 32 or 64 bit. Multi-User/Multi-Server Capable configurations using MS SQL Server: Microsoft Windows® Server 2012 through 2019, and Windows 7, 8, or 10 either 32 or 64 bit • Microsoft .NET® Framework version 4.0 · Network connectivity Child server computer(s) (optional) · A Quad core© - 2.0 GHz CPU 4 gigabyte of free disk space (HDD or SSD) · 8 gigabytes of RAM · Field Device connectivity, such as Ethernet or Serial RS-485 (type and quantity depend on device communication architecture) • A mouse or other compatible pointing device A display with a minimum 800x600 resolution · Microsoft Windows 7, 8 or 10 • Microsoft .NET® Framework version 4.0 · Network connectivity Client computer(s) · A Quad core© - 2.0 GHz CPU • 2 gigabytes of free space (HDD or SSD) · 4 gigabytes of RAM • A mouse or other compatible pointing device • A display with a minimum 800x600 resolution · Windows 7, Windows 8 or Windows 10 either 32 or 64 bit Microsoft .NET® Framework version 4.0 · Network connectivity nVent RAYCHEM Supervisor · Supervisor Standard edition runs on SQL Express Database (Edition dependent) · Supervisor Enterprise edition requires SQL Server

Registration

Supervisor will run in TRIAL mode for up to 14 days.

For more information about how to register within this period, see the Supervisor Installation and Operating Instructions or visit nVent.com.

Communication

Modbus RTU protocol via:

- TCP/IP
- RS-232
- RS-485

Control & Monitoring


MONI-PT100-NH



CONNECT AND PROTECT

Temperature sensor for ordinary area

PRODUCT OVERVIEW

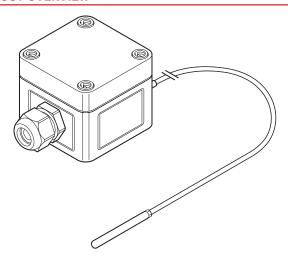

2 wire nVent RAYCHEM PT 100 sensor with glass fiber reinforced polycarbonate junction box for installation in ordinary area.

PRODUCT SPECIFICATIONS

| ensor |
|-------|
| ensoi |

| Type | PT100 (2 wire) DIN IEC 751, Class B |
|-----------------------------------|--|
| Material | Tip: stainless steel Extension cable: silicone |
| Temperature measuring range | -50°C to +180°C |
| Temperature range extension cable | -50°C to +180°C (+215°C maximum 1000 hrs), max. exposure temp. tip: +400°C |
| Length | 2 m |
| Diameter | Extension cable ca 4.6 mm, tip ca 6.0 mm |
| Minimum bending radius | Extension cable: 5 mm, the measuring tip should not be bent |

Enclosure

| Liiciosule | |
|-----------------------------|--|
| Ingress protection | IP66 |
| Material | Glass fiber reinforced polycarbonate (gray) |
| Dimensions | Width = 65 mm Height = 65 mm Depth = 57 mm |
| Cable gland | M20 (polyamide) suitable for cable diameters ranging from 10 mm to 14 mm |
| Operating temperature | -30°C to +80°C |
| Lid sealing gasket material | CFC-free Polyurethane |
| Cover screws | Plastic |
| Mounting | For pipe mount use JB-SB-26 wall mount surface mount via moulded holes at 50 x 50 mm |

nVent.com/RAYCHEM | 233



Installation and connection

| Terminals | 3 front entry spring-type terminals (terminals 2 and 3 are bridged) |
|-----------------|---|
| Terminal sizing | Terminals suitable for cables from 0.15 mm to 2.5 mm ² |

APPROVALS

For use in ordinary area

Product certification



ORDERING INFORMATION

| Part Description | MONI-PT100-NH |
|------------------|----------------------|
| PN (Weight) | 140910-000 (0.22 kg) |








MONI-PT100-EXE

CONNECT AND PROTECT

RAYCHEM

Temperature sensor for hazardous areas 8

PRODUCT OVERVIEW

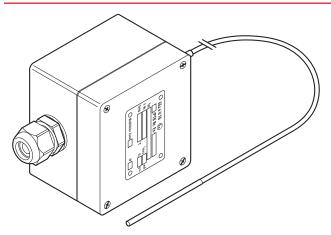

3 wire nVent RAYCHEM Pt 100 sensor connected to a black glass fiber reinforced polyester junction box with 4 front entry spring-type terminals.

Hazardous area cable gland, pre-installed (M20, black).

PRODUCT SPECIFICATIONS

| TROPOGLET CONTOUND | |
|-----------------------------|--|
| Sensor | |
| Туре | Pt 100 (3 wire) DIN IEC 751, Class B. |
| Material | Extension cable and tip both stainless steel (MI) |
| Temperature measuring range | -100°C to +500°C |
| Maximum exposure temp. tip | +585°C |
| Length | 2 m |
| Diameter | ca 3 mm |
| Minimum bending radius | Extension cable: 20 mm, the measuring tip should not be bent |
| Enclosure | |
| Material | Glass fiber reinforced polyester (black) |
| Ingress protection | IP66 |
| Dimensions | Width = 80 mm Height = 75 mm Depth = 55 mm |
| Cable entry | M20 gland suitable for cable diameters ranging from 10 mm to 14 mm |
| Operating temperature | -50°C to +60°C |
| Sealing gasket material | Tongue and groove system with silicone seal |
| Cover screws | Stainless steel M4 threaded |
| Mounting | For pipe mount use JB-SB-26 wall mount surface mount via moulded holes at 68 x 45 mm |
| Installation and connection | |
| Terminals | 4 front entry spring-type terminals |
| Terminal sizing | Suitable for cables from 0.5 mm² to 2.5 mm² |
| | |



Temperature classification

Т6

Product certification













More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM

ORDERING INFORMATION

Part Description nVent RAYCHEM MONI-PT100-EXE

PN (Weight) 967094-00 (0.44 kg)










MONI-PT100-EXE-Sensor



CONNECT AND PROTECT

Temperature sensor for hazardous area (without Junction box) &

PRODUCT OVERVIEW



Mineral Insulated temperature sensor with M16 brass gland, installed on the sensor lead. Both are approved for use in hazardous area. (Sealing washer, locknut and earth tag are included)

PRODUCT SPECIFICATIONS

| Sensor |
|--------|
|--------|

| Туре | Pt 100 (3 wire) |
|------------------------------|--|
| | DIN IEC 751, Class B |
| Material | Stainless steel (MI) |
| Temperature measuring range | −100°C to +500°C |
| Maximum exposure temperature | +585°C |
| Length | 2 m |
| Diameter | ca 3 mm |
| Minimum bending radius | Extension cable: 20 mm, the measuring tip should not be bent |
| | |

Installation and Connection

M16 (Brass) compression gland pre-installed on the sensor.

Sealing washer, earth tag and locknut included.

Maximum operating temperature (for the gland) -50°C to +60°C

APPROVALS

For use in hazardous area

Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature Classification

Т6

Product certification











More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.








MONI-PT100-EXE-AMB

CONNECT AND PROTECT

Ambient sensing temperature sensor for hazardous area (PT100) 🖘

PRODUCT OVERVIEW



nVent RAYCHEM MONI-PT100-EXE-AMB is a PT100 temperature sensor connected to a glass fiber reinforced junction box, equipped with a preinstalled M20 gland. The unit is approved for hazardous areas.

The metal tube around the sensor gives mechanical protection and prevents the sensor for sudden temperature changes like by direct sunlight and/or wind.

PRODUCT SPECIFICATIONS

| Sensor | |
|-----------------------------|---|
| Туре | PT100 (3-Wire) acc. DIN IEC 751, Class B |
| Material | Sensor: stainless steel (MI) Protection tube: brass |
| Temperature measuring range | Assembly -50°C to +60°C (Sensor measuring range from -100°C to +500°C) |
| Enclosure | |
| Material | Glass fiber reinforced box (Black) M4 captive stainless steel cover screws. |
| Ingress protection | IP66 |
| Dimensions | Box: Width = 80 mm Height = 75 mm Depth = 55 mm Installed: Width = \sim 110 mm Height = \sim 200 mm |
| Cable entry | M20 suitable for cable diameters ranging from 10 mm to 14 mm |
| Operating temperature | −50°C to +60°C |
| Mounting | Surface mount via molded holes centered at 68 x 45 mm. Any installation position is allowed. |
| Installation and connection | |
| Terminals | 4 front entry cage clamp terminals suitable for cables from 0.5 to 2.5 mm ² |

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification:

T6

Product certification











More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM

ORDERING INFORMATION

| Part number | 1244-004451 |
|-------------|-------------|

RAYCHEM-DS-EU1449-MONIPT100EXEAMB-EN-2401




MONI-PT100-4/20MA



CONNECT AND PROTECT

3 Wire PT 100 sensor with 4 to 20 mA transmitter for hazardous area 🖘

PRODUCT OVERVIEW

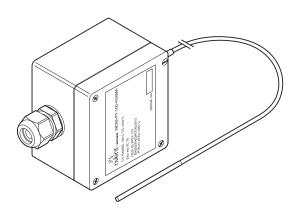

nVent RAYCHEM PT 100 sensor connected to a 4-20 mA transmitter built in a black glass fiber reinforced polyester junction box with M20 cable gland (Blue).

PRODUCT SPECIFICATIONS

| 20 | ne | ۸r |
|----|----|-----|
| SE | пэ | UI. |

| Type | PT 100 (3 wire) |
|------|---------------------|
| | DIN IEC 751 Class B |

DIN IEC /51, Class B.

Material Extension cable and tip both stainless steel (MI).

Temperature measuring range: -50°C to +250°C (transmitter)

Maximum exposure temp. tip +585°C Length 2 m Diameter ca 3 mm

Minimum bending radius Extension cable: 20 mm, the measuring tip should not be bent

Enclosure

| Ingress protection IP66 | |
|-------------------------|--|
|-------------------------|--|

Material Glass fiber reinforced polyester (black)

Dimensions Width = 80 mm Height = 75 mm Depth = 55 mm

Cable gland M20, blue (EEx e) suitable for cable diameters ranging from 10 mm to 14 mm

Operating temperature -20°C to +55°C

Sealing gasket material Tongue and groove system with silicone seal

Cover screws Stainless steel M4 threaded

JB-SB-26 For pipe mounting use

Installation and connection

| Terminals | 2 screw terminals |
|-----------|-------------------|

Terminal sizing Suitable for cables from 0.5 mm² to 1.5 mm² For use in hazardous area Zone 1 (Gas)

Temperature classification

T6...T4

Product certification









More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

| Part Description | MONI-PT100-4/20MA |
|------------------|----------------------|
| PN (Weight) | 704058-000 (0.46 kg) |














MONI-PT100-260/2



CONNECT AND PROTECT

Temperature sensor with M16 gland

PRODUCT OVERVIEW

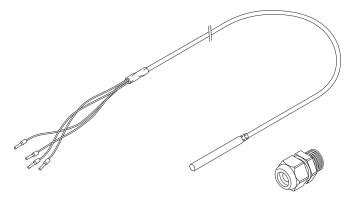

nVent RAYCHEM MONI-PT100-260/2 temperature sensor is designed for providing accurate temperature measurements.

The MONI-PT100-260/2 sensor exhibits excellent mechanical, electrical and thermal properties what makes the sensor extremely useful for a broad range of applications. The sensor can be connected to the control device using 3-wire technology for providing highest accuracy and measuring stability.

PRODUCT SPECIFICATIONS

| Sensor | |
|----------------------------|--|
| Туре | Pt 100 (3 wire) DIN IEC 751, Class B |
| Jacket/Sheath Material | Extension cable PTFE (Fluoropolymer) Measuring tip stainless steel (316 Ti) |
| Cable construction | Braided |
| Measuring range | -50°C to +260°C |
| Maximum exposure temp. tip | 400°C |
| Length | Total sensor length 2 m (other lengths are available on request) Length of the measuring tip ca 50 mm |
| Nominal Diameter (OD) | Diameter of the sensor cable 4.8 mm |
| | Diameter of the tip 6 mm. |
| Conductors | $4 \times 0.5 \text{ mm}^2$ (Red, Red, White and braid) PTFE insulated |
| Minimum bending radius | Sensor cable minimum 20 mm, the measuring tip should not be bent |
| Cable gland | |
| Thread size (color) | M16 (Black) |
| Material | Polyamide (PA) Halogen-free |
| Temperature range | -40°C to +75°C |
| Cable acceptance size | Suitable for cables from 4 to 9 mm diameter |

For use in ordinary area.

For hazardous area only use in combination with Is barriers.

Cable gland: for use in ordinary and potentially hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

Temperature classification

Temperature classification is defined by the complete system.

Product certification





More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

ORDERING INFORMATION

PN 1244-006615









Control & Monitoring








NGC-40 Safe Area Panels

CONNECT AND PROTECT

Control, monitoring and power distribution panels

PRODUCT OVERVIEW

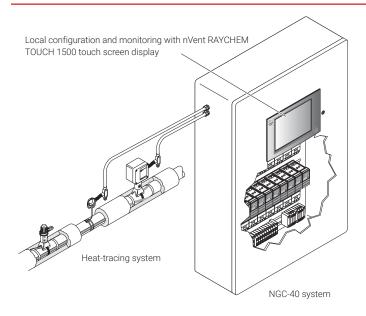

nVent RAYCHEM distribution panels are specially designed to power, control and monitoring electrical heat tracing circuits. The system offers a complete standard set of configurations, serving most heat-tracing applications. The panels vary from power distribution panels up to systems with full control and monitoring capability. The panels are available with a combined incomer or with a separate incomer section.

The power distribution panels with control and monitoring functionality are equipped with the advanced nVent RAYCHEM control and monitoring systems like the nVent RAYCHEM NGC-40. Multiple panels can be combined and optionally supervised by means of the nVent RAYCHEM TOUCH 1500 interface.

Standard panel advantages

Standard control, monitoring and power distribution panels have the following advantages:


- · No surprises or unpredictable cost increases
 - All dimensions and features known during quotation stage so full clarity at the moment of ordering
 - Proven design
- · High Quality:
 - Design optimized for electrical heat-tracing and based on years of experience in the industry
 - Repeatedly build and pre-tested at the panel shop so no need for FAT
- · Optimized scheduling:
 - No need to spend time on detailed panel design
 - Reduced time spend for the client leading to cost reduction
 - Short lead times

Panels are available as:

- Incomer sections: Power Supply System (PSS)
- · Outgoing sections: Power Distribution System (PDS)
- · Combination of incomer and outgoing in one panel enclosure

Control system power distribution panels: nVent RAYCHEM NGC-40

The NGC-40 is a multipoint electronic control and monitoring system with unique single-point controller architecture for heat-tracing used in process temperature maintenance and freeze protection applications. By taking advantage of innovative modular packaging techniques, the NGC-40 system provides configuration and component flexibility so that it may be optimized for specific applications needs. The NGC-40 system consists out of the following components:



Control modules: NGC-40-HTC & NGC-40-HTC3

The NGC-40 system uses a single controller module per heat-tracing circuit for maximum reliability. There are dedicated control modules available for single phase (NGC-40-HTC) and three-phase (NGC-40-HTC3) heat-tracing circuits. The NGC-40 control modules include ground-fault detection and protection while guaranteeing precise single phase and three-phase line current measurements. Up to eight (8) temperature sensors (RTDs) can be used for each heat-tracing circuit allowing a variety of temperature control, monitoring, and alarming configurations. The temperature sensors can be connected via the NGC-40-HTC and -HTC3, NGC-40-IO and the field mounted nVent RAYCHEM RMM2 module. The NGC-40 control modules provides digital inputs as well as alarm outputs that can be used to control an external annunciator. The digital input is programmable and may be used for various functions such as forcing heat-tracing outputs on or off or generating CB trip alarms, making the system more flexible to match each customer's specific needs.



Safety temperature limiter: NGC-40-SLIM

The NGC-40 includes an optional safety temperature limiter module. The module can be used with up to 3 temperature inputs for three phase heat-tracing circuits. The limiter can be associated with a NGC-40 control module and use the heater current information to manage the trip functionality. The front panel of the limiter module has LED indicators, like the other modules, for various status conditions and provides buttons to confirm a new trip setpoint, and reset trip or alarm conditions. The module has one output for the contactor and one output for external alarm annunciation. The safety temperature limiter can also be reset via the digital input, the user interface TOUCH 1500 and Supervisor.



IO module: NGC-40-IO

In addition to hardwiring an RTD directly into a Heat Trace Control module, RTDs can be wired to Input/Output modules (NGC-40-IO) within the panel and assigned to heattracing circuits through software. This means that a NGC-40 system can be optimised for the specific application needs. Each IO module accepts up to four additional RTD inputs. The alarm output can be used to control an external annunciator. The digital input is programmable and may be used for various functions such as forcing heattracing outputs on or off or generating CB trip alarms.



RMM2

The NGC-40 system works with the MONI-RMM2 module and each RMM2 can accept up to 8 RTDs. 16 RMM2 Modules can be daisy chained together via RS-485 for a total of 128 temperature inputs per NGC-40-BRIDGE. This will significantly reduce the cost of RTD field wiring.







Communication module: NGC-40-BRIDGE

The NGC-40 system supports multiple communications ports, allowing serial interfaces (RS-485 and RS-232) and network connections (Ethernet) to be used with external devices. All communications with the NGC-40 panel are accomplished through the NGC-40-BRIDGE module which acts as the central router for the system, connecting the panel's control modules, IO modules, safety limiter modules, RMM2 modules, as well as upstream devices such as TOUCH 1500 touch screen, Supervisor and Distributed Control System (DCS). Communications to devices external to the NGC-40 panel use the Modbus protocol over Ethernet, RS-485 or RS-232.



Power termination module: NGC-40-PTM

The NGC-40-PTM distributes power to the NGC-40 modules. Each NGC-40-PTM can provide power to a maximum of 10 NGC-40 modules and supports redundant power supply connections.



nVent RAYCHEM TOUCH 1500

The TOUCH 1500 user interface has easy-to-navigate displays, with intuitive screens for use with the NGC-40 and nVent RAYCHEM NGC-20 control panels. The TOUCH 1500 is to be installed where the physical heat-tracing hardware is located to assist with system commissioning, setup, troubleshooting and on-site monitoring and control. The TOUCH 1500 has a 15-inch LCD color display with touch-screen technology, and provides an easy user interface for programming without using keyboards. It has RS485, RS232, and 10/100Base-T Ethernet communications ports that allow communication with the Bridge Module (NGC-40-BRIDGE). An USB interface is included for configuration and software upgrades.



nVent RAYCHEM Supervisor software

The Supervisor software package provides a remote, graphic interface for the NGC-family. The software allows the user to configure and monitor various NGC systems from a central location. It also provides an audible alarm tone, acknowledges and clears alarms; and contains advanced features such as data logging, trending, batched change management, and other useful functions. Users can access all information from anywhere in the world, making Supervisor a powerful management tool for the entire Heat Management System.


For more detailed specifications of the modules see the NGC-40 datasheet.

Technical details

- · Colour: RAL 7035
- Protection degree: IP55
- · Cable entry: bottom panel, split bottom plate
- · Power: 3 Phase + Neutral Phase-to-phase: 400 V
- · Incomer: 3P+N+PE
- · Earthing: TN-S
- Short circuit protection: 10 kA / 25 kA depending upon panel selection
- Load break switch: 160 A, 250 A, 400 A depending upon panel selection
- · Outgoing circuits:
 - ELCB 1-phase circuits: 16 A, 2P, 30 mA or 25 A, 2P, 30 mA depending upon panel selection
 - ELCB 3-phase circuits: 40 A, 4P, 30 mA
- Terminal size outgoing circuits: 10 mm²
- · Panel dimensions: depending upon configuration. See section panel combinations

Standard panel combinations

The following table shows typical combinations of panels usable in different applications, followed by a list showing individual panels including their part number.




PSS-160A/10kA-PDS-40-24HTC/16A

- · NGC-40 control & monitoring system
- · Incomer: rated 160 A, 3P+N, 10 kA short circuit
- Outgoing circuits: 24 * 1-Phase controller, 2P EMR, ELCB 16 A (2P), 30 mA
- Size: 1200 (w) * 2200 (h) * 400 (d) including plinth

PSS-160A/10kA-PDS-40-24HTC/16A-T

Including User Interface TOUCH 1500




PSS-160A/10kA-PDS-40-30HTC/16A

- · NGC-40 control & monitoring system
- · Incomer: rated 160 A, 3P+N, 10 kA short circuit
- Outgoing circuits: 30 * 1-Phase controller, 2P EMR, ELCB 16 A (2P), 30 mA
- Size: 1200 (w) * 2200 (h) * 400 (d) including plinth

PSS-160A/10kA-PDS-40-30HTC/16A-T

• Including User Interface TOUCH 1500



PSS-160A/10kA-PDS-40-12HTC/25A-2HTC3/40A

- · NGC-40 control & monitoring system
- · Incomer: rated 160 A, 3P+N, 10 kA short circuit
- · Outgoing circuits:
 - 12 * 1-Phase controller, 2P EMR, ELCB 25 A (2P), 30 mA
 - 2 * 3-Phase controller, 4P EMR, ELCB 40 A (4P), 30 mA
- Size: 800 (w) * 2200 (h) * 400 (d) including plinth

PSS-160A/10kA-PDS-40-12HTC/25A-2HTC3/40A-T

• Including User Interface TOUCH 1500












Incomer section: PSS-250A/25kA (-T)

- 250 A, 3P+N, 25 kA short circuit
- Size: 600 (w) * 2200 (h) * 400 (d) including plinth
- Optional: User Interface TOUCH 1500

Outgoing section: PDS-40R-18HTC/25A

- 18 * 1-Phase controller, 2P EMR, ELCB 25 A (2P), 30 mA
- Size: 800 (w) * 2200 (h) * 400 (d) including plinth




Incomer section: PSS-250A/25kA (-T)

- 250 A, 3P+N, 25 kA short circuit
- Size: 600 (w) * 2200 (h) * 400 (d) including plinth
- Optional: User Interface TOUCH 1500

Outgoing section: PDS-40R-24HTC/25A

- 24 * 1-Phase controller, 2P EMR, ELCB 25 A (2P), 30 mA
- Size: 1200 (w) * 2200 (h) * 400 (d) including plinth




Incomer section: PSS-250A/25kA (-T)

- 250 A, 3P+N, 25 kA short circuit
- Size: 600 (w) * 2200 (h) * 400 (d) including plinth
- Optional: User Interface TOUCH 1500

Outgoing section: PDS-40R-30HTC/25A

- 30 * 1-Phase controller, 2P EMR, ELCB 25 A (2P), 30 mA
- Size: 1200 (w) * 2200 (h) * 400 (d) including plinth



Incomer section: PSS-400A/25kA (-T)

- · 400 A, 3P+N, 25 kA short circuit
- Size: 600 (w) * 2200 (h) * 400 (d) including plinth
- · Optional: User Interface TOUCH 1500

Outgoing section: PDS-40R-12HTC3/40A

- 12 * 3-Phase controller, 4P EMR, ELCB 40 A (4P), 30 mA
- Size: 800 (w) * 2200 (h) * 400 (d) including plinth




Outgoing section: PDS-40-12SLIM

- 12 * Safety Temperature Limiter, 40 A 4P EMR
- Up to 3 sensors per NGC-40-SLIM device
- To be combined with all other NGC-40 power distribution panels (PDS)
- Size: 600 (w) * 2200 (h) * 400 (d) including plinth








Incomer section: PSS-250A/25kA (-T)

- 250 A, 3P+N, 25 kA short circuit
- Size: 600 (w) * 2200 (h) * 400 (d) including plinth
- Optional: User Interface TOUCH 1500

Outgoing section: PDS-40R-3PASC-24CB/25A

- 3 PASC controlled groups, 3 * EMR, 4P, 80 A
- CB: 24 * 25 A (1-Phase, 2P), 30 mA
- Size: 800 (w) * 2200 (h) * 400 (d) including plinth



Incomer section: PSS-250A/25kA

- 250 A, 3P+N, 25 kA short circuit
- Size: 600 (w) * 2200 (h) * 400 (d) including plinth

Outgoing section: PDS-R-30CB/25A

- ELCB 30 * 25 A (2P), 30 mA
- · No controllers
- · Auxiliary contacts CBs to terminals
- Size: 800 (w) * 2200 (h) * 400 (d) including plinth

For a more detailed description of the panels please ask your local representative.

APPROVALS

For use in ordinary area

Product certification

Complete panel















ORDERING INFORMATION

Standard panel description

| Product Name | Description | Part Number |
|---|--|-------------|
| PSS-160A/10kA-PDS-40-24HTC/16A-T | Incoming section 160 A, 10 kA, Outgoing section 24 * NGC-40-HTC 16A circuits with TOUCH 1500 | 1244-014348 |
| PSS-160A/10kA-PDS-40-24HTC/16A | Incoming section 160 A, 10 kA, Outgoing section 24 * NGC-40-HTC 16A circuits. No TOUCH 1500 | 1244-014349 |
| PSS-160A/10kA-PDS-40-30HTC/16A-T | Incoming section 160 A, 10 kA, Outgoing section 30 * NGC-40-HTC 16A circuits with TOUCH 1500 | 1244-014350 |
| PSS-160A/10kA-PDS-40-30HTC/16A | Incoming section 160 A, 10 kA, Outgoing section 30 * NGC-40-HTC 16A circuits. No TOUCH 1500 | 1244-014351 |
| PSS-160A/10kA-PDS-40-12HTC/25A- HTC3/40A-T | Incoming section 160 A, 10 kA, Outgoing section 12 * NGC-40-HTC 25A and 2 * NGC-40-HTC3 40A circuits with TOUCH 1500 | 1244-014352 |
| PSS-160A/10kA-PDS-40-12HTC/25A- 2HTC3/40A | Incoming section 160 A, 10 kA, Outgoing section 12 * NGC-40-HTC 25A and 2 * NGC-40-HTC3 40A circuits. No TOUCH 1500 | 1244-014353 |
| PSS-250A/25kA-T | Incomer panel 250 A, 25 kA with TOUCH 1500 User Interface | 1244-014354 |
| PSS-250A/25kA | Incomer panel 250 A, 25 kA, No TOUCH 1500 User Interface | 1244-014355 |
| PSS-400A/25kA-T | Incomer panel 400 A, 25 kA with TOUCH 1500 User Interface | 1244-014356 |
| PSS-400A/25kA | Incomer panel 400 A, 25 kA, No TOUCH 1500 User Interface | 1244-014357 |







| Product Name | Description | Part Number |
|------------------------|--|-------------|
| PDS-40L-18HTC/25A | NGC-40 Outgoing panel, 18 HTC circuits, 25A CB, positioned on left side of PSS panel. | 1244-014358 |
| PDS-40R-18HTC/25A | NGC-40 Outgoing panel, 18 HTC circuits, 25A CB, positioned on right side of PSS panel. | 1244-014359 |
| PDS-40L-24HTC/25A | NGC-40 Outgoing panel, 24 HTC circuits, 25A CB, positioned on left side of PSS panel. | 1244-014360 |
| PDS-40R-24HTC/25A | NGC-40 Outgoing panel, 24 HTC circuits, 25A CB, positioned on right side of PSS panel. | 1244-014361 |
| PDS-40L-30HTC/25A | NGC-40 Outgoing panel, 30 HTC circuits, 25A CB, positioned on left side of PSS panel. | 1244-014362 |
| PDS-40R-30HTC/25A | NGC-40 Outgoing panel, 30 HTC circuits, 25A CB, positioned on right side of PSS panel. | 1244-014363 |
| PDS-40L-12HTC3/40A | NGC-40 Outgoing panel, 12 HTC3 circuits, 40A CB, positioned on left side of PSS panel. | 1244-014364 |
| PDS-40R-12HTC3/40A | NGC-40 Outgoing panel, 12 HTC3 circuits, 40A CB, positioned on right side of PSS panel. | 1244-014365 |
| PDS-40-12SLIM | NGC-40 outgoing panel, 12 * Safety Temperature Limiter panel. | 1244-014476 |
| PDS-40L-3PASC-24CB/25A | NGC-40 outgoing panel, 3 PASC circuits feeding 24 outgoing Circuits, 25 A each, positioned on right side of PSS panel. | 1244-014477 |
| PDS-40R-3PASC-24CB/25A | NGC-40 outgoing panel, 3 PASC circuits feeding 24 outgoing Circuits, 25 A each, positioned on right side of PSS panel. | 1244-014478 |
| PDS-L-30CB/25A | Outgoing panel, 30 uncontrolled circuits, 25 A each, positioned on right side of PSS panel. | 1244-014479 |
| PDS-R-30CB/25A | Outgoing panel, 30 uncontrolled circuits, 25 A each, positioned on right side of PSS panel. | 1244-014480 |

Product name definition

| | PSS-***A/**kA-T |
|------|--|
| PSS | Power Supply System |
| ***A | 250: 250 A incomer switch 400: 400 A incomer switch |
| **kA | 10: 10 kA short circuit protection 25: 25 kA short circuit protection |
| Т | TOUCH 1500 (optional) |

| | PDS-40*-**HTC/*A-**HTC3/*A-*PASC-**CB/*A |
|-----------|---|
| | Power Distribution System |
| 40* | 40: Panel equipped with NGC-40 controllers. |
| | L: The panel is positioned on left side of PSS panel. |
| | R: The panel is positioned on right side of PSS panel. |
| **HTC/*A | **: Number of NGC-40-HTC controllers |
| | *: CB rating of electrical heat tracing circuits |
| **HTC3/*A | **: Number of NGC-40-HTC3 controllers |
| | *: CB rating of electrical heat tracing circuits (per phase) |
| *PASC | *: number of PASC controllers |
| **CB/*A | **: Number on uncontrolled/PASC outgoing circuits |
| | *: CB rating of uncontrolled/PASC circuits. |
| | PSS-***A/**kA-PDS-40-**HTC/**A |
| | Panel including incoming and outgoing sections in one enclosure. For individual description of components see explanation text above. |

Panels & Communication

Zone 2 Control & **Monitoring Panels**



CONNECT AND PROTECT

Zone 2 Control & Monitoring Panels

PRODUCT OVERVIEW



The nVent RAYCHEM Zone 2 Control and Monitoring panels are configurable Electric Heat-Tracing (EHT) panels that are ATEX and IECEx approved. The enclosure and all components are Zone 2 approved, including the nVent HOFFMAN Zonex enclosure, the nVent RAYCHEM NGC-30, NGC-40 and Elexant 4020i controllers as well as the Solid-State Relays used for switching the heat-tracing circuits. Ratings of up to 63 Amps at 690 Vac per circuit leads to the most flexible and optimized designs. The panels meet the IEC/EN 61439 and 60079 series standards and are designed, manufactured, tested & approved by a hazardous area approved nVent factory. The Zone 2 panels can be used in Arctic regions down to -55°C by using the patented heating solution included in the panel.













| Controller Type | Max # Circuits | Panel Size (H x W x D) | Panel Front View |
|------------------|----------------|--------------------------------------|------------------|
| Elexant 4020i | 1 | 500 x 500 x 210 mm Wall mounted | |
| Elexant 4020i | 2 | 750 x 500 x 210 mm Wall mounted | |
| NGC-30 NGC-40 | 5 | 600 x 600 x 300 mm Wall mounted | |
| NGC-30 NGC-40 | 20 18 | 1067 x 927 x 320 mm Wall mounted | |
| NGC-30 NGC-40 | 40 36 | 2100 x 927 x 600 mm Free standing | |

Zone 2 panel

| Ingress Protection | IP66 |
|-------------------------------------|---|
| Ambient operating temperature range | −55°C to +60°C |
| Ambient storage temperature | −55°C to +70°C |
| Max. altitude | 2000 m |
| Humidity | 5 -90% non-condensing |
| Controller types | NGC-40: mix of NGC-40-HTC / HTC3 / IO / SLIM modules NGC-30: mix of NGC-30-CRMS, NGC-30-CTM / NGC-30-CVM boards Elexant 4020i: all version of the available Elexant 4020i controllers Other electronics upon request and validation |
| Gland entries | The Zone 2 panels can be delivered with predrilled holes and glands when specified during the ordering process. If holes need to be drilled onsite, special instructions of safe use shall be applied. |

Panel configuration string

The configuration for the Zone 2 panel is represented by a configuration string, and the parameters in the string define the content of the panel. Any comments can be added to the string or discussed with the sales representative. The following table shows each parameter and presents examples:

| Config string parameter | Values |
|----------------------------|--|
| Type of panel | NGC30: NGC-30 |
| | NGC40: NGC-40 |
| | E4020i: Elexant 4020i |
| Electrical standard | E: IEC |
| Area class | SAFE: Safe Area |
| | ZONE2: Zone 2 |
| Panel size (# of circuits) | 0-40 |
| Enclosure | SS: Stainless Steel (IP66) |
| | SW: Stainless Steel with Window (IP66) AL: Aluminium |
| Control voltage (L-N) | 230: 230 Vac |
| | 400: 400 Vac |
| Power distribution | PDY: Power distribution included |
| | PDN: No power distribution included |
| MCB/Load switch | LS80: Load Switch 80 Amp |
| | LS120: Load Switch 120 Amp |
| | LS250: Load Switch 250 Amp |
| Heated | HTN: Panel not heated |
| | HTY: Panel heated via patented heating system |
| CNTRL | CNTRL: Control |
| | PD: Power Distribution |
| | PD/CNTRL: Power Distribution and Control |
| Number of circuits | 0-40 |
| Circuit breaker type | RCBO/2P20C: circuit breaker with earth leakage protection, 2 Pole, 20 Amps, type C |
| | RCBO/2P25C: circuit breaker with earth leakage protection, 2 Pole, 25 Amps, type C |
| | RCBO/2P32C: circuit breaker with earth leakage protection, 2 Pole, 32 Amps, type C |





| Config string parameter | Values |
|--------------------------|---|
| Module type | 4020iMOD: 4020i-Mod |
| Woddie type | 4020iModIS: 4020i-Mod-IS |
| | 4020iModISLIM: 4020i-Mod-IS-LIM |
| | 4020iMod3P: 4020i-Mod-3P |
| | |
| | 4020iMod3PIS: 4020i-Mod-3P-IS |
| | 4020iModISPROF: 4020i-Mod-IS-PRF |
| | 4020iModISLIMPRF: 4020i-Mod-IS-LIM-PRF |
| | 4020iMod3PISPRF: 4020i-Mod-3P-IS-PRF |
| | NGC40HTC: NGC-40-HTC |
| | NGC40-HTC3: NGC-40-HTC3 |
| | NGC40-IO: NGC-40-IO (*1) |
| | NGC30CRM: NGC-30-CRM |
| | NGC30-CRMS: NGC-30-CRMS |
| | NGC20CE: NGC-20-C-E |
| | NGC-20CLE: NGC-20-CL-E |
| Additional module | NGC-40SLIM: NGC-40-SLIM |
| | NGC30CTM: NGC-30-CTM |
| | NGC30CVM: NGC-30-CVM |
| Poles | 1, 2, 3 |
| Phase selection | LN: L-N |
| | LL: L-L |
| | L1L2L3: L1-L2-L3 |
| | L1L2L3N: L1-L2-L3-N |
| Type of relay and rating | SS3EX: 32A 277 Vac, 6 mm ² cable |
| Type of relay and rating | SS3ZEX: 32A 277 Vac, 6 mm² cable, Low Smoke Zero Halogen |
| | SS3LEX: 32A 277 Vac, 10 mm² cable |
| | SS3LZEX: 32A 277 Vac, 10 mm² cable, Low Smoke Zero Halogen |
| | SS3REX: 32A 277 Vac, high in-rush, 6 mm² cable |
| | |
| | SS3RZEX: 32A 277 Vac, high in-rush, 6 mm² cable, Low Smoke Zero Halogen |
| | SS3RLEX: 32A 277 Vac, high in-rush, 10 mm ² cable |
| | SS3RLZEX: 32A 277 Vac, high in-rush, 10 mm ² cable, Low Smoke Zero Halogen |
| | SSH3EX: 32A 690 Vac, 6 mm ² cable |
| | SSH3ZEX: 32A 690 Vac, 6 mm² cable Low Smoke Zero Halogen |
| | SSH3LEX: 32A 690 Vac, 10 mm ² cable |
| | SSH3LZEX: 32A 690 Vac, 10 mm² cable Low Smoke Zero Halogen |
| | SSH6LEX: 63A 690 Vac, 10 mm ² |
| | SSH6LZEX: 63A 690 Vac, 10 mm² cable Low Smoke Zero Halogen |
| | 3SSR-SS3: Heated, 32A 277 Vac |
| | 3SSR-SS3R: Heated, 32A 277 Vac, High inrush |
| | 3SSR-SSH3: Heated, 32A 690 Vac |
| Skid | Yes |
| | No |
| Transformer | TransYes: Transformer included |
| | TransNo: No Transformer |





NGC40-E-ZONE2-15-SS-230- PDN-HTN-CNTRL-12-NGC40HTC-1-LN-SS3REX-3-NGC40HTC3-2-LL-SS3REX-AR-AL

18 circuits NGC-40-HTC, 1 pole switching Line-Neutral, Solid state relay 32 Amp switching high inrush

· NGC-40 panel, Zone 2, 15 circuits:

- TOUCH 1500 user interface

• NGC-40 panel, Zone 2, 18 circuits:

- Phase-Neutral = 230 Vac - No power distribution

- Circuit Configuration:

- Stainless steel

Config string parameter

General options

Comment box

- Stainless steel

- Non heated

- Alarm relays - Alarm lights

Examples:

Values

RMM2 RMM2DI

Free format text

NGC40-E-ZONE2-18-SS-230- PDN-HTN-CNTRL-18-NGC40HTC-1-LN-SS3REX-T1500-AR-AL

T1500: TOUCH 1500-EX

W800: Wireless 868 MHz W2400: Wireless 2.4 GHz Ant: Omni Antenna for wireless


AL: Alarm Lights (power / control alarm) AR: Alarm Relay (power / control alarm)

UIT: NGC-UIT3-EX

- Phase-Neutral = 230 Vac
- No power distribution
- Non heated
- Circuit Configuration:
 - 12 circuits NGC-40-HTC, 1 pole switching Line-Neutral, Solid state relay 32 Amp switching high inrush
 - 3 circuits NGC-40-HTC3, 2 pole switching Line-Line, Solid state relay 32 Amp switching high inrush
- Alarm relays
- Alarm lights


NGC40-E-ZONE2-13-SS-230-PDN-HTY-CNTRL-10-NGC40HTC-1-LN-HSS3EX-3-NGC40HTC3-3-LLL-HSS3EX-W24-ANT-AL-AR

- · NGC-40 panel, Zone 2, 13 circuits
 - Stainless steel
 - Phase-Neutral = 230 Vac
 - No power distribution
 - Heated
 - Circuit Configuration:
 - 10 circuits NGC-40-HTC, 1 pole switching Line-Neutral, Solid State relay 32 Amp switching
 - · 3 circuits NGC-40-HTC3, 3 poles switching, L1-L2-L3, Solid State relay 32 Amp, Wireless radio 2.4 GHz, Alarm lights, Alarm relays, TOUCH 1500
 - Wireless radio 2.4 GHz
 - Antenna
 - Alarm Lights
 - Alarm Relays

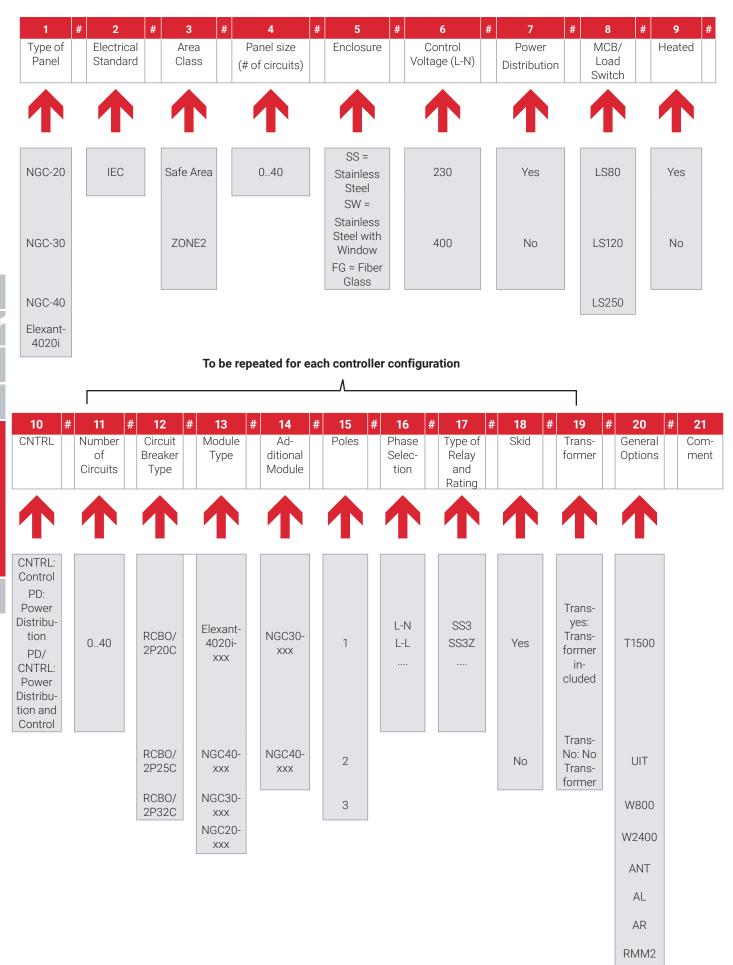

RMM2-DI

nVent RAYCHEM NGC-40

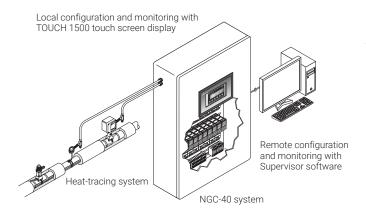

The nVent RAYCHEM NGC-40 is a multipoint electronic control system with a unique single point controller architecture for heattracing used in process temperature maintenance and freeze protection applications. By taking advantage of innovative modular packaging techniques, the NGC-40 control system provides configuration and component flexibility so that it may be optimized for a customer's specific needs.


The NGC-40 uses a single controller module per heat-tracing circuit for maximum reliability. The NGC-40 control system in combination with the solid-state relays can be used for 1-phase and 3-phase heat-tracing circuits up to 63 Amp at 690 Vac. The NGC-40 control modules include ground-fault measurements and as well single-phase and three-phase line current measurements. The Safety Temperature limiter can be used in combination with hazardous area approved contactors for control limited designs in Zone 1 applications (with controller panel in Zone 2).

Temperature inputs: Each IO module accepts up to four additional RTD inputs. Each RMM2 module installed in the field can accept up to 8 RTDs. 16 RMM2 Modules can be daisy chained together via RS-485 for a total of 128 (8x16) RTDs. Since multiple RMM2's can be networked over a single cable to the NGC-40, the cost of RTD field wiring will be significantly reduced.

Digital inputs: The NGC-40 control system can be extended with the Digital Input module RMM2-DI. This enables the capability monitoring of equipment in the field like circuit breakers, switches

Communication: The NGC-40 support Industry 4.0 and the Internet of Things (IoT) by offering a flexible Modbus map creating a very easy way of integrating the TOUCH 1500 user interface with external control systems. The NGC-40 system supports multiple communications ports, allowing serial interfaces (RS-485 and RS-232) and Ethernet connections to be used with external devices. All communications with the NGC-40 panel are accomplished through the NGC-40-BRIDGE module which acts as the central router for the system, connecting the panel's control modules, IO modules, TOUCH 1500 touch screen and Remote Monitoring Modules (RMM2), as well as upstream devices such as nVent RAYCHEM Supervisor and the TOUCH 1500 user interface.

nVent RAYCHEM NGC-30

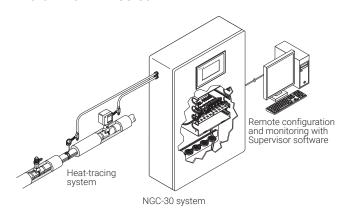

The nVent RAYCHEM NGC-30 is a multi-circuit electronic control system for heat-tracing used in process-temperature maintenance and freeze-protection applications. The NGC-30 Controller can accommodate temperature inputs from a variety of sources: hard-wired to the panel mounted CRM(S) modules or from Remote Monitoring Modules (RMM2).

The NGC-30 for Zone 2 applications is equipped with the card rack module for solid-state-relays (CRMS), rated up to 63 Amp at 690 Vac.

Up to four PT100 sensor inputs for each heat-tracing circuit allow for a variety of combinations of temperature control, monitoring, and alarming. The ability to monitor and configure the controller is available both locally and remotely with the User Interface Unit (NGC-UIT3-EX) and the Supervisor software.











The nVent RAYCHEM Elexant 4020i is a compact, full-featured, touch screen based, single-point heat-tracing controller. It provides control and monitoring of Electric Heat-Tracing (EHT) circuits for both freeze protection and process temperature maintenance. This controller can monitor and alarm on high and low temperature, high and low current, ground-fault levels, voltage, and supports a host of additional features to offer the utmost in control and monitoring of EHT. The Elexant 4020i controller provides three output types: a line powered relay for driving contactors, a DC output for driving solid-state relays (SSRs) and a 0-10 V analog output for driving variable output power modules. Multiple communication ports allow flexible connectivity for remote monitoring, configuration, and ease of integration with Supervisor software, TOUCH 1500-EX or a Process Control System.

Solid state relay modules

The Zone 2 approved solid state relay (SSRs) modules are available in various versions and may be used with any of the controller products outlined above. They are mounted on the side of the panel enabling good heat transfer to keep heat away from the inside of the panel. The heated SSR module always contains groups of three SSR modules mounted on one heat sink. The Type of SSR, including voltage, amperage, inrush current as well as the cable size and type of cable are specified at the panel configuration procedure.

The minimum ambient operating temperature of the heated SSRs is -55° C.

Elexant 9200i wireless radio

Each panel can be optionally equipped with the Elexant 9200i wireless radio modules. The radios enable wireless communications between the Zone 2 panels and the network User Interfaces such as the TOUCH 1500-EX, UIT3-EX, and/or Supervisor. The radios using 868 MHz and 2.4 GHz are available, and they support point-to-point, star, line, and Mesh network topologies. Security is ensured through use of the 128-bit Advanced Encryption Standard (EAES). Reliability is enhanced by network self-healing capabilities and auto-negotiation of alternate pathways in the event of lost communications. Antennas can be installed on the panel or when needed, antenna packages are available to allow remote installation for improved range. For more details see the specifications of the Elexant 9200i.

APPROVALS

For use in ordinary and hazardous area Zone 2 (Gas)

Temperature classification

Temperature classification depends on panel configuration

Product certification







More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHFM

NGC-30 / NGC-40 / Elexant 4020i

For use in ordinary and hazardous area Zone 2 (Gas)

Temperature classification

NGC-40: T4 NGC-30: T5 Elexant 4020i: T4

Product certification







More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

Optional components

The Zone 2 panels provide flexible configurations - the following items are optionally available:

| Item | Can Be Used With |
|---------------|---|
| TOUCH 1500-EX | NGC-40, Elexant 4010i / 4020i, (field mounted) NGC-20 |
| NGC-UIT3-EX | NGC-30, (field mounted) NGC-20 |
| Alarm Lights | All controllers |
| Alarm Relay | All controllers |
| RMM2 | Remote monitoring module for Temperature Inputs |
| RMM2-DI | Remote monitoring module for Digital Inputs |













nvent RAYCHEM

Elexant 9200i

CONNECT AND PROTECT

Wireless communications interface

PRODUCT OVERVIEW



The nVent RAYCHEM Elexant 9200i is a Wireless Communications Interface that provides an alternative solution to hardwired Remote Monitoring and Configuration of Electric Heat Tracing (EHT) systems. It integrates with nVent RAYCHEM Supervisor software and EHT controllers, helping reduce total cost of ownership of a project.

The Elexant 9200i product line consists of the following:

- · Standalone enclosures
- A wireless communications option within a given Control Panel
- External antenna packages

A minimum of two radio transceivers are required to establish a network. Standalone enclosures can be configured in many ways, enabling the customer to choose from a range of options: enclosure material, radio frequency, and antenna type.

Installation

The Elexant 9200i comes ready to install, eliminating the need for custom modifications. Components are approved for both indoor and outdoor locations. Wiring is as simple as connecting the incoming power and communications wiring. If so chosen, the external antenna and associated coaxial cable, need be mounted and routed as per the requirements of the system.

Interfacing with and programming transceivers is accomplished through the specific transceiver Manufacturer's radio programming software and applicable interface cable.

Communication

Each Elexant 9200i comes equipped with an interface that allows connection to the nVent RAYCHEM Supervisor software and nVent EHT Controllers.

Supporting Information

Further information pertaining to transceiver hardware and software can be found within associated manufacturer's documentation.

Features

- Available in three frequencies for global coverage:
 - 868 MHz, 900 MHz, 2.4 GHz
- Multiple network topologies & modes
 - Point to Point / Star, Line / Mesh
 - I/O Data, Serial, PLC / Modbus RTU
- · Multiple Radio setup types
 - Parent, Child, Repeater / Child
 - 128 bit Advanced Encryption Standard (AES)
- · Self-Healing
 - Radios auto-negotiate alternate pathways in the event of a lost path
- · Long distance coverage









Technical details


| Electromagnetic Compatibility | Conformance with EMC Directive's 2004/108/EC and 2004/30/EU |
|-------------------------------|---|
| Supply Voltage | 100 - 240 VAC, 50-60 Hz |
| Internal power consumption | < 9 W (900 MHz), 2 W (868 MHz & 2.4 GHz) |
| Transmission power | < 1 W |

Environmental


| Protection | NEMA 4X, IP64 (FG enclosure), IP 66 (Stainless Steel Enclosure) |
|-------------------------------|--|
| Materials | Fiberglass (FG) or Stainless Steel (SS304) |
| Ambient operating temperature | -40°C to 47°C (-40°F to 116°F) cULus variants -40°C to 52°C (-40°F to 125°F) IECEx/ATEX/UKEx variants |
| Ambient storage temperature | -40°C to 85°C (-67°F to 185°F) |
| Relative humidity | 20% to 85% noncondensing |
| Environment | PD2, CAT III |
| Max. altitude | 2,000 m (6,562 ft) |

Typical enclosure dimensions (inches [mm])

Elexant 9200i-X-PC-XXX-FW

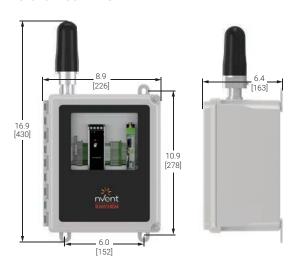


Elexant 9200i-X-PC-XXX-FW-EXT

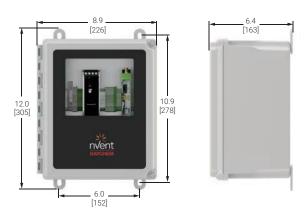

Elexant 9200i-X-PC-XXX-SW



Elexant 9200i-X-PC-XXX-SW-EXT

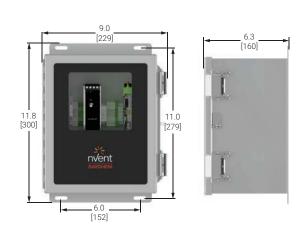



Mounting

| Fiberglass enclosure | Surface mount with four holes on 6.0 in. x 10.9 in. (152 mm x 278 mm) centers - hole diameter: 0.3 in (8 mm) |
|---------------------------|--|
| Stainless Steel enclosure | Surface mount with four holes on 6.0 in. x 11 in. (152 mm x 279 mm) centers - hole diameter: 0.3 in (8 mm) |

Configuration

| Refer to Manufacturers documentation for supporting information: | | |
|--|------------------|----------------------|
| Method | Phoenix Contact: | |
| | RAD-XXXX-IFS | User Manual(s) |
| | PSI-CONF | Programming Software |
| 0 | DI | |

Connection Phoenix Contact:

RAD-CABLE-USB Radio Programming interface cable

Radio Parameters Appropriate parameters are provided through Engineering Services

Connection terminals

| Power supply input | Fuse terminal, $26-10$ AWG ($0.14-6$ mm 2), torque $0.6-0.8$ Nm Neutral terminal, $20-10$ AWG ($0.5-6$ mm 2), cage clamp Ground (Earth), $20-10$ AWG ($0.5-6$ mm 2), cage clamp |
|-----------------------|--|
| RS-485 communications | Comm terminals, 22 – 12 AWG (0.25 – 4 mm²), cage clamp Ground (Earth), 22 – 12 AWG (0.25 – 4 mm²), cage clamp |

Communications

Radio

| Туре | Phoenix Contact: 868 MHz, 900 MHz, and 2.4 GHz types available |
|-------|---|
| 0 1'1 | |

Quantity Phoenix Contact:

Up to 250 transceivers per network (900 MHZ & 2.4 GHz)

Up to 99 transceivers per network (868 MHZ)

RS-485

| Туре | RS-485, 2-wire |
|----------|--|
| Cable | Shielded, Twisted pair |
| Length | 4,000 ft. (1,200 m) maximum |
| Quantity | Up to 32 devices per serial port (Typical) |

APPROVALS

For use in hazardous area Class I, Division 2 / Zone 2 (Gas) - applicable to Enclosures

Temperature classification

T4

Product certification









More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.







nVent RAYCHEM Elexant 9200i Wireless Enclosures

(See Notes 1 and 2)

| Description | Catalog | Part | Weight |
|--|-------------------------|-----------------------------|-----------------------|
| Description Elexant 9200i 868 MHz Phoenix Contact module in FG enclosure | Number 10392-100 | Number 9200i-E-PC-868-FW | (kg/lbs) 3.9 / 8.6 |
| with window, antenna, and pre-drilled holes for power (M25) and communications (M20) | 10392-100 | 92001-E-PC-808-FVV | 3.9 / 8.0 |
| Elexant 9200i 868 MHz Phoenix Contact module in FG enclosure with window, external antenna connection, and pre-drilled holes for power (M25) and communications (M20) - antenna & coax sold separately | 10392-101 | 9200i-E-PC-868-FW-EXT | 3.2 / 7.1 |
| Elexant 9200i 868 MHz Phoenix Contact module in SS enclosure with window, antenna, and pre-drilled holes for power (M25) and communications (M20) | 10392-102 | 9200i-E-PC-868-SW | 6.7 / 14.7 |
| Elexant 9200i 868 MHz Phoenix Contact module in SS enclosure with window, external antenna connection, and pre-drilled holes for power (M25) and communications (M20) - antenna & coax sold separately | 10392-103 | 9200i-E-PC-868-SW-EXT | 6.0 / 13.2 |
| Elexant 9200i 900 MHz Phoenix Contact module in FG enclosure with window and antenna | 10392-104 | 9200i-A-PC-900-FW | 3.9 / 8.6 |
| Elexant 9200i 900 MHz Phoenix Contact module in FG enclosure with window and external antenna connection - antenna & coax sold separately | 10392-105 | 9200i-A-PC-900-FW-EXT | 3.2 / 7.1 |
| Elexant 9200i 900 MHz Phoenix Contact module in SS enclosure with window and antenna | 10392-106 | 9200i-A-PC-900-SW | 6.7 / 14.7 |
| Elexant 9200i 900 MHz Phoenix Contact module in SS enclosure with window and external antenna connection - antenna & coax sold separately | 10392-107 | 9200i-A-PC-900-SW-EXT | 6.0 / 13.2 |
| Elexant 9200i 2.4 GHz Phoenix Contact module in FG enclosure with window and antenna | 10392-108 | 9200i-A-PC-024-FW | 3.9 / 8.6 |
| Elexant 9200i 2.4 GHz Phoenix Contact module in FG enclosure with window and external antenna connection - antenna & coax sold separately | 10392-109 | 9200i-A-PC-024-FW-EXT | 3.2 / 7.1 |
| Elexant 9200i 2.4 GHz Phoenix Contact module in SS enclosure with window and antenna | 10392-110 | 9200i-A-PC-024-SW | 6.7 / 14.7 |
| Elexant 9200i 2.4 GHz Phoenix Contact module in SS enclosure with window and external antenna connection - antenna & coax sold separately | 10392-111 | 9200i-A-PC-024-SW-EXT | 6.0 / 13.2 |
| Elexant 9200i 2.4 GHz Phoenix Contact module in FG enclosure with window, antenna, and pre-drilled holes for power (M25) and communications (M20) | 10392-112 | 9200i-E-PC-024-FW | 3.9 / 8.6 |
| Elexant 9200i 2.4 GHz Phoenix Contact module in FG enclosure with window, external antenna connection, and pre-drilled holes for power (M25) and communications (M20) - antenna & coax sold separately | 10392-113 | 9200i-E-PC-024-FW-EXT | 3.2 / 7.1 |
| Elexant 9200i 2.4 GHz Phoenix Contact module in SS enclosure with window, antenna, and pre-drilled holes for power (M25) and communications (M20) | 10392-114 | 9200i-E-PC-024-SW | 6.7 / 14.7 |
| Elexant 9200i 2.4 GHz Phoenix Contact module in SS enclosure with window, external antenna connection, and pre-drilled holes for power (M25) and communications (M20) - antenna & coax sold separately | 10392-115 | 9200i-E-PC-024-SW-EXT | 6.0 / 13.2 |

^{*} Not all variants are available in all regions

nVent RAYCHEM Elexant 9200i Wireless Antenna Packages

All Antenna Packages listed are accessories to the Enclosures shown above, and are shown to assist the customer in product selection. However, they are not included in the approvals of the Enclosures. Each component of the antenna packages must have its own suitable certification for each use case. Refer to the section on 'SPECIFIC CONDITIONS OF SAFE USE' in the Installation Manual for further information. (See Notes 1 and 2)

| Description | Catalog Number | Part Number | Weight (kg/lbs) |
|--|-------------------|--------------------------|--------------------|
| Elexant 9200i 868 MHz Antenna Package Accessory - OMNI 2 dBi antenna with 3 meter coaxial cable, antenna bracket, and gland | 10392-151 | 9200i-E-PC-ANT-868-OM1-3 | 1.4 / 3.1 |
| Elexant 9200i 868 - 900 MHz Antenna Package Accessory - OMNI 2 dBi antenna with 3 meter coaxial cable, antenna bracket, and gland | 10392-152 | 9200i-A-PC-ANT-900-OM2-3 | 1.4 / 3.1 |
| Elexant 9200i 2.4 GHz Antenna Package Accessory - 2 dBi antenna with 3 meter coaxial cable, antenna bracket, and gland | 10392-153 | 9200i-C-PC-ANT-024-0M3-3 | 1.4 / 3.1 |
| Elexant 9200i 868 - 900 MHz Antenna Package Accessory - OMNI 5 dBi YAGI antenna with 3 meter coaxial cable, antenna bracket, and gland | 10392-154 | 9200i-C-PC-ANT-900-YA1-3 | 2.1 / 4.6 |
| Customized Antenna Package Accessory | 9200i-ANT-C | 9200i-ANT-C | N/A |

Notes:

- 1. Many countries restrict the use of specific Radio Frequencies. In general, the following frequencies can be used accordingly:
 - a. 868 MHz EMEAI
 - b. 900 MHz North America
 - c. 2.4 GHz Global
- 2. Further information pertaining to specific regional information can be found within the manufacturer's documentation.




RS485-WIRE



CONNECT AND PROTECT

RS485 communication cables

PRODUCT OVERVIEW

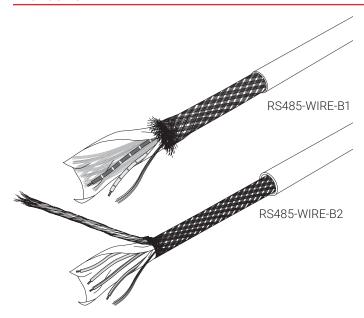

nVent RAYCHEM RS485-WIRE are braided and shielded type cables suitable for RS485 data transmission. Screen continuity and polarity must be maintained throughout the entire communication network. Connections must be made at each panel in accordance with the details provided in the appropriate product manual. Do not share communication cables with other signals or power.

Zero Halogen (Low Smoke) cables of the same construction are available on request. (Flame retardant to IEC 60332-3C).













PRODUCT SPECIFICATIONS

Technical details

| Туре | RS485-WIRE-B1 (Single pair construction) | RS485-WIRE-B2 (Dual pair construction) | | |
|----------------|--|--|--|--|
| Conductors | Two tinned Copper conductors | Four tinned Copper conductors | | |
| | 24 AWG (7 x 0.20 mm) | 24 AWG (7 x 0.20 mm) | | |
| Insulation | Polyethylene (PE) | Polyethylene (PE) | | |
| Pairing | One single twisted pair | Two twisted pairs | | |
| Identification | Blue/white + White/blue | Pair 1: Blue/white + White/blue | | |
| | | Pair 2: White/orange + Orange/white | | |
| Screening | Aluminium polyester tape | Aluminium polyester tape | | |
| | Tinned Copper Braid (90% coverage) | Tinned Copper Braid (90% coverage) | | |
| Jacket Type | RS485-WIRE-B1- and RS485-WIRE-B2 made | RS485-WIRE-B1- and RS485-WIRE-B2 made of PVC (Polyvinylchloride) | | |
| | RS485-WIRE-ZHB1- and RS485-WIRE-ZHB2 | 2 made of LSOH | | |
| Colour | All type Grey | All type Grey | | |

Electrical properties

| Туре | RS485-WIRE-B1 (Single pair construction) | RS485-WIRE-B2 (Dual Pair construction) |
|-------------------------|---|---|
| Max operating voltage | 300 V RMS | 300 V RMS |
| Capacitance | 45 Pf/m (measured between conductors) | 45 Pf/m (measured between conductors) |
| Conductor resistance | 80 Ohm/km Ø 20°C | 80 Ohm/km Ø 20°C |
| Nominal Impedance | 120 Ohm | 120 Ohm |
| Velocity of Propagation | 66% | 66% |
| Max allowed Current | 2.10 A @ 25°C | 2.10 A @ 25°C |

Physical properties

| Nominal Diameter (OD) | 5.90 mm (±0.2 mm) | 8.64 mm (±0.2 mm) |
|-----------------------|-------------------|-------------------|
| Temperature range | -30°C to +80°C | -30°C to +80°C |
| Minimum Bend radius | 63 mm | 89 mm |
| Max continuous length | 1000 m | 1000 m |

APPROVALS

RS485 communications, In- and outdoors.

Product certification



ORDERING INFORMATION

| Polyvinylchloride types | RS485-WIRE-B1 | RS485-WIRE-B2 |
|-------------------------|------------------------|------------------------|
| PN (Weight) | 1244-006598 (55 kg/km) | 1244-006599 (90 kg/km) |
| Zero Halogen types | RS485-WIRE-ZHB1 | RS485-WIRE-ZHB2 |
| PN (Weight) | 1244-006600 (55 kg/km) | 1244-006601 (90 kg/km) |







CONNECT AND PROTECT


Accessories

SUPPORTS

Support brackets are used to fix equipment such as thermostats or junction boxes on pipes or cable trays. Support brackets require additional pipe straps which have to be ordered separately.

They include a set of M6 and/or M4 fixing screws, nuts, washers and spring lock washers for the fixation of one junction box or thermostat. They are fabricated in stainless steel (SS304, and passivation).

The table below outlines the typical compatibility of each bracket with relevant equipment, for other equipment please contact nVent representative.

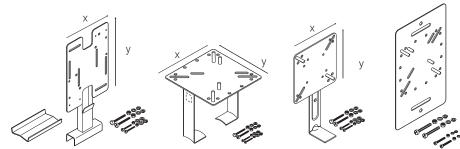

| | SB-100 192932-000 | SB-101 990944-000 | SB-110 707366-000 | SB-130** 1244-006602 |
|-----------------------------------|----------------------|----------------------|----------------------|-------------------------|
| AT-TS-13 | Х | X | Х | Х |
| AT-TS-14 | X | X | X | X |
| JB-82 | X | X | X | X |
| JB-NH2 | X | X | X | |
| JB-NH4 | X | X | X | |
| JB-EX-20(-EP) | X | X | X | X |
| JB-EX-21 | X | X | | X |
| JB-EX-21/35MM2 | | | | |
| JB-EX-25/35MM2 | | | | |
| JB-EX-32/35MM2 | | | | |
| JB-EX-42-EP | | | | |
| JBU-100(-L)-E(P) | X | X | | X |
| JB-EX-40-EP | X | X | | X |
| JB-EX-41-EP | X | X | | X |
| MONI-PT100-EXE | | X | | X |
| MONI-PT100-NH | | X | | X |
| MONI-PT100-4/20mA | | X | | X |
| RAYSTAT V5 | X | X | | X |
| RAYSTAT-EX-02 | X | X | X | X |
| ETS-05 | X | X | X | X |
| Elexant 5010i & Elexant 5010i-LIM | | | | |
| T-M-10-S/+x+y | X | X | X | X |
| T-M-20-S/+x+y(/EX) | | | X | |

^{**}Support bracket for fixation to cable trays

| X V V V V V V V V V V V V V V V V V V V | y v v v v v v v v v v v v v v v v v v v | */ |
|---|---|----|
|---|---|----|

| | SB-111 579796-000 | SB-120 165886-000 | JB-SB-26 338265-000 | SB-125 1244-00603 | |
|----------------------------------|----------------------|----------------------|------------------------|----------------------|--|
| AT-TS-13 | Х | | | | |
| AT-TS-14 | X | | | | |
| JB-82 | X | | | X | |
| JB-NH2 | X | | | | |
| JB-NH4 | X | | | | |
| JB-EX-20(-EP) | X | | | | |
| JB-EX-21 | | | | | |
| JB-EX-21/35MM2 | X* | | | | |
| JB-EX-25/35MM2 | X* | | | | |
| JB-EX-32/35MM2 | X* | | | | |
| JB-EX-42-EP | X* | | | | |
| JBU-100(-L)-E(P) | | | | X | |
| JB-EX-40-EP | | | | X | |
| JB-EX-41-EP | | | | X | |
| MONI-PT100-EXE | X | | X | | |
| MONI-PT100-NH | X | | X | | |
| MONI-PT100-4/20mA | X | | X | | |
| RAYSTAT V5 | | | | X | |
| RAYSTAT-EX-02 | X | | | X | |
| ETS-05 | X | | | | |
| Elexant 5010i & Elexant 5010-LIM | | X | | X | |
| T-M-10-S/+x+y | X | | | | |
| T-M-20-S/+x+y(/EX) | | X | | X | |

^{*} Use 2 brackets per junction box

Technical details

| Plate size (mm) X x Y | 130 x 130 | 220 x 120 | 80 x 80 | 220 x 232 |
|--------------------------------|-----------|-----------|---------|-----------|
| Distance pipe-plate (mm) | 100 | 120 | 100 | 100 |
| Number of pipe straps required | 2 | 2 | 1 | 2 |
| Max. pipe temperature (°C) | 230 | 230 | 230 | 230 |
| Weight (kg) | 0.48 | 0.66 | 0.2 | 0.9 |







Warning labels

Warning labels indicate the presence of electrical heat-tracing under the insulation of the pipe or other equipment. (min. of 1 label per 5 m of heat-tracing line). Also suitable for stainless steel pipes.



| Language | EHT label reference | Product number |
|-------------------------------|---------------------|----------------|
| Arabian | LAB-ETL-AR | 036236-000 |
| Bulgarian | LAB-ETL-BG | 1244-002183 |
| Czech | LAB-ETL-CZ | 731605-000 |
| Danish | LAB-ETL-DK | C97690-000 |
| Dutch | LAB-ETL-NL | 749153-000 |
| English | LAB-I-01 | 938947-000 |
| Estonian/English | LAB-ETL-EN/EE | 1244-001415 |
| Finnish/Swedish | LAB-ETL-SE/FI | 756479-000 |
| French | LAB-I-05 | 883061-000 |
| German/French/Italian (230 V) | LAB-ETL-DE/FR/IT | 148648-000 |
| German | LAB-ETL-DE | 597779-000 |
| Hungarian | LAB-ETL-HU | 623725-000 |
| Italian | LAB-ETL-IT | C97688-000 |
| Kazakh/Russian/English | LAB-ETL-KZ/RU/EN | 1244-017393 |
| Latvian | LAB-ETL-LV | 841822-000 |
| Lithuanian | LAB-ETL-LT | 105300-000 |
| Norwegian | LAB-ETL-NO | C97689-000 |
| Norwegian/English | LAB-ETL-EN/NO | 165899-000 |
| Polish | LAB-ETL-PL | 258203-000 |
| Portuguese | LAB-ETL-PT | 945960-000 |
| Romanian | LAB-ETL-RO | 902104-000 |
| Russian | LAB-ETL-RU | 574738-000 |
| Russian/English | LAB-ETL-EN/RU | 1244-001060 |
| Russian/English/Azeri | LAB-ETL-AZ/RU/EN | 1244-012283 |
| Russian/English/Uzbek | LAB-ETL-UZ/RU/EN | 1244-022143 |
| Spanish | LAB-ETL-ES | C97686-000 |
| Swedish | LAB-ETL-SE | 691703-000 |
| Turkish/English | LAB-ETL-EN/TR | 1244-014860 |



| Language | Component label reference | Product number |
|-----------------|-----------------------------|---------------------------|
| English | LAB-I-02 | 774499-000 |
| Russian/English | LAB-I-02/E/R LAB-ENDSEAL | 1244-001059 146909-000 |
| English | ETL-END-SEAL LAB-SPLICE | 103405-000 007063-000 |

Stabilized design labels

If compliance to the T-class or A.I.T. cannot be achieved by the unconditional T-rating of the heating cable, the hazardous area regulations require that cable sheath temperature is determined by the rules of stabilized design as per EN 60079-30 and the heating design information is appropriately documented. For series heating designs, the following labels are available for physical marking of circuits in the field (min.1 label per heating circuit).

PI-LABEL-EX

Aluminum tag plate. To be installed when series polymer insulated XPI & XPI-S heating cables are used in hazardous areas.

PN: 1244-006940 Weight: 0.04 kg

PI-LABEL-NH


Aluminum tag plate. To be installed when series polymer insulated XPI & XPI-S heating cables are used non hazardous areas.

This label is not mandatory but highly recommended for future reference.

PN: 1244-006941 Weight: 0.04 kg


PIPE STRAPS

Metal straps for pipe mounting of integrated power connections, above the insulation tees and end seals as well as support brackets and the tubular insulation entry. Banding: stainless steel



| Pipe outer diameter in mm | (inches) | Pipe strap | PN (Weight) |
|---------------------------|----------------|------------|-----------------------|
| 20 - 47 | (1/2" - 11/4") | PSE-047 | 700333-000 (0.017 kg) |
| 40 - 90 | (11/4" - 3") | PSE-090 | 976935-000 (0.024 kg) |
| 60 – 288 | (2" - 10") | PSE-280 | 664775-000 (0.052 kg) |
| 60 - 540 | (2" - 20") | PSE-540 | 364489-000 (0.052 kg) |

PROTECTIVE GROMMET



G-02

Silicone grommet that protects the heating cable at sharp edges such as endplates of insulation cladding, flanges etc. It can be cut-to-length and resists temperatures up to 215°C.

Sold in pieces of 1 m.

PN: 412549-000 Weight: 0.37 kg/m

FIXING MATERIALS

Self-adhesive tape for fixing the heating cables on pipes or other equipment.



GT-66

Glass cloth tape for attaching heating cable to pipe.

Not for stainless steel pipes or for installation temperatures below 5°C.

20 m per roll, 12 mm width.

PN: C77220-000 Weight: 0.053 kg

GS-54

Glass cloth tape for attaching heating cable to pipe.

For stainless steel pipes or for any installation below 5°C.

16.5 m per roll, 12 mm width.

PN: C77221-000 Weight: 0.048 kg



ATE-180

Aluminium tape* for attaching heating cables and thermostat sensors to pipes and tanks. Minimum installation temperature: 0°C. Also suitable for stainless steel pipes.

55 m per roll, 63.5 mm width.

PN: 846243-000 Weight: 0.84 kg

*Power output of selfregulating heating cables might increase when installed with aluminium tape or other heat transfer aids. Please use TraceCalc or contact nVent representative for further details.



HWA-METAL-MESH-SS-50MM-10M

Stainless steel mesh for fixation of heating cables on valves, pumps or other odd-shaped surfaces. This mesh provides optimum contact and heat transfer between heating cables and heated equipment and can be used for exposure temperatures up to 400°C.

10 m per roll, 50 mm width.

PN: 1244-005772 Weight: 0.36 kg














HWA-PI-FIX- SS-xMM-10M

Stainless steel clip band to attach Polymer Insulated series heating cables to pipes. Clips at regular distances to allow for even heater spacing. Band available in two sizes for different diameter ranges.

10 m per roll.

For diameters up to 5 mm, HWA-PI-FIX-SS-5MM-10M

PN: 1244-007768 Weight: 0.32 kg

For diameters up to 8 mm, HWA-PI-FIX-SS-8MM-10M


PN: 1244-007769 Weight: 0.52 kg

Available Pipe Straps

Stainless steel pipe straps for holding MI cable onto pipe. Tighten with pliers.

Allow one strap per 30 cm of pipe

| Part No. | Pipe Diameter | Packing Qty |
|----------|--------------------------|-------------|
| PB 125 | to 1 ¼" (32 mm) | 50 pc |
| PB 300 | 1 ½" to 3" (38 – 75 mm) | 35 pc |
| PB 600 | 3 ½" to 6" (89 – 150 mm) | 25 pc |
| PB 1000 | 6" to 10" (150 – 250 mm) | 1 pc |
| PB 1200 | to 12" (300 mm) | 1 pc |
| PB 2400 | to 24" (600 mm) | 1 pc |
| PB 3600 | to 36" (900 mm) | 1 pc |



SNLS

Plain stainless steel banding/strip for holding MI cables in place on pipes.

30 m roll. Secured with buckles.



SNLK

Stainless steel buckles for use with metal banding strip type SNLS.



RMI-TW

Tie wire for fastening steel heating cables on pipes. Especially suitable for irregular shaped objects such as pumps, valves, flanges. Supplied in 50 m reels.

Do not use with copper or cupro nickel sheathed heating cables; use straps wherever possible.


| Allowances for tie wire and banding on pipes. | | | | | | | | | | | | | | | | |
|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|
| Pipe Size (mm) | 25 | 40 | 50 | 100 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 600 | 750 | 900 | 1200 |
| Required length (m) per m of pipe | 0.8 | 1.1 | 1.2 | 1.6 | 2.1 | 2.8 | 3.5 | 4.2 | 4.6 | 5.2 | 5.9 | 6.5 | 7.9 | 9.8 | 11.8 | 15.7 |



FT-19/FT-20

Zinc-plated metal mesh (FT-19) or stainless steel metal mesh (FT-20) for holding MI heating cables in place on pipes, tanks or other equipment.

Supplied in 25 m rolls (approx. width 1 m).



HARD-SPACER-SS-25MM-25M

Stainless steel spacer for fixing the heating cable on walls, tanks and vessels, etc.

Width spacer: 12.5 mm.

Fixing distance for cables: each 25 mm.

25 m per roll.

PN: 107826-000 Weight: 1.10 kg

nVent.com/RAYCHEM | 271

HWA-WAGO-TSTAT-KIT

Thermostat kit with supplementary terminals to connect thermostats of type RAYSTAT-EX-02 to the junction boxes JBS, JBM and JBU.

The kit includes 2 terminals Spring-type terminals $(1 \times L, 1 \times PE)$, 1 power cable gland GL-36-M25, 1 end plate and 1 installation instruction.

PN: 966659-000 Weight: 0.073 kg

HWA-WAGO-PHASE

Phase/neutral terminal (Ex e), spare part for various junction boxes, max. 10 mm² solid/stranded.

PN: 633476-000 Weight: 0.019 kg

HWA-WAGO-EARTH

Earth terminal (Ex e), spare part for various junction boxes, max. 10 mm² solid/stranded.

PN: 911505-000 Weight: 0.027 kg

HWA-WAGO-ENDPLATE

End plate for HWA-WAGO-..., 10 mm² terminals, spare part.

PN: 983674-000 Weight: 0.003 kg

HWA-WAGO-JUMPER

Jumper to bridge HWA-WAGO-..., 10 mm² terminals, spare part.

PN: 550942-000 Weight: 0.0004 kg

HWA-WDM-PHASE-35

Phase/neutral screw terminal (Ex e), spare part for JB-EX-xx/35MM2 junction boxes, max. $35 \, \text{mm}^2$ solid/stranded.

PN: 1244-006990 Weight: 0.052 kg

HWA-WDM-EARTH-35

Earth screw terminal (Ex e), spare part for JB-EX-xx/35MM2 junction boxes, max. 35 mm² solid/stranded.

PN: 1244-006992 Weight: 0.077 kg

HWA-WDM-EARTH-10

Earth screw terminal (Ex e), spare part for JB-EX-xx/35MM2 junction boxes,

max. 10 mm² solid/stranded.

PN: 1244-006994 Weight: 0.030 kg

HWA-WDM-JUMPER-35-2

Jumper to bridge two HWA-WDM... 35 mm² terminals, spare part

PN: 1244-006995 Weight: 0.013 kg

HWA-WDM-JUMPER-35-3

Jumper to bridge three HWA-WDM-... 35 mm² terminals, spare part

PN: 1244-006996 Weight: 0.020 kg

HWA-WDM-PLATE

End plate for HWA-WDM-... 35 mm² terminals, spare part

PN: 1244-007004 Weight: 0.005 kg































GL-33

34" NPT power cable gland for RAYSTAT-EX-02 ((Ex) II2GD / Ex db IIC / Ex eb IIC / Ex tb IIIC) Nickel plated brass, silicone grommet.

For use with armoured power cables with outer sheath diameter of 13.5 - 21 mm and inner sheath diameter of 10 - 15.5 mm.

PN: 1244-017517 Weight: 0.14 kg

GL-34

34" NPT power cable gland for RAYSTAT-EX-02 (⟨€x⟩ II2GD / Ex db IIC / Ex eb IIC / Ex tb IIIC) Nickel plated brass, silicone grommet.

For use with non-armoured power cables with outer sheath diameter of 10 – 15.5 mm.

PN: 1244-017518 Weight: 0.08 kg

GL-36-M25

M25 power cable gland (Il 2 GD Ex eb IIC Gb / Ex tb IIIC Db) Polyamide.

For use with non-armoured power cables with outer diameter range 8-17,5 mm.

Temperature range: -20°C/+70°C.

Spare part for JBS-100, JBM-100 and JBU-100. PN: 1244-019082 Weight: 0.016 kg

GL-38-M25-METAL

M25 power cable gland (() II 2 GD / Ex db IIC / Ex tb IIIC) for use with junction boxes with internal earth plate (-EP) or metal boxes.

Nickel plated brass, silicone grommet.

For use with armoured power cables with sheath diameter of 13.5 – 21 mm and inner sheath diameter 10 - 15.5 mm.

PN: 056622-000 Weight: 0.15 kg

C20-PI-PA-KIT

Cable gland (Ex eb), polyamide for use with PI cables with a diameter range of 4-13 mm, up to -40°C. With green/yellow sleeve.

PN: 1244-019669 Weight: 0.02 kg

C20-PI-M0-KIT

Cable gland (Ex eb), Ni plated brass for use with PI cables with a diameter range of 5-14 mm in conjunction with junction boxes with earth plate or with polymer junction boxes and an earth lug, up to -55°C. With green/yellow sleeve.

PN: 1244-019670 Weight: 0.71 kg

GL-45-M32

M32 cable gland (Ex eb), polyamide for use with power cables with a diameter range of 12 - 21 mm.

PN: 1244-000 847 Weight: 0.028 kg

GL-51-M40

M40 cable gland (Ex eb), polyamide for use with power cables with a diameter range of 17 - 28 mm.

PN: 1244-007003 Weight: 0.045 kg

GL-55-M25

M25 power cable gland (Ex eb) Polyamide.

For use with non-armoured power cables with outer diameter range 8 – 15 mm.

Temperature range: -55°C/+70°C

Spare part for JBS-100, JBM-100, JBU-100, JB-EX-20(-EP), JB-EX-40-EP, JB-EX-41-EP,

JB-MB-25/16MM2 and JB-MB-26/16MM2 PN 1244-019083 Weight: 0.016 kg











HWA-PLUG-M20-EXE-PLASTIC

M20 stopping plug Ex eb, up to -55°C.

Polyamide.

Spare parts for various junction boxes. PN: 1244-000 845 Weight: 0.003 kg

HWA-PLUG-M25-EXE-PLASTIC

M25 stopping plug Ex eb, up to -55°C.

Polyamide.


Spare parts for various junction boxes. PN: 434994-000 Weight: 0.007 kg

ADAPTORS/REDUCERS









| Prod description | Male | Female | Hazardous area approved | Material | Extra accessories | Product number (Weight) |
|-----------------------------|--------|--------|-------------------------------|--------------------|-------------------------------------|----------------------------|
| REDUCER-M25/ M20-EEXE | M25 | M20 | Ex eb | Polyamide | None | 1244-002089 (0.021 kg) |
| REDUCER-M32/ M25-EEXE | M32 | M25 | Ex eb | Polyamide | None | 1244-000859 (0.009 kg) |
| REDUCER-M40/M32 | M40 | M32 | Ex eb | Polyamide | O-ring | 1244-007007 (0.016 kg) |
| ADPT-PG16-M25-EEXE | M25 | PG16 | Ex eb | Polyamide | O-ring | 541892-000 (0.020 kg) |
| REDUCER-M25/20-EEXD | M25 | M20 | Ex db / eb | Brass | O-ring | 404287-000 (0.07 kg) |
| REDUCER-M25/20 | M25 | M20 | Ex db / eb | Brass | Locknut, Fibre washer, O-ring | 630617-000 (0.07 kg) |
| REDUCER-M25/ M20-EEXD-SS | M25 | M20 | Ex db / eb | Stainless steel | O-ring | 1244-002090 (0.028 kg) |
| REDUCER-1NPT/ PG16-EEXD | 1" NPT | PG16 | Ex db / eb | Stainless steel | None | 414478-000 (0.10 kg) |
| REDUCER-1NPT/M25 | 1" NPT | M25 | Ex db / eb | Stainless steel | None | 1244-000953 (0.55 kg) |
| REDUCER-M25/ PG16-EEXE | PG16 | M25 | Ex eb | Polyamide | O-ring | 953780-000 (0.03 kg) |
| ADAPTOR-M20/25 | M20 | M25 | Ex d | Brass | Locknut and O-ring | 492799-000 (0.092 kg) |
| ADPT-M20/25-EEXD | M20 | M25 | Ex db / eb | Brass | O-ring | 684953-000 (0.09 kg) |

SMALL PIPE ADAPTORS



JBS-SPA

Small pipe adaptor required for pipes ≤ 1" (DN25), applicable for JBS-100, E-100, E-100-L E90515-000 (bag of 5 adaptors) Weight: 0.14 kg

JBM-SPA

Small pipe adaptor required for pipes ≤ 1" (DN25), applicable for JBM-100, T-100 D55673-000 (bag of 5 adaptors) Weight: 0.40 kg



JBS-100-STAND-OFF

Junction box stand off

P000003408

For insulation ≥ 120 mm & ≤ 180 mm*

Weight (net) = 135 g

*Consider extra pipe strap length 6-9" (150-225 mm) for attachment.

JBM-100-STAND-OFF

Junction box stand off

P000003624

For insulation ≥ 120 mm & ≤ 180 mm*

Weight (net) = 272 g

*Consider extra pipe strap length 6-9" (150-225 mm) for attachment.

POWER SUPPLY




MONI-RMC-PS24

24 Vdc stabilized power supply

Wide range input (100 – 240 Vac) power supply to provide.

24 Vdc input for MONI- RMC-BASE. Surface or DIN 35 rail mounted.

PN: 972049-000 Weight: 0.28 kg



MONI-PS12

12 Vdc stabilized power supply

Wide range input (100 - 240 Vac) power supply to provide 12 Vdc input for the nVent RAYCHEM NGC-30-CRM-E and nVent RAYCHEM NGC-30-CRMS-E cards. DIN 35 rail mountable.

PN: 1244-001505 Weight: 0.18 kg









Greenlee Communications Sidekick Plus



CONNECT AND PROTECT

Hand held cable fault locator

PRODUCT OVERVIEW



The Greenlee Sidekick Plus is a cable fault locater working on the principles of Time Domain Reflectometry or TDR. The Sidekick Plus is a hand held cable fault locater from the latest generation. It gives genuine universal performance for short and long-range applications on all types of metallic cable including many types of heating cable. Innovative features result in a versatile, cable-test instrument that is remarkably easy to use.

The Greenlee Sidekick Plus sold via nVent is preloaded with the nVent heat-tracing cable characteristics.

Principles of operation

If a cable is metal and it has at least two conductors, it can be tested by a TDR. TDRs will troubleshoot and measure all types of cables. The TDR works on the same principle as radar. A pulse of energy is transmitted down the cable under test. When that pulse reaches the end of the cable, or a fault along the cable, part or all of the pulse energy is reflected back to the instrument. The TDR measures the time it takes for the signal to travel down the cable, see the problem, and reflect back. The TDR then converts this time to distance and displays the information as a waveform and/or distance reading.

The Sidekick Plus can be used to locate and identify faults in all types of metallic paired cables including heating cables. TDRs can locate both major and minor cabling problems including: sheath faults, broken conductors, water damage, loose connectors, crimps, cuts, smashed cables, shorted conductors, system components, and a variety of other fault conditions. In addition, TDRs can be used to test reels of cable for shipping damage, cable shortages, cable usage, and inventory management. The speed and accuracy of the Sidekick Plus makes it today's preferred method of cable fault location.

- Easy single-handed operation
- · Light hand-held instrument for long and short range applications
- · Usable for high variety of metallic cables
- Cable attenuation compensation and narrow pulse for clear and simple trace display
- · Large, high resolution display
- Tactile push buttons
- · Proven durability

PRODUCT SPECIFICATIONS

| Stress Test | 0 to 82 dBrnC |
|--------------------------------------|--|
| AC Volts | 250 V |
| DC Volts | 300 V |
| Resistance | 100 ΜΩ |
| Leakage | 999 ΜΩ |
| Open Meter | Up to 18.6 miles (30 km) |
| Count Load Coils | 0 to 5 |
| Loop Current | 110 mA |
| Circuit Loss | -70 to 3 dBm |
| Circuit Noise | 0 to 90 dBrnC |
| Tracing Tone Generator | 200 Hz to 20 kHz |
| Reference Tone Output Level | 3 to −20 dBm |
| Custom Auto Test with Pass / Fail | 400 Autotest Results |
| Display Resolution | 320 x 240 sunlight readable |
| Battery | Li-ion |
| Battery Life (Typical) | 8 hours |
| Weight (Including Battery) | 3 lbs (1.4 kg) |
| Operating Conditions | −0.4°F to 122°F (−18°C to 50°C), 0 to 95% Humidity |
| IP Rating / Environmental Protection | BS EN 60529 level IP20CW |
| EAC certified | Yes |
| | |

ORDERING INFORMATION

| Part description | Sidekick Plus |
|------------------|---------------|
| PN (Weight) | 1244-020944 |










RAYCHEM

Stripping-Tool-SR-Cable

CONNECT AND PROTECT

Stripping tool for nVent RAYCHEM self-regulating cables

PRODUCT OVERVIEW

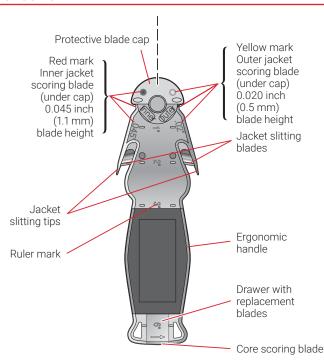

The nVent RAYCHEM Stripping-Tool-SR-Cable is designed for use with nVent RAYCHEM BTV-CR, BTV-CT, QTVR-CT, XTVR-CT, HTV-CT, HWAT, XL-Trace, IceStop and RaySol selfregulating heat-tracing cables. The tool is designed for faster, safer and more reliable cable terminations.

The tool has two sets of blades designed for precise scoring of the outer and inner jackets of the cables mentioned above. The scoring blades are protected by a spring-loaded cap that rotates automatically. For safety, the cap rotates back to its original position automatically after the cutting operation is performed.

The tool also includes a unique core scoring feature that prevents damage to the conductors. The tool has a robust metallic body, ergonomic contour and replaceable blades.

PRODUCT SPECIFICATIONS

| Technical details | |
|-----------------------|---|
| Body | Symmetric and Ergonomic Aluminum A380 Metallic Body with TPE soft sleeve. |
| Jacket scoring blades | A pair of jacket scoring stainless steel blades with depth ranges of 0.04–0.06 inch (1–1.5 mm) and 0.01–0.03 inch (0.25–0.75 mm). |
| Blade cover | Spring loaded Zinc alloy cap that covers both the blades when the tool is not in use. |
| Core scoring feature | Core scoring blade which will prevent damage to the conductors. The blade height should be 0.01–0.04 inch (0.25–1 mm). |
| Replaceable blades | All blades can be replaced with a screwdriver. Replaceable blades are provided with the tool. |
| Coating | Metallic body coated with electrostatic epoxy powder 0.002–0.005 inch (0.05–0.1 mm) thick. |

ORDERING INFORMATION

| | Catalog Number | Part Number |
|-----------------------------------|--|--|
| Stripping tool | Stripping-Tool-SR-Cable | P000001126 |
| Replacement jacket scoring blade | Techni Edge® #10 Hobby blade TE01-103 | Should be ordered directly from Techni Edge. |
| Replacement jacket slitting blade | Techni Edge % inch (9.5 mm) 13 point blade TE01-333 | Should be ordered directly from Techni Edge. |

Accessories


PI-TOOL-SET-xx



CONNECT AND PROTECT

Toolbox for electrical connection system for PI heating cables

PRODUCT OVERVIEW

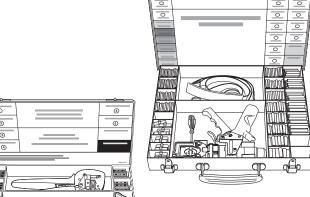

PI-TOOL-SET-02

The nVent RAYCHEM PI-TOOL-SET-xx is a handy metal box containing all materials required to connect Polymer Insulated (PI) heating cables to a suitable cold lead and also to splice two PI heating cables. Electrical continuation is maintained via specially engineered crimps, which provide a highly reliable electrical (gas tight) connection.

In order to assure consistently reliable connections, the crimp is to be performed with the specified crimp tool (PI-TOOL-xx) equipped with the appropriate crimping dies (CD-PI-xx). Different tools are available: a mechanical tool for connecting small size cables (up to 2.5 mm²) and an hydraulic tool for large size cables (from 4 to 25 mm²).

Apart from the crimp tool and dies, the kit contains a variety of crimps (CRP-PI-xx). The tables on this datasheet are providing an overview of the possible combinations of tools, dies and crimps for various PI heating cables. Packs containing 10 pc of crimps are available as spare parts. Connection kits providing the insulation of the connection, have to be ordered separately.

Application

Electrical connection system for Polymer Insulated (PI) heating cables.

Kit contents

| | PI-TOOL-SET-01 | PI-TOOL-SET-02 |
|---------------|--------------------------------------|--|
| Crimp tool | PI-TOOL-01 | PI-TOOL-02 |
| Crimping dies | CD-PI-02 | CD-PI-03, CD-PI-04, CD-PI-05, CD-PI-06 |
| Crimps | PI-CRP-01N, PI-CRP-02N, PI-CRP-03N, | PI-CRP-07 to PI-CRP-017 (50 pcs each) |
| | PI-CRP-04 to PI-CRP-06 (50 pcs each) | PI-CRP-18 to PI-CRP-24 (25 pcs each) |

ORDERING INFORMATION

PI-TOOL-SET-01

| Part number (Weight) | 1244-000583 (2.5 kg) | 1244-000584 (12.5 kg) |
|----------------------|----------------------|-----------------------|











General Accessories

| Crimp tool set with various inserts and crimps | Part number | |
|--|-------------|---|
| PI-TOOL-SET-01 | 1244-000583 | Complete set for cold leads/heating cables up to 2.5 mm ² |
| PI-TOOL-SET-02 | 1244-000584 | Complete set for cold leads/heating cables from 4 to 25 mm ² |

| Crimp tools (spare part) | Part number | Crimping dies (spare part) | Part number |
|--------------------------|-------------|----------------------------|-------------|
| PI-TOOL-01 | 1244-000549 | CD-PI-02 | 1244-000554 |
| PI-TOOL-02 | 1244-000551 | CD-PI-03 | 1244-000552 |
| | | CD-PI-04 | 1244-000553 |
| | | CD-PI-05 | 1244-000555 |
| | | CD-PI-06 | 1244-000556 |

Compatibility- and selection chart and selection for crimps, dies and tools

Table 1: PI-TOOL-SET-01 for conductor size $\leq 2,5 \text{ mm}^2$

| Table 1 | ITTOOL SET OTTOI CONGUCTO | 312E 2 2,0 111111 | | | | |
|---------------|---|---|----------------------------------|-------------|-------------------------------|------------|
| | Possible combinations for all XPI (XPI-NH, XPI, XPI-S) heating cables (Ω/km) | Crimp type | Part number (10 pieces per pack) | | Spare tool & crimping dies | |
| Kit | FROM | то | | | Die | Tool |
| | | | © · | | | |
| CS-150-2.5-PI | 65 / 100 (only XPI-F) / 180 / 200 / 380 / 480 / 600 / 700 / 810 / 1000 / 1440 / 1750 /2000 / 3000 / 4000 4400 / 5600 / 7000 / 8000 | 65 / 100 (only XPI-F) / 180 / 200 / 380 / 480 / 600 / 700 / 810 / 1000 / 1440 / 1750 / 2000 / 3000 / 4000 / 4400 / 5600 / 7000 / 8000 | PI-CRP-01N | 1244-016256 | | PI-T00L-01 |
| | 11.7 | 65 / 100 (only XPI-F) / 180 / 200 / 380 / 480 / 600 / 700 / 810 / 1000 / 1440 / 1750 / 2000 / 3000 / 4000 / 4400 / 5600 / 7000 / 8000 | PI-CRP-02N | 1244-016257 | CD-PI-02 (black) | |
| | 11.7 / 15 / 17.8 / 25 / 50 / 80 / 100 (only XPI & XPI-S) / 150 / 320 | 11.7 / 15 / 17.8 / 25 / 50 / 80 / 100 (only XPI & XPI-S) / 150 / 320 | PI-CRP-03N | 1244-016258 | | |
| | 7 / 10 / 11.7 / 31.5 / 100 (only XPI & XPI-S) | 65 / 100 (XPI-F only) 180 /200 / 380 / 480 / 600 / 700 / 810 / 1000 / 1440 / 1750 / 2000 / 3000 / 4000 / 4400 / 5600 / 7000 / 8000 | PI-CRP-04 | 1244-016259 | | |
| | 7 / 10 / 11.7 / 31.5 / 100 (only XPI & XPI-S) | 11.7/ 15 / 17.8 / 25 / 50 / 80 / 100 (XPI & XPI-S only) 150 / 320 | PI-CRP-05 | 1244-016260 | | |
| | 7 / 10 / 11.7 / 31.5 / 100 (only XPI & XPI-S) | 7 / 10 / 11.7 / 31.5 / 100 (only XPI & XPI-S) | PI-CRP-06 | 1244-016261 | | |

Important: The electrical insulation for the crimp connection has to be ordered separately (CS-150-xx-PI). If the inscriptions on crimps PI-CRP-01N, PI-CRP-02N and PI-CRP-03N do not contain 'N', please do no longer use. Contact nVent for more information.

Crimp selection and installation table

Table 2: PI-TOOL-SET-02 for conductor size 4 to 25 mm²

| | Possible combinations for all XPI (XPI-NH, XPI, XPI-S) heating cables (Ω/km) | Crimp type | Part number (10 pieces per pack) | | Spare tool & crimping dies | |
|--------------|--|---|----------------------------------|-------------|-------------------------------|------------|
| Kit | FROM | то | | | Die | Tool |
| CS-150-6-PI | | | Ø · | | | |
| | 4.4 | 11.7 / 15 | PI-CRP-07 | 1244-016262 | 0D DI 00 | PI-TOOL-02 |
| | 4.4 | 7 / 10 | PI-CRP-08 | 1244-016263 | CD-PI-03 (Grey) | |
| | 4.4 | 4.4 | PI-CRP-09 | 1244-016264 | (Grey) | |
| | 2.9 | 11.7 / 31.5 / 100 (only XPI & XPI-S) | PI-CRP-10 | 1244-016265 | | |
| | 2.9 | 7 / 10 | PI-CRP-11 | 1244-016266 | CD-PI-04 | |
| | 2.9 | 4.4 | PI-CRP-12 | 1244-016267 | | |
| | 2.9 | 2.9 | PI-CRP-13 | 1244-016268 | (Blue) | |
| CS-150-25-PI | 1.8 | 7 | PI-CRP-14 | 1244-016269 | , , | |
| | 1.8 | 7 / 4.4 | PI-CRP-15 | 1244-016270 | | |
| | 1.8 | 2.9 | PI-CRP-16 | 1244-016271 | | |
| | 1.8 | 1.8 | PI-CRP-17 | 1244-016272 | | |
| | 1.1 | 4.4 | PI-CRP-18 | 1244-016273 | | |
| | 1.1 | 2.9 | PI-CRP-19 | 1244-016274 | (Red) | |
| | 1.1 | 1.8 | PI-CRP-20 | 1244-016275 | V + N | |
| | 1.1 | 1.1 | PI-CRP-21 | 1244-016276 | | |
| | 0.8 | 2.9 | PI-CRP-22 | 1244-016277 | CD-PI-06 | |
| | 0.8 | 1.8 | PI-CRP-23 | 1244-016278 | (Yellow) | |
| | 0.8 | 1.1 | PI-CRP-24 | 1244-016279 | V + N | |

Important: The electrical insulation for the crimp connection has to be ordered separately. (CS-150-xx-PI)

The crimp for the electrical connection of the braid is included in the CS-150-xx-PI kit

Table 3: CS-150-xx-PI braid crimps

| Kit | Cable family used in kit | Braid crimp to use | Part number | Die | Tool |
|---------------|--------------------------|--------------------|-------------|----------|------------|
| CS-150-2.5-PI | XPI-F | BR-CRP-1.5 | 1244-018980 | CD-PI-02 | PI-TOOL-01 |
| | XPI | BR-CRP-2.5 | 1244-016304 | CD-PI-02 | PI-TOOL-01 |
| | XPI-S | BR-CRP-2.5 | 1244-016304 | CD-PI-02 | PI-TOOL-01 |
| | XPI-F | BR-CRP-2.5 | 1244-016304 | CD-PI-02 | PI-TOOL-01 |
| CS-150-6-PI | XPI | BR-CRP-6 | 1244-016305 | CD-PI-03 | PI-TOOL-02 |
| | XPI-S | BR-CRP-6 | 1244-016305 | CD-PI-03 | PI-TOOL-02 |
| | XPI-F | BR-CRP-2.5 | 1244-016304 | CD-PI-02 | PI-TOOL-01 |
| CS-150-25-PI | XPI | BR-CRP-25 | 1244-016306 | CD-PI-04 | PI-TOOL-02 |
| | XPI-S | BR-CRP-25 | 1244-016306 | CD-PI-04 | PI-TOOL-02 |

Europe, Middle East, Africa

Tel +32 16 213 511 Fax +32 16 213 604 thermal.info@nVent.com

België / Belgique

Tel +32 16 21 35 02 Fax +32 16 21 36 04 salesbelux@nVent.com

Bulgaria

Tel +359 5686 6886 Fax +359 5686 6886 salesee@nVent.com

Česká Republika

Tel +420 602 232 969 czechinfo@nVent.com

Danmark

Tel +45 70 11 04 00 salesdk@nVent.com

Deutschland

Tel 0800 1818205 salesde@nVent.com

España

Tel +34 911 59 30 60 Fax +34 900 98 32 64 ntm-sales-es@nVent.com

France

Tél 0800 906045 salesfr@nVent.com

Hrvatska

Tel +385 1 605 01 88 Fax +385 1 605 01 88 salesee@nVent.com

Italia

Tel +39 02 577 61 51 Fax +39 02 577 61 55 28 salesit@nVent.com

Lietuva/Latvija/Eesti

Tel +370 5 2136633 Fax +370 5 2330084 info.baltic@nVent.com

Magyarország

Tel +36 1 253 7617 Fax +36 1 253 7618 saleshu@nVent.com

Nederland

Tel 0800 0224978 salesnl@nVent.com

Norge

Tel +47 66 81 79 90 salesno@nVent.com

Österreich

Tel 0800 29 74 10 salesat@nVent.com

Polska

Tel +48 22 331 29 50 Fax +48 22 331 29 51 salespl@nVent.com

Republic of Kazakhstan

Tel +7 7122 32 09 68 Fax +7 7122 32 55 54 saleskz@nVent.com

Serbia and Montenegro

Tel +381 230 401 770 Fax +381 230 401 770 salesee@nVent.com

Schweiz / Suisse

Tel +41 (41) 766 30 80 Fax +41 (41) 766 30 81 infoBaar@nVent.com

Suomi

Puh 0800 11 67 99 salesfi@nVent.com

Sverige

Tel +46 31 335 58 00 salesse@nVent.com

Türkiye

Tel +90 560 977 6467 Fax +32 16 21 36 04 salesee@nVent.com

United Kingdom

Tel 0800 969 013 salesthermalUK@nVent.com

Our powerful portfolio of brands:

CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER



nVent.com/RAYCHEM